




## Operation & Service Manual



**Model: 02A7898C0100-A1**  
**5 Ton Three Stage Jack**

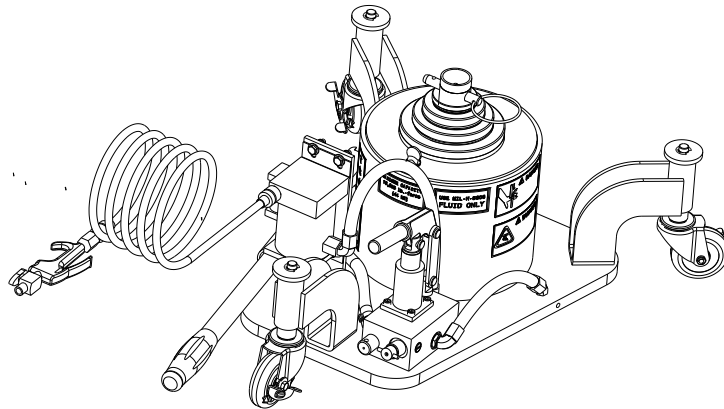

04/2016 - Rev. 01

**Includes Illustrated Parts Lists**

REVISION  
01

DATE  
04/2016

TEXT AFFECTED  
Original Release

**TABLE OF CONTENTS**

|   | <b><u>PAGE</u></b> |
|---|--------------------|
| <b>1.0 PRODUCT INFORMATION.....</b>                 | <b>1</b>           |
| 1.1 USAGE.....                                      | 1                  |
| 1.2 LIST OF DRAWINGS.....                           | 1                  |
| <b>2.0 SAFETY INFORMATION.....</b>                  | <b>1</b>           |
| 2.1 ALARM AND WARNING SYSTEMS.....                  | 1                  |
| 2.2 WARNING AND DANGER SIGNS.....                   | 1                  |
| 2.3 COMPONENT SAFETY FEATURES.....                  | 1                  |
| 2.4 FUNCTIONAL SAFETY FEATURES.....                 | 1                  |
| 2.5 FEATURES FOR OPERATOR SAFETY.....               | 1                  |
| 2.6 ENVIRONMENTAL SAFETY FEATURES.....              | 1                  |
| 2.7 NECESSARY PERSONAL PROTECTIVE EQUIPMENT.....    | 1                  |
| 2.8 SAFETY GUIDELINES.....                          | 2                  |
| 2.9 CONDITIONS FOR SAFE USE.....                    | 2                  |
| 2.10 OPERATOR QUALIFICATIONS.....                   | 2                  |
| 2.11 ADDITIONAL SAFETY MEASURES.....                | 2                  |
| 2.12 IN CASE OF HYDRAULIC LINE FAILURE.....         | 2                  |
| <b>3.0 PACKAGING AND STORAGE.....</b>               | <b>2</b>           |
| 3.1 PACKAGING REQUIREMENTS.....                     | 2                  |
| 3.2 HANDLING.....                                   | 2                  |
| 3.3 STRAPPING.....                                  | 2                  |
| 3.4 PACKAGING PROTECTION.....                       | 2                  |
| 3.5 LABELING OF PACKAGING.....                      | 2                  |
| 3.6 STORAGE COMPATIBILITY.....                      | 2                  |
| 3.7 STORAGE ENVIRONMENT.....                        | 2                  |
| 3.8 STORAGE SPACE AND HANDLING FACILITIES.....      | 3                  |
| <b>4.0 TRANSPORTATION.....</b>                      | <b>3</b>           |
| <b>5.0 ASSEMBLY.....</b>                            | <b>3</b>           |
| 5.1 GENERAL INSTRUCTIONS.....                       | 3                  |
| 5.2 PRE-USE CHECKS.....                             | 3                  |
| 5.3 PERSONNEL REQUIREMENTS.....                     | 3                  |
| 5.4 INSPECTION AND TEST PROCEDURES.....             | 3                  |
| <b>6.0 INSTALLATION.....</b>                        | <b>3</b>           |
| 6.1 AIR SUPPLY REQUIREMENTS.....                    | 3                  |
| <b>7.0 OPERATION.....</b>                           | <b>4</b>           |
| 7.1 OPERATING PARAMETERS.....                       | 4                  |
| 7.2 NUMERICAL VALUES.....                           | 4                  |
| 7.3 OPERATOR CONTROLS.....                          | 4                  |
| 7.4 OPERATING INSTRUCTIONS.....                     | 4                  |
| 7.4.1 Rules For Operating.....                      | 5                  |
| 7.4.2 Jack Instructions.....                        | 5                  |
| <b>8.0 TRAINING.....</b>                            | <b>7</b>           |
| <b>9.0 MAINTENANCE.....</b>                         | <b>7</b>           |
| 9.1 GENERAL.....                                    | 7                  |
| 9.2 MAINTENANCE SCHEDULE.....                       | 7                  |
| 9.2.1 Storage/Low Usage.....                        | 7                  |
| 9.3 REMOVING AND SERVICING PUMP.....                | 8                  |
| 9.4 JACK FUNCTION LOAD TEST.....                    | 8                  |
| 9.5 PNEUMATIC PUMP.....                             | 8                  |
| <b>10.0 TROUBLE SHOOTING.....</b>                   | <b>8</b>           |
| <b>11.0 PROVISION OF SPARES.....</b>                | <b>8</b>           |
| <b>12.0 IN-SERVICE SUPPORT.....</b>                 | <b>9</b>           |
| <b>13.0 GUARANTEES/LIMITATION OF LIABILITY.....</b> | <b>9</b>           |
| <b>14.0 APPENDICES.....</b>                         | <b>9</b>           |

This product can not be modified without the written approval of Tronair, Inc. Any modifications done without written approval voids all warranties and releases Tronair, Inc., its suppliers, distributors, employees, or financial institutions from any liability from consequences that may occur. Only Tronair OEM replacement parts shall be used.

## **1.0 PRODUCT INFORMATION**

**Name of Equipment:** 5 Ton Three Stage Jack

**Model Number:** See Nameplate for Serial Number.

**Manufactured by:** TRONAIR, INC. South 1740 Eber Rd., Holland, OH 43528-9794 USA

### **1.1 USAGE**

The device is intended to lift an aircraft by its fuselage and/or main wing with other hydraulic jacks arranged by position and quantity to provide proper balance, and in conjunction with the correct jack pad, whose maximum load on any one jack does not exceed the rated capacity of the jack.

The jacks are not intended for metal forming, metal working, or any purpose other than that stated above.

### **1.2 LIST OF DRAWINGS**

Reference Parts List and Illustrations.

## **2.0 SAFETY INFORMATION**

### **2.1 ALARM AND WARNING SYSTEMS**

None.

### **2.2 WARNING AND DANGER SIGNS**

See labels on unit.

#### **WARNING!**



**The ram locknuts are user operated safety devices. Failure to utilize these locknuts may result in personal injury or death.**

### **2.3 COMPONENT SAFETY FEATURES**

- **Ram Locknut** prevents lowering of the ram. The Ram Locknut must be lowered as the aircraft is being lifted.
- **Locknut Retaining Rings** prevent locknut from being unscrewed from 2<sup>nd</sup> and 3<sup>rd</sup> stage rams.
- **Hold to Run Air Valve** requires the operator to hold the air valve lever to raise the ram using the air pump. Releasing the air valve lever stops upward movement of the ram.
- **CE Hand Pump With Check Valve** prevents unintentional descent of aircraft if relief valve fails.

### **2.4 FUNCTIONAL SAFETY FEATURES**

- **Pressure Relief Valve** prevents overload during raising operations.

### **2.5 FEATURES FOR OPERATOR SAFETY**

- Hold to Run Air Valve
- Air Shut Off Valve
- Cautions and Instruction Labels Located on Jack
- Ram Locknuts
- Locknut Retention Rings on 2nd and 3rd Stages

### **2.6 ENVIRONMENTAL SAFETY FEATURES**

Jack is non-polluting. See Appendix V Material Safety Data Sheet for the recommended hydraulic fluid (MIL-PRF-5606).

### **2.7 NECESSARY PERSONAL PROTECTIVE EQUIPMENT**



#### **CAUTION!**

**Always wear safety glasses.**

**2.0 SAFETY INFORMATION** *(continued)***2.8 SAFETY GUIDELINES****CAUTION!**

Do not place hands on top of jack near ram locknuts while lowering jack.

Pinch points exist between top of jack and threads on ram.

- Never put hands between the aircraft and the jack pad; as after aircraft has been lowered, struts may have hung up.
- Never align jack under aircraft by pounding on jack legs. Dented legs may lead to jack collapse.
- Always lower ram locking nut(s) after jack is under load. Be sure ram nut(s) is seated fully after jacking.
- Always raise and lower jacks simultaneously so that aircraft remains level.
- Always use a tail or nose stand, as applicable, for additional stability.

**WARNING!**

The ram locknuts are user operated safety devices.

Failure to utilize these locknuts may result in personal injury or death.

**2.9 CONDITIONS FOR SAFE USE**

- Use in a clean dry environment on a level surface.
- Operate between -20° C and 50°C/-4° F and 122° F.

**2.10 OPERATOR QUALIFICATIONS**

This jack is intended to be used by the skilled and trained aircraft technician. The operator must be familiar with the jacking procedures for the aircraft to be raised, and the operation of the jack.

**Installation/Maintenance/Dismantling Qualifications:** This jack is to be installed, maintained, and dismantled by qualified technicians familiar with hydraulic systems.

**2.11 ADDITIONAL SAFETY MEASURES**

This jack must be used in accordance with this technical manual, and in accordance with the aircraft manufacturer's jacking procedures.

**2.12 IN CASE OF HYDRAULIC LINE FAILURE**

Ram Locknut prevents unintentional decent in case of hydraulic failure. It is important to keep Ram Locknut within 1 inch of bottom of ram when lowering or raising aircraft.

**3.0 PACKAGING AND STORAGE****3.1 PACKAGING REQUIREMENTS**

Jacks are to be packaged as required to prevent damage to legs or hydraulic equipment during shipment.

**3.2 HANDLING**

Jacks can be rolled by hand on its casters.

**3.3 STRAPPING**

Jacks can be strapped down by suitable means to prevent unwanted movement during shipment.

**3.4 PACKAGING PROTECTION**

No special packaging material for cushioning or suspension is required.

**3.5 LABELING OF PACKAGING**

Packaging should be labeled DO NOT DROP.

**3.6 STORAGE COMPATIBILITY**

No special considerations.

**3.7 STORAGE ENVIRONMENT**

- Store jacks between -20°C and +50°C/-4° F and 122° F.
- Always store jack with ram all the way down.
- Suitable for outdoor storage by using a full coverage waterproof tarp or canvas.

*3.0 Packaging and storage continued on following page.*

**3.0 PACKAGING AND STORAGE** *(continued)***3.8 STORAGE SPACE AND HANDLING FACILITIES**

- Minimum Closed Height: 11.6 in (29.5 cm)
- Mechanical Extension: 3 in (7.62 cm)
- Hydraulic Extension: 1st Stage: 4.88 in (12.4 cm)  
2nd Stage: 5.94 in (15.1 cm)  
3rd Stage: 6.70 in (17 cm)
- Maximum Height Obtainable: 32 in (81.3 cm)
- Weight: 162 lbs (73.5 kg)

**4.0 TRANSPORTATION**

Lifting can be accomplished by crane and strap through top of tripod, or by fork truck under lower tripod support. Approximate weight: 162 lbs (73.5 kg)

**5.0 ASSEMBLY**

This product is shipped completely assembled and tested and requires no further assembly before operation. The following sections apply when servicing the unit.

**5.1 GENERAL INSTRUCTIONS**

- This product should be assembled and/or repaired using good workmanship practices and proper tools. Bolts and elastic stopnuts should be tightened to a torque not to exceed industry standards for Grade '5' bolts.
- All replacement parts must be the same as or better than the original parts supplied.
- Dispose of waste per federal and local laws and regulations.
- No modifications are allowed that will adversely affect the jacks safety performance.
- The pressure relief valve is not serviceable. It must be replaced as a unit.

**5.2 PRE-USE CHECKS**

1. Refer to the Illustrated Parts List to identify and ensure that all parts are present.
2. Generally check over unit to assure the tightness of all nuts, bolts and fittings.
3. With rams completely collapsed, check hydraulic fluid level.
  - Replenish with MIL-PRF-5606 fluid as required.
  - Fluid level is full when  $\frac{1}{4}$ " from top of reservoir.

**NOTE:** Refer to fluid manufacturer's (Appendix V) material safety data sheet, and advisory for handling and disposal of fluid.

**5.3 PERSONNEL REQUIREMENTS**

This jack is to be assembled by qualified technicians familiar with hydraulic systems.

**5.4 INSPECTION AND TEST PROCEDURES**

1. Ensure fluid level is within  $\frac{1}{4}$ " from top of reservoir.
2. Raise ram to full stroke, and check for leaks.

**6.0 INSTALLATION**

Installation and commissioning requires connection of the hold to run air valve to an adequate air supply (Air Pump Equipped Models Only).

**6.1 AIR SUPPLY REQUIREMENTS**

- 90 - 100 psi (6.21 - 6.89 bar) recommended

## 7.0 OPERATION


### 7.1 OPERATING PARAMETERS

- The user shall work in accordance with the Operator Manual
- It is not allowed to work under the raised load until it is secured by suitable means, i.e. Ram Locknut
- The employer of the operator shall provide for all necessary training and give information about pumping and translating forces
- Operate between -20° C and 50°C/-4° F and 122° F
- Hydraulic pump operates with 90 – 100 psi (6.21 – 6.89 bar) air pressure

### 7.2 NUMERICAL VALUES

- Rated Capacity: 10,000 lbs (4,536 kg)
- Minimum Closed Height: 11.6 in (29.5 cm)
- Mechanical Extension: 3 in (7.62 cm)
- Hydraulic Extension: 1st Stage: 4.88 in (12.4 cm)  
2nd Stage: 5.94 in (15.1 cm)  
3rd Stage: 6.70 in (17 cm)
- Maximum Height Obtainable: 32 in (81.3 cm)
- Weight: 162 lbs (73.5 kg)
- Noise level is 64 dB(A) at a distance of 120 in (3,048 mm) at an inlet pressure of 100 psi (6.9 bar)

### 7.3 OPERATOR CONTROLS

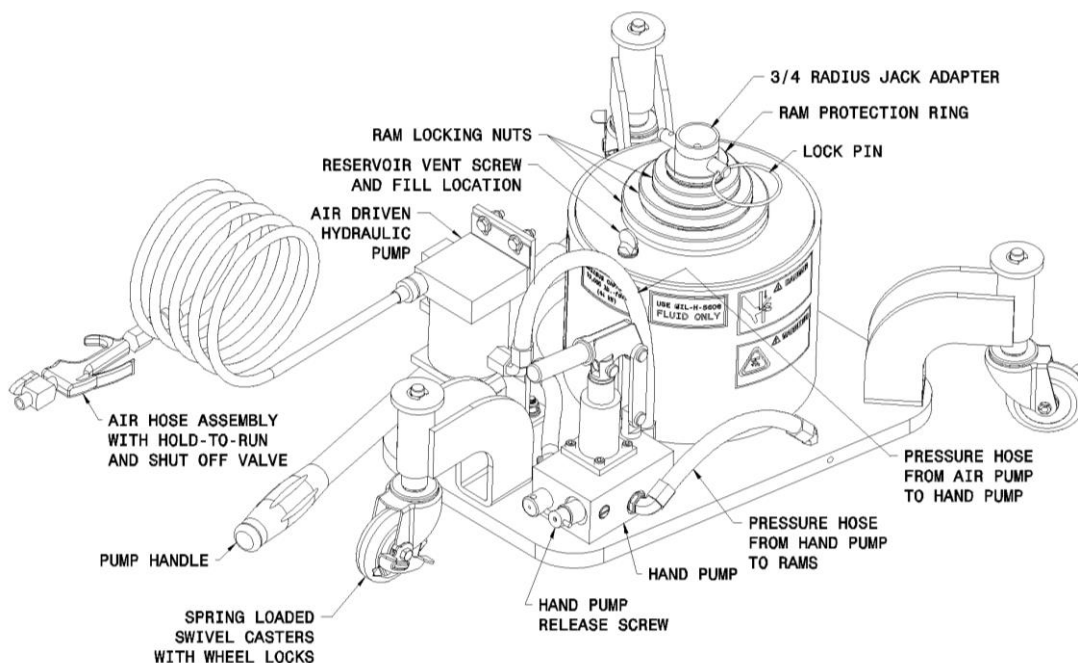

### 7.4 OPERATING INSTRUCTIONS

The user should be familiar with the following statements prior to using the jack(s):



#### CAUTION!

1. Never put hands between the aircraft and the jack pad; as after aircraft has been lowered, struts may have hung up.
2. Always lower ram locking nut(s) after jack is under load. Be sure ram nut(s) is seated fully after jacking.
3. Always raise and lower jacks simultaneously so that aircraft remains level.
4. Always use a tail or nose stand, as applicable, for additional stability.



#### WARNING!

When collapsing rams by hand miss-staging may occur and cause pinch points. To collapse ram, add a minimum 50 lb load to the mechanical extension. Keep hands and fingers clear of locking nuts. Failure to adhere to this safety instruction can cause injury.

7.4 Operating instructions continued on following page.

## 7.4 OPERATING INSTRUCTIONS *(continued)*

### 7.4.1 Rules For Operating

1. The user shall work in accordance with the Operator and/or Technical Manuals.
2. It is not allowed to work under the raised load until it is secured by suitable means, i.e. Ram Locknut.
3. The employer of the operator shall provide for all necessary training and give information about pumping and translating forces.
4. Operate between -20° C and 50°C/-4° F and 122° F.
5. Hydraulic pump operates with 90 – 100 psi (6.21 – 6.89 bar) air pressure

### 7.4.2 Jack Instructions

#### To Raise Aircraft:

1. Place jack on a hard, level surface.
2. Hydraulic rams must be completely retracted before operating the jack.
3. Raise mechanical extension as close to aircraft jack pad as possible.




#### WARNING!


The locking pin **MUST** be placed in the ram protection ring groove and fully through the mechanical extension.

The locking pin washer and ball lock **MUST** be placed outside the ram protection ring.

- Visually inspect the jack prior to every use.
- Do not place extra locking pins in any other hole on the mechanical extension.
- Insure mating surfaces to jack point are free of debris and damage.
- Under no conditions should the locking pin washer or washer groove be inside the ram protection ring groove.
- Under no conditions should the locking pin's ball lock be inside the ram protection ring groove.
- Never use the jack if the ram protection ring is not installed.
- Never use the locking pin without a locking pin washer.
- Never use a locking pin that has been damaged.
- Never use a ram protection ring that has been damaged or deformed.
- Replace ram protection ring if it does not have a radius groove for the locking pin.
- Load test jacks annually.
- Only order replacement parts from Tronair.
- Failure to comply could result in premature failure below certified weight and could cause serious injury including death.

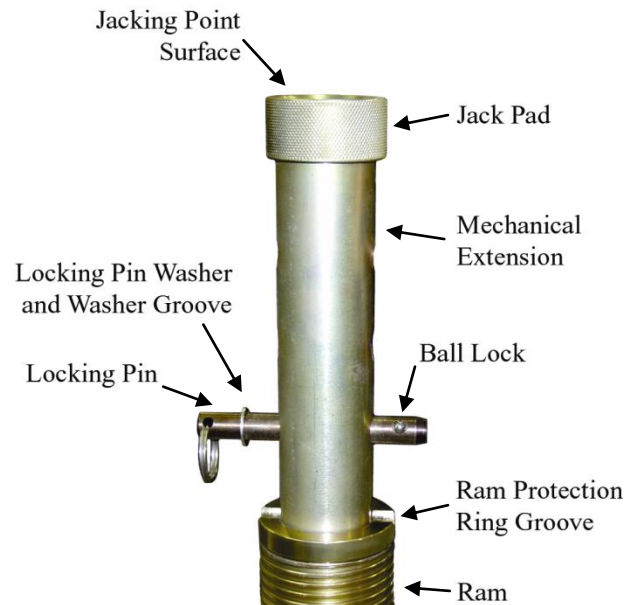

#### Correct Pin Placement

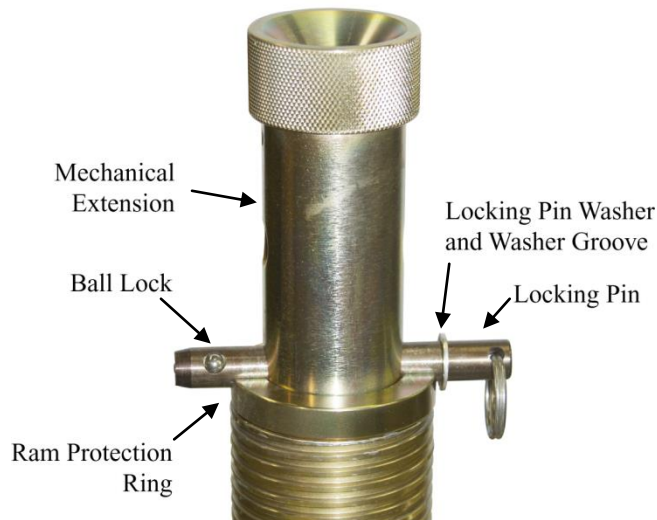

## 7.4.2 Jack Instructions (continued)

### Incorrect Pin Placements



Washer In  
Ram Protection Ring



Ball Lock In  
Ram Protection Ring




Washer On Top Of  
Ram Protection Ring




Locking Pin Not In  
Ram Protection Ring  
and top Locking Pin  
in Mechanical Extension  
(use only one pin)


### Results Of Locking Pin In Incorrect Location

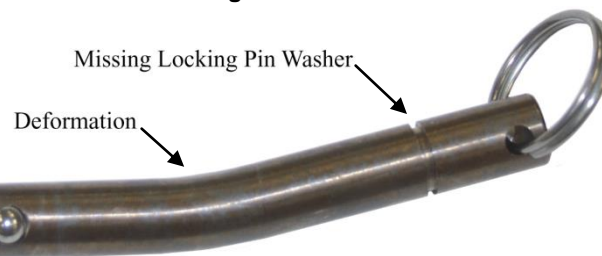

### Ram Protection Ring

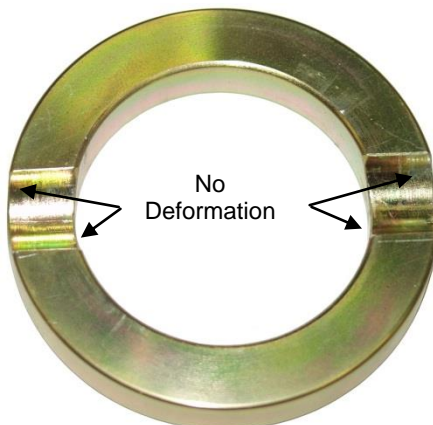

Acceptable Condition

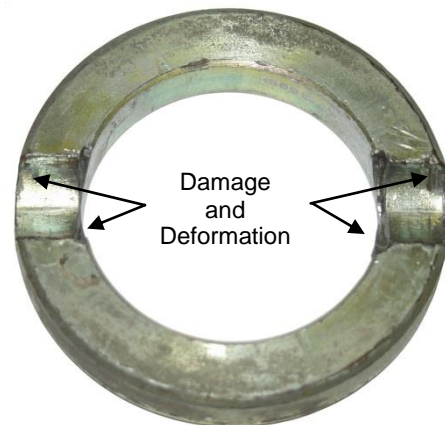

Unacceptable Condition

4. Close pump release valve and operate pump.
5. Hydraulic rams must extend in order from largest to smallest diameter.
6. Largest diameter hydraulic ram must fully extend before the next stage ram begins to raise.
7. Lower mechanical ram locknut(s) while extending rams. Keep within 1 inch of bottom of extending ram
8. Do not continue to operate air pump after all rams have fully extended.

7.4.2 Jack instructions continued on following page.

## 7.4.2 Jack Instructions (*continued*)



### WARNING!

The ram locknuts are user operated safety devices. Failure to utilize these locknuts may result in personal injury or death and/or damage to aircraft or equipment.

### To Lower Aircraft:

1. Lower all jacks simultaneously.
2. If ram locknut(s) is tight, raise jack slightly to release nut(s) ¼ inch from tripod.
3. Ensure proper staging as aircraft is being lowered: loosen ram locknut beginning with smallest ram (1" max) until stage is completely lowered. Repeat for next smallest stage.
4. Loosen pump release valve slightly to slowly lower aircraft.

**NOTE:** When using jack during washing operations, completely cover top of jack near ram seal.

### CAUTION!



Do not place hands on top of jack near ram locknuts while lowering jack. Pinch points exist between top of jack and threads on ram.

Always wear safety glasses.

## 8.0 TRAINING

Training of operating personnel is the responsibility of the employer. This jack must be used in accordance with aircraft manufacturer's instructions.

## 9.0 MAINTENANCE

### 9.1 GENERAL

- All maintenance and/or repair work should be done using good workmanship practices and proper tools.
- The work area should be clean and free of dirt.
- When O-rings and backup rings are removed, every effort should be made to avoid the contact of tools with the critical surfaces of parts. Surface deformities could cause degradation of seals and failure.
- It is good practice to replace both O-rings and back-up rings once removed. Cut and damaged O-rings normally result in fluid leakage.
- If cylinder bore is found to be rusty, it may be honed to a maximum diameter of .002 in (.05 mm) over on diameter and a surface finish of 16 micro inches. If pitting in the bore cannot be removed by this process, the jack cylinder must be replaced before the jack can be returned to service.
- At this time, flush old hydraulic fluid and dirt from overall system and replenish with new, clean hydraulic fluid.
- When refilling the hydraulic system the characteristics of the hydraulic fluid used in the jack and the level of the hydraulic fluid as it is noted on the jack shall be observed.
- Jacks shall be maintained and repaired in accordance with the manufacturer's instructions. Such maintenance and repair shall be carried out by qualified persons.
- No modifications shall be carried out which adversely affect the compliance of the jack with draft standard 2006/42/EC.

### 9.2 MAINTENANCE SCHEDULE

Check Fluid Level..... Each Use  
Lubricate Casters ..... NA  
Cleaning ..... Annually Or As Needed

**NOTE:** Wipe with soft cloth only, do no pressure wash or spray water directly at ram seal.

#### 9.2.1 Storage/Low Usage

If jack is unused for 90 days, raise ram to full hydraulic extension, spray ram with DoALL RPM, LPS or equivalent water repellent, BUNA N compatible lubricant.

## 9.2 MAINTENANCE SCHEDULE *(continued)*

### 9.3 REMOVING AND SERVICING PUMP

**NOTE: If pump is found faulty, call the factory for replacement or replace seals as follows:**

1. Review Appendix III HC-1963 Hand Pump Parts List.
2. Clamp suction (push on) hose and remove hose from pump.
3. Uncouple fittings of hydraulic hoses from pump.
4. Remove pump from jack.
5. Remove cotter pin from clevis pin.
6. Remove four (4) socket head cap screws.
7. Remove flanges.
8. Remove tube assembly.
9. Replace O-rings and backup ring. (See Appendix III for kits available.)
10. Re-assemble in reverse order.

### 9.4 JACK FUNCTION LOAD TEST

**NOTE: If function load testing is required:**

1. Take all necessary precautions to prevent injury.
2. Always jack against a load and **never** against the jack itself.
3. Do not exceed a test load equal to the jack rated capacity plus 10%.

### 9.5 PNEUMATIC PUMP

See Appendix II Haskel Air Pump Manufacturer Data for complete parts list and repair information.

## 10.0 TROUBLE SHOOTING

| TROUBLE  | PROBABLE CAUSE                                      | ACTION   |
|--|---|--|
| Fluid leakage at pump piston or pump body                    | Damaged backup ring, o-ring, piston or pump body    | Remove piston and pump body. Inspect for damage. Replace defective part(s). Replace removed o-ring and backup ring |
| External fluid leakage at rams                               | Damaged o-ring, backup ring or inner cylinder wall. | Remove rams as a unit from cylinder. Inspect parts. Replace o-ring and defective part(s)                           |
| Jack fails to lift rated load                                | Release valve not closed properly                   | Fully tighten release valve  |
|  | Low fluid level                                     | Fill to correct fluid level  |
|  | Pressure relief valve improperly adjusted           | Adjust or replace release valve  |
|  | Leakage at inlet or outlet check ball               | Inspect valve body for wear or replace valve body and check balls  |
|  | Vent screw closed                                   | Open vent screw  |
| Rams will not support load after manual or pneumatic pump up | Leaking ram o-ring seals                            | Check for external leakage, if present replace defective seal and back up ring                                     |
|  | Leaking pressure check valve                        | Inspect valve body for wear or replace valve body and check balls  |
|  | Leaking pressure relief valve                       | Remove release valve, inspect ball and ball seat in pump block. Replace effective part(s)                          |
| Rams raise and fall with each manual pump stroke             | Release valve open                                  | Fully tighten release valve  |
|  | Inlet check valve not seated or sticking            | Pump rapidly to dislodge or replace valve body   |
|  | Pressure check valve not seated or sticking         | Pump rapidly to dislodge or replace valve body   |
| Jack fails to lower  | Ram locknut not loosened                            | Raise jack ¼ inch and release locknut  |
|  | Vent screw closed                                   | Open vent screw  |
|  | O-Ring (pinched or rolled)                          | Replace o-ring and back-up ring, clean up cylinder wall of debris  |

## 11.0 PROVISION OF SPARES

Spare parts may be obtained from the manufacturer:

**TRONAIR, Inc.**  
1740 Eber Road  
Holland, Ohio 43528-9794 USA

Telephone: (419) 866-6301 or 800-426-6301  
Fax: (419) 867-0634  
E-mail: sales@tronair.com  
Website: www.tronair.com

## 12.0 IN-SERVICE SUPPORT

Contact Tronair for technical services and information.

## 13.0 GUARANTEES/LIMITATION OF LIABILITY

Tronair products are warranted to be free of manufacturing or material defects for a period of one year after shipment to the original customer. This is solely limited to the repair or replacement of defective components. This warranty does not cover the following items:

- a) Parts required for normal maintenance
- b) Parts covered by a component manufacturers warranty
- c) Replacement parts have a 90-day warranty from date of shipment

If you have a problem that may require service, contact Tronair immediately. Do not attempt to repair or disassemble a product without first contacting Tronair, any action may affect warranty coverage. When you contact Tronair be prepared to provide the following information:

- a) Product Model Number
- b) Product Serial Number
- c) Description of the problem

If warranty coverage is approved, either replacement parts will be sent or the product will have to be returned to Tronair for repairs. If the product is to be returned, a Return Material Authorization (RMA) number will be issued for reference purposes on any shipping documents. Failure to obtain a RMA in advance of returning an item will result in a service fee. A decision on the extent of warranty coverage on returned products is reserved pending inspection at Tronair. Any shipments to Tronair must be shipped freight prepaid. Freight costs on shipments to customers will be paid by Tronair on any warranty claims only. Any unauthorized modification of the Tronair products or use of the Tronair products in violation of cautions and warnings in any manual (including updates) or safety bulletins published or delivered by Tronair will immediately void any warranty, express or implied.


The obligations of Tronair expressly stated herein are in lieu of all other warranties or conditions expressed or implied. **Any unauthorized modification of the Tronair products or use of the Tronair products in violations of cautions and warnings in any manual (including updates) or safety bulletins published or delivered by Tronair will immediately void any warranty, express or implied and Tronair disclaims any and all liability for injury (WITHOUT LIMITATION and including DEATH), loss or damage arising from or relating to such misuse.**

## 14.0 APPENDICES

|              |   |
|--------------|---|
| APPENDIX I   | Hydraulic Schematic                                       |
| APPENDIX II  | Haskel Air Pump Manufacturer Data                         |
| APPENDIX III | HC-1963 Hand Pump Parts List                              |
| APPENDIX IV  | Declaration of Conformity                                 |
| APPENDIX V   | Material Safety Data Sheet – MIL-PRF-5606 Hydraulic Fluid |

## Parts List


When ordering Replacement Parts/Kits, please specify Model, Color and Serial Number of your Unit.

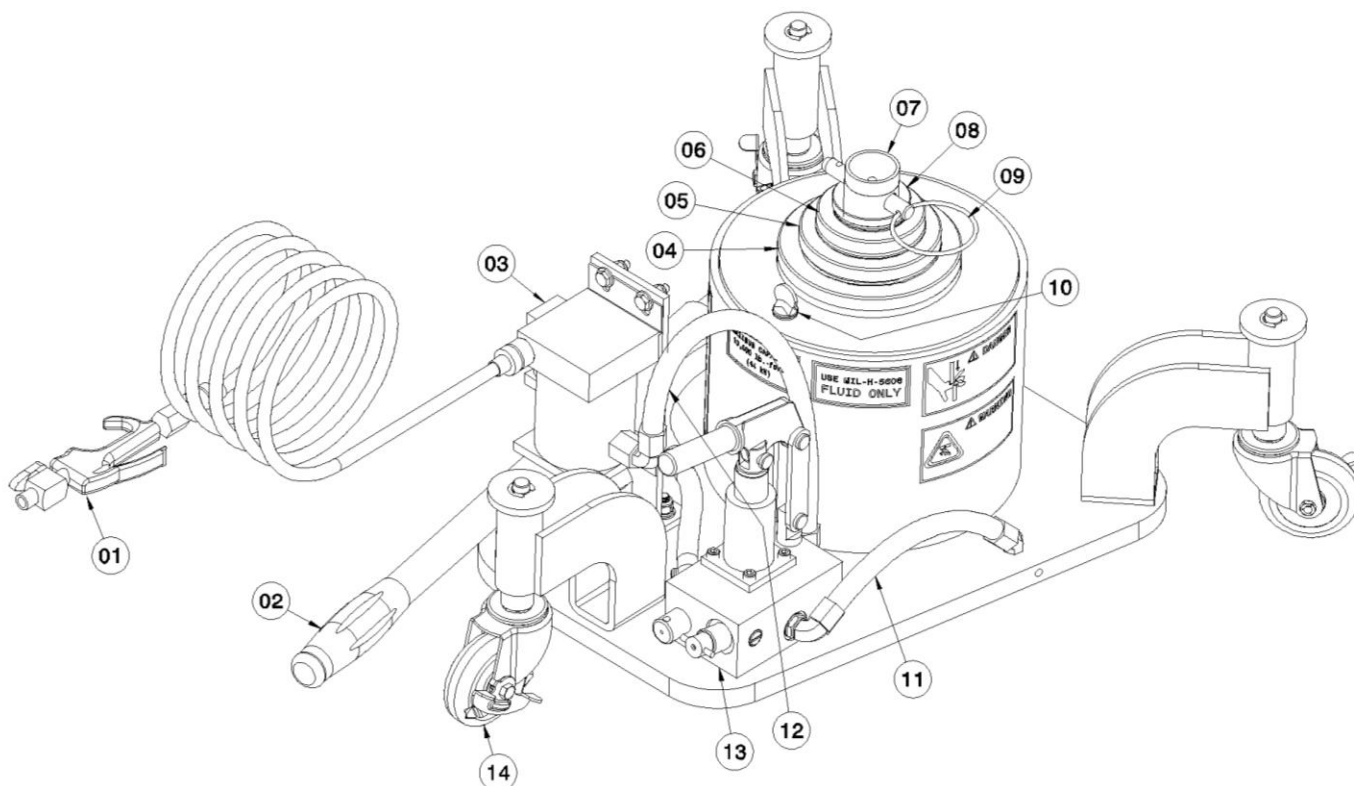

| Item | Part Number     | Description                      | Qty |
|------|-----------------|----------------------------------|-----|
| 1    | K-3333          | Assembly, Blowgun                | 1   |
| 2    | H-1009-01       | Assembly, Handle                 | 1   |
| 3    | Z-7154-01       | Air Pump                         | 1   |
| 4    | TR-2149         | Locknut, 1 <sup>st</sup> Stage   | 1   |
| 5    | TR-2148         | Locknut, 2 <sup>nd</sup> Stage   | 1   |
| 6    | TR-2147         | Locknut, 3 <sup>rd</sup> Stage   | 1   |
| 7    | R-1013-01       | Extension, Center                | 1   |
| 8    | TR-1036         | Ring, Ram Protection             | 1   |
| 9    | G-1318-0825     | Pin, ½" diameter x 2.5" long "D" | 1   |
| 10   | Z-1265          | Screw, Vent                      | 1   |
| 11   | TF-1043-06*12.0 | Assembly, Hose                   | 1   |
| 12   | TF-1043-06*18.0 | Assembly, Hose                   | 1   |
| 13   | HC-1963         | Hand Pump                        | 1   |
| 14   | U-1141          | Casters                          | 3   |

## Parts List


When ordering Replacement Parts/Kits, please specify Model, Color and Serial Number of your Unit.

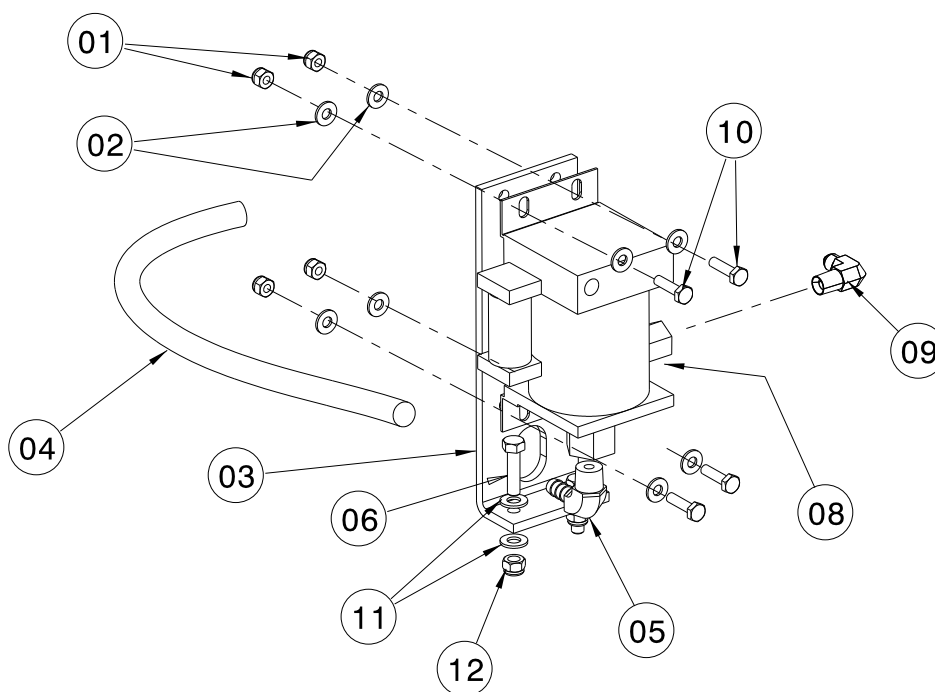

| Item      | Part Number     | Description                                 | Qty |
|-----------|-----------------|---|-----|
| 1         | G-1202-1055     | Stopnut, 1/4 - 28 Elastic                   | 4   |
| 2         | G-1250-1050N    | Flatwasher, 1/4 Narrow                      | 8   |
| 3         | J-3415-01       | Bracket, Air Pump Mounting                  | 1   |
| 4         | TF-1047-04*12.0 | Hose 3/8 Push-On 12" Long                   | 1   |
| 5         | N-2410-05       | Elbow, 90° Male 3/8 NPT, 3/8 Barbed Fitting | 1   |
| 6         | G-1100-106512   | Bolt HH, GR 5, 5/16 – 24 x 1 1/4 Long       | 2   |
| 8         | H-1174          | Pump, Air, Haskel                           | 1   |
| 9         | N-2005-08-S     | Elbow, 90° Male, 1/4 NPT, JIC 37° Fitting   | 1   |
| 10        | G-1100-105510   | Bolt HH, GR 5, 1/4 – 28 x Long              | 4   |
| 11        | G-1250-1060N    | Flatwasher, 5/16 Narrow                     | 4   |
| 12        | G-1202-1065     | Stopnut, 5/16 - 24 Elastic                  | 2   |
| Not Shown | TF-1043-06*12.0 | Assembly, Hose, 12" Long                    | 1   |
| Not Shown | K-1685          | Air Pump Seal Kit (Hydraulic)               | 1   |
| Not Shown | K-1686          | Air Pump Seal Kit (Pneumatic)               | 1   |

### Parts List

When ordering Replacement Parts/Kits, please specify Model, Color and Serial Number of your Unit.

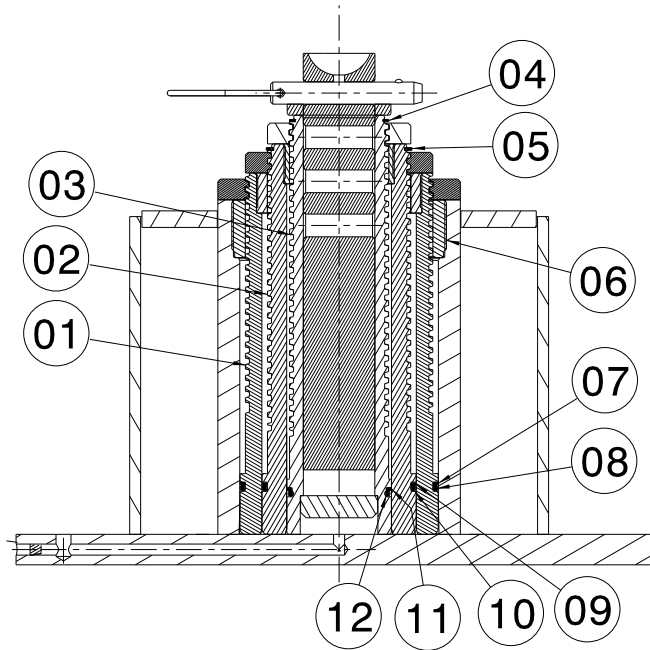

| Item | Part Number   | Description                                 | Qty |
|------|---------------|---|-----|
| 1    | Z-7282        | Ram, 1 <sup>st</sup> Stage                  | 1   |
| 2    | Z-7268        | Ram, 2 <sup>nd</sup> Stage                  | 1   |
| 3    | Z-7270        | Ram, 3 <sup>rd</sup> Stage                  | 1   |
| 4    | G-1397-206    | Ring, External Locknut Retaining            | 1   |
| 5    | G-1397-306    | Ring, External Locknut Retaining            | 1   |
| 6    | TR-2160       | Tube, Stop                                  | 1   |
| 7    | HC-2020-244   | Ring, Backup, 1 <sup>st</sup> Stage         | 1   |
| 8    | HC-2000-244   | O-Ring, Series 2, 1 <sup>st</sup> Stage     | 1   |
| 9    | HC-2020-236   | Ring, Backup, 2 <sup>nd</sup> Stage         | 1   |
| 10   | HC-2000-236   | O-Ring, Series 2, 2 <sup>nd</sup> Stage     | 1   |
| 11   | HC-2020-227   | Ring, Backup, 3 <sup>rd</sup> Stage         | 1   |
| 12   | HC-2000-227   | O-Ring, Series 2, 3 <sup>rd</sup> Stage     | 1   |
|      | <b>K-4463</b> | <b>Kit, Cylinder/Ram Seal; consists of:</b> |     |
| 7    | HC-2020-244   | Ring, Backup, 1 <sup>st</sup> Stage         | 1   |
| 8    | HC-2000-244   | O-Ring, Series 2, 1 <sup>st</sup> Stage     | 1   |
| 9    | HC-2020-236   | Ring, Backup, 2 <sup>nd</sup> Stage         | 1   |
| 10   | HC-2000-236   | O-Ring, Series 2, 2 <sup>nd</sup> Stage     | 1   |
| 11   | HC-2020-227   | Ring, Backup, 3 <sup>rd</sup> Stage         | 1   |
| 12   | HC-2000-227   | O-Ring, Series 2, 3 <sup>rd</sup> Stage     | 1   |






## **APPENDIX I**

### **Hydraulic Schematic**



# Hydraulic Schematic

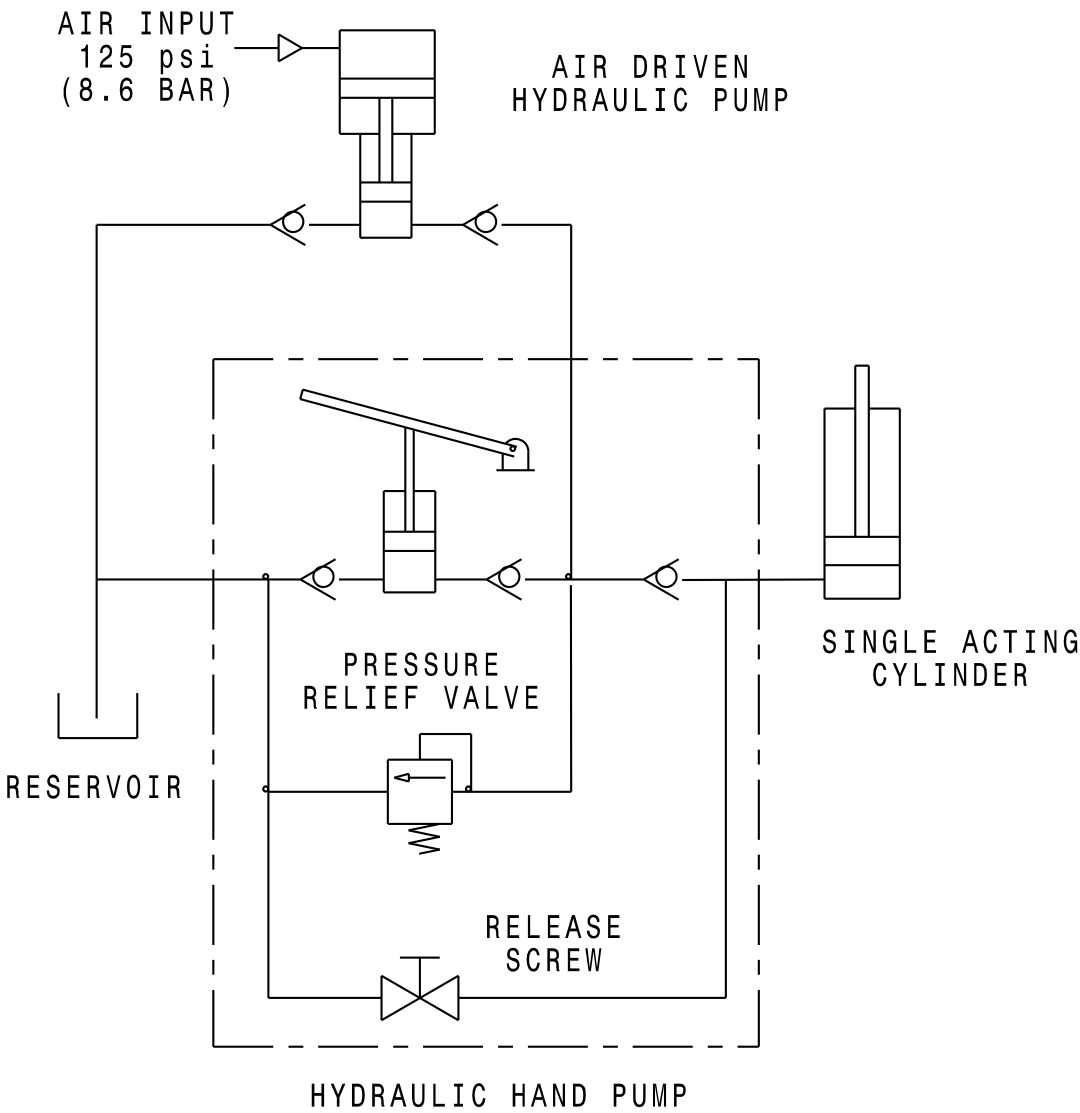





## **APPENDIX II**

### **Haskel Air Pump Manufacturer Data**

**\*\*\***

**Drawing 28550**





## PNEUMATIC DRIVEN LIQUID PUMPS

PERFORMANCE • QUALITY • RELIABILITY





## Welcome to Haskel

Haskel is an international organization offering a worldwide service through the Haskel group of companies and factory trained distributors. The Haskel group is headquartered in Burbank, California, with facilities throughout the world. We have built an enviable reputation for quality based on high pressure fluid and gas handling equipment.

In addition to offering a comprehensive range of pneumatic driven liquid pumps, air amplifiers, pneumatic and hydraulic driven gas boosters, high pressure valves, fittings and accessories, we custom design and build power pacs and test rigs. Our continued investment in technology ensures that Haskel will stay at the leading edge of high pressure technology.

This brochure introduces our pneumatic driven liquid pump range. Technical details and advice on any of the products shown is available on request.

We are here to solve your problems. Just give us a call at 818-843-4000 or visit our website at [www.haskel.com](http://www.haskel.com) for more information or to locate a distributor.

## Why Use Haskel Pneumatic Driven Pumps?

*Our pumps offer many advantages over electrically driven pumps:*

- Safe pneumatic operation – no heat, flame or spark risk
- Up to 100000 psi (7000 bar) capability
- Infinitely variable cycling speed
- Stall feature at pre-determined pressure to hold that pressure without consuming power
- Problem-free stop/start applications
- Easily automated – many modification and control options
- Suitable for most liquids and liquefied gases
- Alternative gas drive options – sour gas, natural gas, boil off gases, nitrogen
- No need for air line lubrication – saves costs and prevents contamination
- Robust, reliable, compact and easy to maintain proven design
- Unbalanced cycling spool provides immediate response to pressure changes
- Also available in standard, or custom built power pac configurations
- Excellent worldwide service for spares and repairs
- Can be manufactured to meet API 675, ATEX, CE and NACE

## Applications include:

- Pressure testing
- Work holding/power clamping
- Jacking/lifting
- Valve actuator control
- Hydraulic cylinder actuation
- Press safety overload devices
- Roller tensioning
- Metering
- Precision lubrication and spraying
- Liquefied gas transfer



## Pressure and Flow on Demand

This guide will help you to pre-select the pump ideally suited for your application. If you have specific questions, however, we urge you to provide us with details of the duties you require from the pump, available air/gas drive pressure, and pressure/flow requirements, and we will recommend a model and any corresponding accessories.

## Output Horsepower Ratings

The pumps are categorized on their horsepower ratings (see pages 6-7). These are approximate and peak at 100 psi (7 bar), assuming adequate drive air, pressure and volume. Peak horsepower is at about 75% nominal ratio x air drive pressure, i.e. 100:1 pump @ 100 psi air drive peaks at  $100 \times 100 = 10000 \times 0.75$  psi = 7500 psi (517 bar) hydraulic pressure.

## Operation

The pumps automatically reciprocate on a differential piston principle. A large piston driven by relatively low pressure drive acts directly upon a smaller hydraulic piston.

The nominal ratio between piston sizes is indicated in the model coding and approximates to the maximum working pressure. The actual ratio is about 15% above nominal so that the pump continues to cycle when drive pressure equals nominal ratio. Initially, the pump will cycle at maximum speed acting as a transfer pump to pressurize downstream.


It will cycle at a slower rate as the fluid meets resistance until it stalls at maximum output pressure. When a pressure drop downstream occurs, it will recycle as necessary in an effort to maintain maximum pressure. Stall pressure is achieved when the outlet pressure rises and offers more resistance to the reciprocating differential piston assembly. The piston assembly then stalls when the forces balance, e.g. when drive pressure x drive piston area equals outlet (stall) pressure x driven hydraulic plunger area. The pump design is sensitive to very small pressure drops due to the low frictional resistance of the large diameter drive piston and hydraulic piston seals.

## Double and Triple Air Head Pumps


Performance can be extended by stacking air pistons without changing the hydraulic piston. Haskel multi-head pumps consume less air than competitive single head pumps of the same area, as only one head is pressurized on the return stroke; e.g., on a 1.5 hp pump additional heads can raise performance to 2 hp.

Double air head pumps are identified by the last digit 2 in the pump model number. Thus, a nominal 50:1 ratio pump with two air heads is described as a 52. Similarly, a triple air head pump is identified with a last digit 3. Thus, a 900 ratio pump with three air heads is described as a 903.


### Single Drive Head Pump

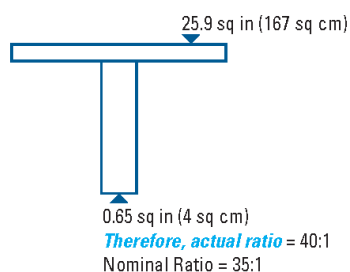

### Double Air Head Pump

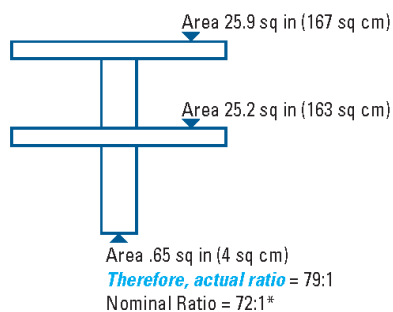

### Triple Air Head Pump

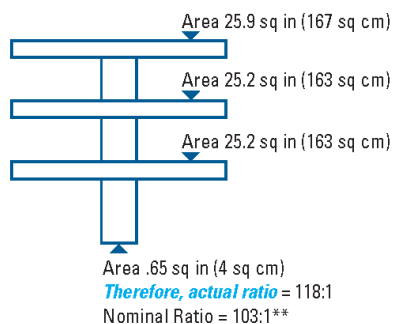


#### Nominal Ratio


\* (2) Indicates Double Drive Piston

\*\* (3) Indicates Triple Drive Piston


1. Drive Section

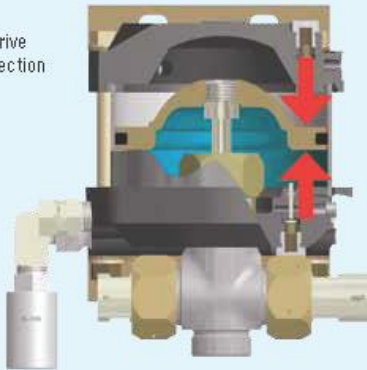


2. Hydraulic Check Valves

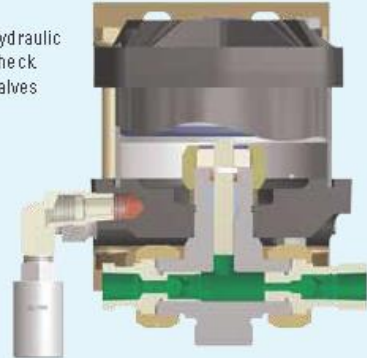

3. Drive Cycling Valve

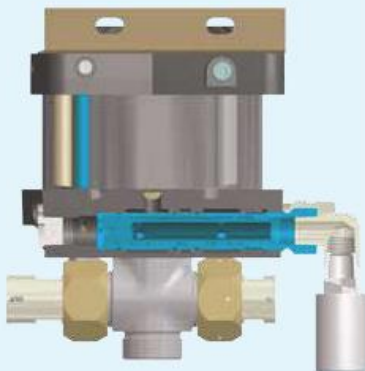

4. Hydraulic Seal/Check Valve

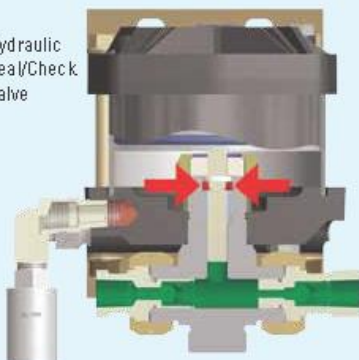

## Anatomy of a Pneumatic Driven Pump

### 1. Drive Section

The piston, complete with "O" ring seal, operates in an epoxy filled, fiberglass wound barrel, the diameter of which is constant throughout a given series of pumps. Drive media forces the piston down on the compression stroke and raises it on the suction stroke (M series have a spring return). The piston is pre-lubricated during assembly and therefore no air line lubricator is necessary.

### 2. Hydraulic Section/Check Valves

This is directly linked to the drive piston by the hydraulic piston, the bottom portion of which is in the hydraulic body. Outlet flow and pressure are determined by the area of the hydraulic piston head, its nominal ratio with the drive piston head, and drive pressure. On the down stroke, liquid in the hydraulic section is forced under compression through the outlet check valve. Fresh liquid is induced via the inlet check valve on the return stroke. These check valves control the flow of liquid through the hydraulic section. They are spring-loaded and have a very low cracking pressure, allowing maximum opening on the induction stroke. The pressure of hydraulic fluid on the down stroke closes the inlet check valve and acts against the spring to open the outlet check valve.

### 3. Drive Cycling Valve

This is a pilot-operated, unbalanced, lightweight spool, which directs drive pressure, first to the top of the drive piston, and then to the underside to reciprocate the piston (cycle). It actuates via pilot valves at the top and the bottom of the stroke, which causes the unbalanced spool to shift and reciprocate the piston.

### 4. Hydraulic Seal/Check Valves

This is one of the few wear parts. Its function is to allow the hydraulic piston to reciprocate without passing fluid into the drive section. The liquid, its pressure and its temperature determine seal specification. A distance piece can be incorporated between drive and hydraulic sections for complete contamination-free operation on most Haskel pumps.



## Pump Selection Information

All Haskel pumps are identified by letters coding the type of pump, followed by a number indicating the practical working ratio

of the drive area to the hydraulic plunger area. These letters are explained in the chart below.

### Pump Model Letter Coding

|                   |   |
|-------------------|---|
| <b>M</b>          | .875" stroke .33 hp miniature pump series                     |
| <b>S</b>          | Stainless steel hydraulic piston and body                     |
| <b>29723</b>      | .33 hp Chemical Pump  |
| <b>D (Prefix)</b> | Pump incorporates a Distance Piece                            |
| <b>D (Suffix)</b> | Double Acting pump  |
| <b>4B</b>         | 1" stroke .75 hp pump series (bottom inlet only)              |
| <b>A</b>          | 2" stroke 1.5 + 2 hp pump series                              |
| <b>H</b>          | 2" stroke 1.5 + 2 hp High Pressure pump series                |
| <b>-C</b>         | Filter, regulator with gauge and shut-off/speed control valve |

|            |   |
|------------|---|
| <b>XH</b>  | 2" stroke 1.5 + 2 hp Extreme High Pressure pump series        |
| <b>G</b>   | 4.5" stroke 6 hp pump series                                  |
| <b>8</b>   | 4.5" stroke 8 hp pump or booster series                       |
| <b>14</b>  | 4" stroke 10 hp pump series                                   |
| <b>W</b>   | Polyurethane U-cup dynamic seal                               |
| <b>F</b>   | UHMWPE (Ultra-high Molecular Weight Polyethylene Dynamic Seal |
| <b>T</b>   | Reinforced teflon dynamic seal                                |
| <b>V</b>   | Viton o-ring static seal                                      |
| <b>-B</b>  | Bottom inlet  |
| <b>-CP</b> | Chemical Pump   |

### Quick Model Comparison Chart

The chart to the right shows the pressure/flow capability of each pump in the range. The diagonal lines show constant output horsepower for each series. The model ratios are circled.

#### Example


The pressure required is 2175 psi (150 bar). The flow required is 215 cubic inches (3.52 liters) per minute. The black dot plots position. Only models on diagonals to the right of the dot will meet the demand; e.g., the -35 ratio 1.5 hp pump, assuming a supply at 100 psi (7 bar) and 70 scfm (119m<sup>3</sup>/hr) can be met; if not, a -32 or -52 2 hp pump would be needed.

**Note:** For specific performance curves, refer to *Liquid Pump Rapid Reference Guide*.

The diagonal horsepower lines in the chart below are based on 100 psi (7 bar) drive pressure. Drive flow requirement is different for each series as follows:

|               |                                   |
|---------------|-----------------------------------|
| <b>.33 hp</b> | 15 scfm (25 m <sup>3</sup> /hr)   |
| <b>.75 hp</b> | 45 scfm (76 m <sup>3</sup> /hr)   |
| <b>1.5 hp</b> | 70 scfm (119 m <sup>3</sup> /hr)  |
| <b>2 hp</b>   | 85 scfm (144 m <sup>3</sup> /hr)  |
| <b>3 hp</b>   | 85 scfm (144 m <sup>3</sup> /hr)  |
| <b>6 hp</b>   | 175 scfm (297 m <sup>3</sup> /hr) |
| <b>8 hp</b>   | 225 scfm (382 m <sup>3</sup> /hr) |
| <b>10 hp</b>  | 270 scfm (459 m <sup>3</sup> /hr) |

Reduced air drive flow or pressure will result in a corresponding reduction in output horsepower. This chart can be used to select pump series and model ratio.

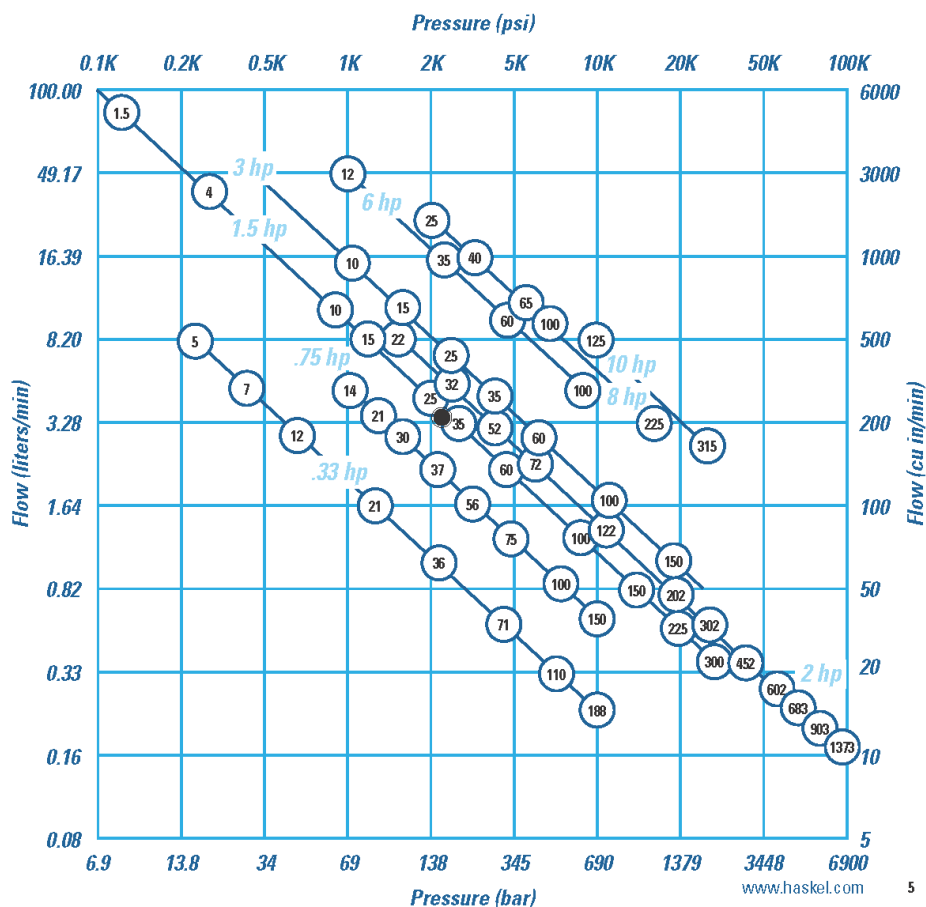

## Performance and Specification Overview

| Max Drive<br>Drive Head<br>HP | Pump Model Code                | Nominal<br>Ratio    | Actual<br>Ratio | Mainimum Rated Output Pressure |       |              |       | Displacement/Cycle |      | Maximum Flow |       |      |    |
|-------------------------------|--------------------------------|---------------------|-----------------|--------------------------------|-------|--------------|-------|--------------------|------|--------------|-------|------|----|
|                               |                                |                     |                 | Continuous                     |       | Intermittent |       |                    |      |              |       |      |    |
|                               |                                |                     |                 | psi                            | bar   | psi          | bar   | cu in              | ml   | cu in/min    | l/min |      |    |
| 125 psi/8.6 bar               | M, MDSTV                       | -5                  | 5.6             | 625                            | 43    | 625          | 43    | 0.83               | 13.6 | 506          | 8.30  |      |    |
|                               | M, MS                          | -7                  | 7.8             | 900                            | 62    | 900          | 62    | 0.60               | 9.8  | 366          | 6.00  |      |    |
|                               |                                | -12                 | 14              | 1500                           | 103   | 1500         | 103   | 0.36               | 5.9  | 234          | 3.83  |      |    |
|                               | M, MS, 29723                   | -21                 | 25              | 2600                           | 179   | 2600         | 179   | 0.20               | 3.3  | 130          | 2.13  |      |    |
|                               |                                | -36                 | 41              | 4500                           | 310   | 4500         | 310   | 0.12               | 2.0  | 78           | 1.28  |      |    |
|                               |                                | -71                 | 82              | 8800                           | 607   | 8800         | 607   | 0.060              | 1.0  | 39           | 0.64  |      |    |
|                               |                                | -110                | 126             | 13500                          | 931   | 13500        | 931   | 0.039              | 0.6  | 25           | 0.42  |      |    |
|                               | M, MS                          | -188                | 217             | 15000                          | 1034  | 15000        | 1034  | 0.023              | 0.4  | 18           | 0.29  |      |    |
| MS                            | -220                           | 237                 | 20000           | 1380                           | 25000 | 1723         | 0.021 | 0.344              | 14   | 0.22         |       |      |    |
| 100 psi/7 bar                 | 4B                             | -14                 | 16              | 1500                           | 103   | 1500         | 103   | 0.90               | 14.7 | 428          | 7.01  |      |    |
|                               |                                | -21                 | 24              | 2300                           | 159   | 2300         | 159   | 0.60               | 9.8  | 285          | 4.67  |      |    |
|                               |                                | -25                 | 29              | 2700                           | 186   | 2700         | 186   | 0.50               | 8.2  | 238          | 3.89  |      |    |
|                               |                                | -30                 | 34              | 3200                           | 221   | 3200         | 221   | 0.43               | 7.0  | 204          | 3.35  |      |    |
|                               |                                | -37                 | 42              | 3800                           | 262   | 3800         | 262   | 0.35               | 5.7  | 166          | 2.72  |      |    |
|                               |                                | -55                 | 63              | 6000                           | 414   | 6000         | 414   | 0.22               | 3.6  | 105          | 1.71  |      |    |
|                               |                                | -75                 | 86              | 7800                           | 538   | 7800         | 538   | 0.17               | 2.8  | 81           | 1.32  |      |    |
|                               |                                | -100                | 114             | 10600                          | 731   | 10600        | 731   | 0.13               | 2.0  | 62           | 1.01  |      |    |
| -150                          | 171                            | 15000               | 1034            | 15000                          | 1034  | 0.088        | 1.44  | 42                 | 0.68 |              |       |      |    |
| 150 psi/10.5 bar              | DSTV                           | -1.5                | 1.6             | 120                            | 8     | 160          | 11    | 31.90              | 513  | 5104         | 83.6  |      |    |
|                               | ATV, DTV                       | -4                  | 80              | 690                            | 48    | 1200         | 83    | 20.00              | 328  | 3200         | 52.4  |      |    |
|                               | AW, ASF, DF, DSF, DSTV         | -B10                | 11.5            | 1600                           | 110   | 1600         | 110   | 4.05               | 66.4 | 1215         | 19.9  |      |    |
|                               |                                | -B15                | 17              | 2400                           | 165   | 2400         | 165   | 2.70               | 44.3 | 810          | 13.3  |      |    |
|                               |                                | -25                 | 29              | 4000                           | 276   | 4000         | 276   | 1.62               | 26.6 | 486          | 8.0   |      |    |
|                               |                                | -35                 | 40              | 5700                           | 393   | 5700         | 393   | 1.16               | 19.0 | 348          | 5.7   |      |    |
|                               |                                | -60                 | 69              | 9800                           | 676   | 9800         | 676   | 0.67               | 11.0 | 201          | 3.3   |      |    |
|                               |                                | -100                | 115             | 15000                          | 1034  | 16500        | 1138  | 0.41               | 6.7  | 123          | 2.0   |      |    |
|                               |                                | -150                | 173             | 15000                          | 1034  | 20000        | 1380  | 0.27               | 4.5  | 81           | 1.3   |      |    |
|                               | HF, HSF, DHF, DSHF             | -151                | 173             | 25000                          | 1724  | 25000        | 1724  | 0.27               | 4.5  | 81           | 1.3   |      |    |
|                               |                                | -225                | 260             | 30000                          | 2069  | 37000        | 2551  | 0.18               | 3.0  | 41           | 0.7   |      |    |
|                               | -300                           | 345                 | 30000           | 2069                           | 50000 | 3448         | 0.14  | 2.3                | 32   | 0.5          |       |      |    |
| HF                            | -450                           | 533                 | 25000           | 1724                           | 45000 | 3403         | 0.091 | 1.5                | 20   | 0.3          |       |      |    |
| Double<br>2 hp                | AW, ASF, DF, DSF, DSTV         | -B22                | 23              | 3200                           | 221   | 3200         | 221   | 4.05               | 66.4 | 1215         | 19.9  |      |    |
|                               |                                | -B32                | 34              | 4800                           | 331   | 4800         | 331   | 2.70               | 44.3 | 810          | 13.3  |      |    |
|                               |                                | -52                 | 57              | 5000                           | 345   | 8000         | 552   | 1.62               | 26.6 | 486          | 8.0   |      |    |
|                               |                                | -72                 | 80              | 11000                          | 758   | 11000        | 758   | 1.16               | 19.0 | 348          | 5.7   |      |    |
|                               |                                | -122                | 138             | 15000                          | 1034  | 19000        | 1310  | 0.67               | 11.0 | 201          | 3.3   |      |    |
|                               | HF, HSF, DHF, DSHF             | -202                | 230             | 30000                          | 2069  | 33000        | 2275  | 0.41               | 6.7  | 92           | 1.5   |      |    |
|                               |                                | -302                | 346             | 30000                          | 2069  | 50000        | 3448  | 0.27               | 4.5  | 61           | 1.0   |      |    |
|                               | DXHF, DSXHF                    | -452                | 520             | 30000                          | 2069  | 70000        | 4827  | 0.18               | 3.0  | 41           | 0.7   |      |    |
| -602                          | 690                            | 30000               | 2069            | 75000                          | 5171  | 0.14         | 2.3   | 32                 | 0.5  |              |       |      |    |
| Triple<br>2 hp                | DXHF, DSXHF                    | -683                | 780             | 30000                          | 2069  | 70000        | 4827  | 0.18               | 3.0  | 25           | 0.41  |      |    |
|                               |                                | -903                | 1038            | 30000                          | 2069  | 75000        | 5171  | 0.14               | 2.3  | 20           | 0.33  |      |    |
|                               | DSXHW                          | -1373               | 1575            | 30000                          | 2069  | 100000       | 6895  | 0.086              | 1.4  | 12           | 0.197 |      |    |
| 2.2                           | AFD, DFD, ASFD, DSFD           |                     | -B60            | 69                             | 6500  | 448          | 6500  | 448                | 1.34 | 2.2          | 369   | 6.0  |    |
|                               | 150 psi/10.5 bar               | ASFD                | -10             | 11.5                           | 1600  | 110          | 1600  | 110                | 8.10 | 133          | 1823  | 29.9 |    |
| -15                           |                                |                     | 17              | 2400                           | 165   | 2400         | 165   | 5.40               | 89   | 1215         | 19.9  |      |    |
| -25                           |                                |                     | 29              | 4000                           | 276   | 4000         | 276   | 3.24               | 53.2 | 729          | 11.9  |      |    |
| -35                           |                                |                     | 40              | 5700                           | 393   | 5700         | 393   | 2.32               | 38.0 | 522          | 8.6   |      |    |
| -60                           |                                |                     | 69              | 9800                           | 676   | 9800         | 676   | 1.34               | 22.0 | 302          | 4.9   |      |    |
| -100                          |                                |                     | 115             | 15000                          | 1034  | 16500        | 1138  | 0.82               | 13.4 | 185          | 3.0   |      |    |
| -150                          |                                |                     | 173             | 15000                          | 1034  | 20000        | 1380  | 0.54               | 9.0  | 122          | 2.0   |      |    |
| -202                          |                                |                     | 230             | 30000                          | 2069  | 33000        | 2275  | 0.82               | 13.4 | 144          | 2.4   |      |    |
| Single<br>6 hp                | GWD, GSFD, DGFD, DGSFD, DGSTVD |                     | -12             | 14.8                           | 1850  | 128          | 4000  | 276                | 15.9 | 260          | 5009  | 82.1 |    |
|                               | GW, DGF, GSF, DGSE, DGSTV      | -35                 | 40.3            | 4375                           | 302   | 4375         | 302   | 6.0                | 98   | 1890         | 31.0  |      |    |
|                               |                                | -60                 | 69              | 7500                           | 517   | 7500         | 517   | 3.5                | 57   | 1103         | 18.1  |      |    |
|                               |                                | -100                | 115             | 8000                           | 552   | 10000        | 690   | 2.1                | 34   | 662          | 10.8  |      |    |
|                               | 8 hp                           | 8SFD, 8DSFD, 8DSTVD |                 | -25                            | 27.5  | 3575         | 246   | 4000               | 276  | 14.0         | 229   | 2660 | 44 |
|                               |                                | 8SFD                | -40             | 43.5                           | 6000  | 414          | 6000  | 414                | 8.90 | 145          | 1691  | 28   |    |
|                               |                                |                     | -65             | 73                             | 10000 | 690          | 10000 | 680                | 5.40 | 88           | 1026  | 17   |    |
|                               |                                | 8DSFD               | -100            | 112                            | 10000 | 690          | 10000 | 680                | 3.52 | 57.5         | 669   | 11   |    |
| 8HSFD                         |                                | -225                | 253             | 22500                          | 1530  | 22500        | 1530  | 1.56               | 25.5 | 296          | 5     |      |    |
| 10 hp                         | D14STD, D14SFD                 |                     | -125            | 138                            | 16000 | 1103         | 16000 | 1103               | 8.80 | 144          | 704   | 11.5 |    |
|                               | -315                           | 347                 | 36000           | 2482                           | 36000 | 2482         | 3.50  | 57.4               | 280  | 4.6          |       |      |    |

| Typical Performance Based on 100 psi (7 bar) Pressure and Drive Flow Data on Page 5 |      |             |       |                 |      |             |       |
|---|------|-------------|-------|-----------------|------|-------------|-------|
| Outlet Pressure   |      | Outlet Flow |       | Outlet Pressure |      | Outlet Flow |       |
| psi   | bar  | cu in/min   | l/min | psi             | bar  | cu in/min   | l/min |
| 225   | 15.5 | 500         | 8.20  | 415             | 29   | 249         | 4.09  |
| 300   | 21   | 350         | 5.70  | 600             | 41   | 160         | 2.60  |
| 700   | 48   | 200         | 3.28  | 1125            | 78   | 100         | 1.64  |
| 1500  | 103  | 90          | 1.48  | 2000            | 138  | 48.9        | 0.80  |
| 1700  | 117  | 70          | 1.15  | 3100            | 214  | 39.6        | 0.65  |
| 3000  | 207  | 39          | 0.64  | 6000            | 414  | 19          | 0.31  |
| 7500  | 517  | 20          | 0.33  | 8500            | 586  | 17          | 0.28  |
| 9000  | 345  | 18          | 0.30  | 10000           | 690  | 14          | 0.23  |
| 7500  | 517  | 14          | 0.23  | 15000           | 1034 | 12          | 0.20  |
| 700   | 48   | 400         | 6.55  | 1450            | 100  | 61          | 1     |
| 1000  | 69   | 270         | 4.42  | 2000            | 138  | 120         | 2     |
| 1250  | 86   | 230         | 3.77  | 2500            | 172  | 61          | 1     |
| 1500  | 1034 | 200         | 3.28  | 3000            | 207  | 62          | 1     |
| 1750  | 121  | 170         | 2.78  | 3500            | 241  | 82          | 1.33  |
| 2000  | 138  | 110         | 1.8   | 5000            | 345  | 66          | 1.08  |
| 2500  | 172  | 87          | 1.42  | 7500            | 517  | 37          | 0.6   |
| 5000  | 345  | 57          | 0.93  | 10000           | 690  | 26          | 0.43  |
| 7500  | 517  | 37          | 0.6   | 15000           | 1034 | 7           | 0.11  |
| 50  | 3    | 5000        | 81.9  | 150             | 10.3 | 1000        | 16.4  |
| 100   | 7    | 1953        | 32    | 400             | 28   | 750         | 12.3  |
| 400   | 28   | 1000        | 16.4  | 990             | 68   | 500         | 8.19  |
| 750   | 52   | 598         | 9.8   | 1600            | 110  | 200         | 3.28  |
| 1000  | 69   | 403         | 6.6   | 2500            | 172  | 195         | 3.2   |
| 2000  | 138  | 350         | 4.1   | 3600            | 248  | 98          | 1.6   |
| 3000  | 207  | 152         | 2.5   | 6200            | 427  | 50          | 0.82  |
| 4000  | 276  | 100         | 1.64  | 10000           | 690  | 24.4        | 0.4   |
| 7000  | 483  | 59.7        | 0.98  | 15000           | 1034 | 29.9        | 0.49  |
| 7000  | 483  | 59.7        | 0.98  | 15000           | 1034 | 29.9        | 0.49  |
| 7500  | 517  | 39.6        | 0.65  | 24000           | 1655 | 9.8         | 0.16  |
| 15000   | 1034 | 29.9        | 0.49  | 27000           | 1862 | 20.1        | 0.33  |
| 36000   | 2483 | 14.6        | 0.24  | 45000           | 3103 | 9.2         | 0.15  |
| 400   | 28   | 799         | 13.1  | 2100            | 145  | 200         | 3.28  |
| 700   | 48   | 500         | 8.2   | 3000            | 207  | 152         | 2.5   |
| 1900  | 131  | 299         | 4.9   | 5000            | 345  | 97.6        | 1.6   |
| 2000  | 138  | 226         | 3.7   | 7500            | 517  | 50          | 0.82  |
| 4000  | 276  | 122         | 2     | 12000           | 828  | 40.2        | 0.66  |
| 7000  | 483  | 91.5        | 1.5   | 20000           | 1379 | 20.1        | 0.33  |
| 10000   | 690  | 45.2        | 0.74  | 30000           | 2069 | 15.2        | 0.25  |
| 10000   | 690  | 34.8        | 0.57  | 40000           | 2759 | 15.2        | 0.25  |
| 15000   | 1034 | 24.4        | 0.4   | 50000           | 3448 | 12.2        | 0.2   |
| 15000   | 1034 | 19.5        | 0.32  | 60000           | 4138 | 4.9         | 0.08  |
| 15000   | 1034 | 15.9        | 0.26  | 70000           | 4828 | 5.5         | 0.09  |
| 16000   | 1103 | 9.2         | 0.15  | 90000           | 6207 | 3.1         | 0.05  |
| 1000  | 69   | 348         | 5.7   | 5500            | 379  | 152         | 2.5   |
| 500   | 34   | 1520        | 24.9  | 1000            | 69   | 380         | 6.22  |
| 750   | 52   | 1030        | 16.88 | 1500            | 103  | 260         | 4.26  |
| 1000  | 69   | 662         | 10.85 | 2500            | 172  | 162         | 2.66  |
| 1500  | 1034 | 465         | 7.62  | 3500            | 248  | 100         | 1.64  |
| 3000  | 138  | 248         | 4.07  | 6000            | 414  | 56          | 0.92  |
| 5000  | 345  | 151         | 2.48  | 10000           | 690  | 41          | 0.67  |
| 7500  | 517  | 103         | 2     | 15000           | 1034 | 27          | 0.44  |
| 10000   | 690  | 63          | 1.03  | 20000           | 1379 | 47          | 0.77  |
| 200   | 14   | 5004        | 82    | 1200            | 83   | 1454        | 24    |
| 1000  | 69   | 1770        | 29    | 3500            | 241  | 600         | 9.8   |
| 2000  | 138  | 976         | 16    | 5500            | 379  | 397         | 6.5   |
| 2000  | 138  | 573         | 9.4   | 10000           | 690  | 195         | 3.2   |
| 1000  | 69   | 2400        | 39.3  | 2500            | 172  | 280         | 4.6   |
| 2000  | 138  | 1420        | 23.2  | 4000            | 276  | 200         | 3.27  |
| 3000  | 207  | 880         | 14.4  | 6000            | 414  | 310         | 5.08  |
| 5000  | 345  | 555         | 9.1   | 10000           | 690  | 163         | 2.67  |
| 10000   | 690  | 270         | 4.4   | 20000           | 1379 | 144         | 2.36  |
| 8000  | 552  | 488         | 8.0   | 12000           | 828  | 195         | 3.2   |
| 15000   | 1034 | 238         | 3.9   | 30000           | 2069 | 79.3        | 1.3   |



## Guidelines for Continuous Duty Applications for Maximizing Seal Life Performance

| Pump Series   | Maximum Cycles per Minute |
|---|---------------------------|
| 0.3 hp  | 325 cpm                   |
| 0.75 hp   | 225 cpm                   |
| 1.5, 2.0 and 2.2 hp<br>(Single and Double Drive Piston) | 80 cpm                    |
| 2.0 hp (Triple Drive Piston)                            | 60 cpm                    |
| 3.0 hp  | 80 cpm                    |
| 6.0 hp  | 60 cpm                    |
| 8.0 hp  | 50 cpm                    |
| 10.0 hp   | 40 cpm                    |

## .33 hp (.25 kW) M Series Pump Models



### Key Features

- Choice of 5 models, 9 ratios, 27 possible combinations
- Flows to 2 gpm (7.5 l/min)
- Choice of wetted materials
- Single air head
- Drive pressure 25 to 125 psi (1.8 to 9 bar)
- Pressures to 25000 psi (1724 bar)
- All Hydraulic fluids, water (plain or DI), solvents, mild chemicals, liquefied gases

### Optional Modifications

| Number               | Description   |
|----------------------|---|
| -HP                  | Hand pump attachment (with handle). Provides manual operation of pump for precision pressure control or use without air power.  |
| 26082                | Handle only.  |
| 26220-2              | With handle.  |
| 26220-3              | Without handle.   |
|                      | Kits for converting existing units.   |
| -V                   | Manual release with relief valve. For M and MS pumps only. Provides high pressure needle valve with internal adjustable safety relief downstream of pump outlet checks. Tank return is 1/2" NPT in pump body. |
| 26063-3              | Dead Man valve, 1/4" NPT port.  |
| 26064-3              | Combination air regulator/filter with gauge, 1/4" NPT port.   |
| 26065-3              | Speed control valve, 1/4" NPT port.   |
| 26065-3 plus 26064-3 | -C air controls installed on pump, 1/4" NPT port.   |
| 28320                | Manifold mount inlet port. Provides O-ring boss in aluminum block to enable mounting on side of tank below oil level. Modification applies to M-21 through M-188 only.  |
| 28590                | Palm or foot start/stop button drive. Spring loaded shut.   |
| 28700-1              | Air OP release valve.   |
| 28826                | Remote start/stop control. Provides 1/2" NPT bleed signal port for single line remote control.  |
| 29002                | Viton air drive.  |
| 29697                | Single stroke from remote air pulse. Useful for metering applications. One stroke per air pulse signal; eliminates automatic cycling. 1/2" NPT signal port.   |
| 51331                | EPR seals for liquid section for 29723-10X ratio pumps.   |
| 51788                | Piped exhaust—standard. Provides connection ports for drive and pilot exhausts. Enables under tank top mounting and for natural gas drive.  |
| 51794                | Piped exhaust—sour gas. With hand pump (HP).  |
| 51794-2              | Piped exhaust—sour gas. Without hand pump (HP).   |
| 51804                | Muffler (for use with piped exhaust modifications below). 1/2" NPT male port.   |

| Model                                      | Nominal Ratio | Maximum Working Pressure | Displacement per Cycle |
|--|---------------|--------------------------|------------------------|
| M, MDSTV                                   | -5            | 625 psi (43 bar)         | .83 cu in (13.6 ml)    |
| M, MS <sup>21</sup>                        | -7            | 900 psi (62 bar)         | .6 cu in (9.8 ml)      |
|  | -12           | 1500 psi (103 bar)       | .36 cu in (5.9 ml)     |
| M, MS <sup>21</sup> , 29723 <sup>10X</sup> | -21           | 2600 psi (179 bar)       | .2 cu in (3.3 ml)      |
|  | -36           | 4500 psi (310 bar)       | .12 cu in (2.0 ml)     |
|  | -71           | 8900 psi (607 bar)       | .06 cu in (1.0 ml)     |
|  | -110          | 13500 psi (931 bar)      | .039 cu in (0.6 ml)    |
|  | -188          | 15000 psi (1034 bar)     | .023 cu in (.4 ml)     |
| MS   | -220          | 25000 psi (1723 bar)     | .021 cu in (.34 ml)    |

<sup>10X</sup> Not available in 188 ratio

(3) Maximum intermittent pressure for stainless steel in the MS and 29723 is 10000 psig (690 bar).

For service codes, see page 17.

For weights and dimensions, see page 18.

| Number  | Description   |
|---------|---|
| 51809   | Normally open air operated release with relief valve. Provides highest release flow capacity. Will hold full pump psi piloted from drive air. Vents are not threaded. Ref. drawing 56643 for tank top mounting parts.                         |
| 51809-1 | Normally closed air operated release with relief valve. Used to hold hydraulic jacks. Will release up to 11000 psi (using 100 psi air). Vents are not threaded. Ref. drawing 56643 for tank top mounting parts. Not available in 188:1 ratio. |
| 51810   | Safety relief valve. Relief is upstream of outlet check. Vent hole 1/16" NPT M or MS series -21 through 188.  |
| 51811   | External air pilot. Provides 1/2" NPT port for external air to pilot for remote start/stop.   |
| 52340   | Solid air cap.  |
| 52980   | Electric stroke counter provision. Micro switch (BZE6-2RQ) mounted on upper cap trips with each cycle.  |
| 53175   | Level II cleaning.  |
| 53304   | High pressure outlet port. Fits 1/4" O.D. high pressure threaded and coned tube.  |
| 53784   | Piped exhaust (drive only). For field conversion of any .33 HP pump. Provides 1/2" NPT exhaust port.  |
| 53935   | Low temperature drive. Enables operation down to 5°F. Some sacrifice of seal life at normal temperature. M or MS series.  |
| 54179   | Stroke adjuster (includes 29697 above). Useful for metering applications. Knurled knob with vertical scale on pump cap.   |
| 57905   | No return spring. Provides improved fill on suction stroke pumping liquefied gases by utilizing the inlet pressure. Only available on M and MS series.  |
| 59888   | Cycle timer installed.  |
| 80103   | Noise reduction kit fitted.   |
| 80348   | SAE outlet for M-pumps, 1/4" SAE, 6500 psi (448 bar) max.   |
| 81439   | EPR Seals for M and MS series for Liquid Section.   |
| 82367   | SS trim for 1/2 hp drive  |
| 82500   | ATEX Modification (Available on MS & 29723 but not M series).   |
| 85630   | Conversion kit, new style exhaust muffler.  |
| 86337   | Extended life air drive.  |

## .75 hp (.56 kW) Pump Models



### Key Features

- One model available in 9 ratios
- Output pressures to 15000 psi (1034 bar)
- Flows to 1.5 gpm (5.7 l/min)
- Choice of wetted materials
- Single air head
- Drive pressure 3 psi to 100 psi (.2 to 7 bar)

### Optional Modifications

| Number | Description  |
|--------|--|
| -C     | Air drive controls.  |
| 56964  | Extreme cycling service. Not recommended for long stall periods.                       |
| 56994  | External air pilot port, 1/4" NPT. Allows remote start/stop of pump.                   |
| 57639  | Low drive air pressure. Allows user to regulate drive air to as low as 3 psi (.2 bar). |
| 57960  | Single acting drive. Used for pumping liquefied gases under pressure.                  |
| 58475  | 1/4" NPT port on drive for recycle valve connection.                                   |
| 59354  | Noise reduction kit fitted.  |

| Model | Nominal Ratio | Maximum Working Pressure | Displacement per Cycle |
|-------|---------------|--------------------------|------------------------|
| 48    | -14           | 1500 psi (103 bar)       | 9 cu in (14.8 ml)      |
|       | -21           | 2300 psi (159 bar)       | 6 cu in (9.8 ml)       |
|       | -25           | 2700 psi (186 bar)       | 5 cu in (8.2 ml)       |
|       | -30           | 3200 psi (221 bar)       | 4.3 cu in (7.1 ml)     |
|       | -37           | 3800 psi (262 bar)       | 3.5 cu in (5.7 ml)     |
|       | -55           | 6000 psi (414 bar)       | 2.2 cu in (3.6 ml)     |
|       | -75           | 7800 psi (538 bar)       | 1.7 cu in (2.8 ml)     |
|       | -100          | 10600 psi (731 bar)      | 1.3 cu in (2.1 ml)     |
|       | -150          | 15000 psi (1034 bar)     | 0.88 cu in (1.4 ml)    |

For service codes, see page 17.

For weights and dimensions, see page 19.



## 1.5 hp (1.12 kW) Pump Models



### Key Features

- Choice of 11 models, 13 ratios, 48 possible combinations
- Output pressures to 50000 psi (3448 bar)
- Flows to 22 gpm (83.0 l/min)
- Choice of wetted materials
- Single air head
- Drive pressure 3 to 150 psi (.2 to 10 bar)

### Optional Modifications

| Number | Description   |
|--------|---|
| -C     | Air controls (filter, regulator, gauge, shut-off). 1/2" NPT.  |
| -CP    | Air controls with precision regulator. 1/2" NPT.  |
| -CO    | Air controls with recycle button. 1/2" NPT.   |
| -CPO   | Air controls with precision regulator and recycle button. 1/2" NPT.   |
| -B     | Bottom Inlet (designate "B" before ratio dash number "BR" on -B10, -B15, -B22 and -B32) 1.5 hp and 2 hp pumps (not applicable to high output, chemical, 2.2 hp, or AWD series pumps). |
| -W     | Additional upper foot bracket.  |
| 16821  | Low air pressure control feature. For operating at air pressures as low as 3 to 4 psi (.2 to .3 bar). Includes 28881 modification.  |
| 16831  | Low temperature modification. For special sealing in air drive for operating temperatures from as low as -20°F up to normal +120°F.   |
| 16834  | Exhaust adapter. With back pressure balance piston.   |
| 17860  | Electrical stroke counter provision. Includes BZES-2RQ microswitch.   |
| 25721  | Mechanical stroke counter, installed (6 digit).   |
| 27964  | Interconnecting inlet-outlet tubing. 1/2" female for 4:1 ratio series pumps (ATV-4 or DTV-4).   |
| 28000  | Threaded vent (or purge) ports on standard distance piece. Except 1.5:1 ratio.  |
| 28003  | Test port. Provides access port in pump's body between inlet and outlet check valves for 1.5 hp and 2 hp pumps. -10 ratio or higher, single acting.                                   |
| 28881  | Air pilot modification. 1/2" NPT. Allows remote start/stop of pump.   |
| 29376  | Three-way cycling spool. For 1.5 hp and 2 hp single acting pumps, for use with CO <sub>2</sub> .  |
| 29702  | Single stroke modification.   |

| Model                  | Nominal Ratio                     | Maximum Working Pressure   | Displacement per Cycle  |
|------------------------|-----------------------------------|--|---|
| DSTV <sup>PI</sup>     | -1.5                              | 160 psi (11 bar)   | 319 cu in (513.0 m)   |
| ATV, DTV <sup>PI</sup> | -4                                | 1200 psi (83 bar)  | 200 cu in (328.0 m)   |
| AW, ASF, DF, DSF, DSTV | -B10<br>-B15<br>-25<br>-35<br>-60 | 1600 psi (110 bar)<br>2400 psi (165 bar)<br>4000 psi (275 bar)<br>5700 psi (393 bar)<br>9800 psi (675 bar) | 4 cu in (66.4 m)<br>2.7 cu in (44.3 m)<br>1.6 cu in (26.5 m)<br>1.2 cu in (19 m)<br>.7 cu in (11 m) |
| AW, ASF, DF, DSF, DSTV | -100<br>-150                      | 16500 psi (1138 bar)<br>20000 psi (1375 bar)   | 4 cu in (6.7 m)<br>28 cu in (4.5 m)   |
| HF, HSF, DSHF          | -151<br>-225<br>-300              | 28000 psi (1724 bar)<br>37000 psi (2551 bar)<br>50000 psi (3448 bar)                                       | 28 cu in (4.5 m)<br>.18 cu in (3.0 m)<br>.14 cu in (2.3 m)  |
| HF                     | -450                              | 49000 psi (3403 bar)   | .09 cu in (1.5 m)   |

(1) These series are "lift" pumps and maximum outlet pressure is (air drive x pump ratio) + inlet pressure

For service codes, see page 17.

For weights and dimensions, see page 20.

| Number | Description   |
|--------|---|
| 29806  | Double distance piece. For 1.5 hp and 2 hp pumps only, except 1.5:1 ratio.  |
| 51050  | Extreme service cycling modification. Not recommended for long stall periods.   |
| 51056  | Exhaust/pilot vent combination.   |
| 51331  | EPR (Ethylene propylene) static seals in wetted section. Applies to distance piece pumps only.  |
| 51345  | Sour gas drive provision to N.A.C.E. specifications. 1.5 hp to 2.2 hp distance piece pumps only, single air head and double air head. |
| 52788  | Viton seals air drive.  |
| 53825  | Severe Arctic low temperature service. -25, -35, -60, -100, -150, -151, -225, -300, -450 ratios.                                      |
| 54885  | Rotate pump body 90° from standard.   |
| 54935  | SS trim for 5/3 air drive.  |
| 55305  | Tube ports. 3/4" SAE inlet and outlet. For 1.5 hp to 2 hp pumps. 15 pump minimum.   |
| 55516  | Polyurethane ("W") seal. For ForTV series pumps, except high output models.   |
| 55630  | Stainless steel (AISI-316) distance piece. For 1.5 hp to 2 hp pumps.  |
| 59353  | Noise reduction kit fitted. Not available on AFD, DFD, ASFD or DSFD.  |
| 82460  | HNBR seals in air drive section.  |
| 82500  | ATB (modification not available on AW or DSHW pumps).   |
| 82988  | 3/8" High pressure outlet converts medium ratio 10-122 outlet 1/2" port to high pressure port.  |
| 86337  | Extended life air drive.  |

## 1.5 hp (1.12 kW) High Output Flow Pumps

Available in a choice of 3 models, these high output, low ratio pumps are capable of pressures to 1200 psi (82 bar) and flow rates of up to 22 gpm (83 l/min). These are "lift" pumps whereby the outlet pressure equals the air drive x the pump ratio plus the inlet pressure.

Model DSTV-1.5 has a maximum air drive of 150 psi (10 bar) and is capable of pressures up to 160 psi (11 bar). The model ATV and DTV-4 work on a maximum air drive of 150 psi (10 bar) and have a maximum pressure rating of 1200 psi (83 bar). A noise reduction modification is available for applications where noise level is an issue.


## Distance Piece (Separation)

Pumps with prefix "D" in the model number have aluminum distance piece between the air drive and pump section (except DSTV-1.5). Vent holes can be threaded  $\frac{1}{2}$ " NPT female at extra cost. Specify modification number 28000. Horizontal mounting is recommended for non-exchange of contaminants.


## Mounting Brackets

All series mounting brackets have  $\frac{7}{16}$ " holes (slots) for  $\frac{3}{8}$ " bolts. Upper mounting brackets are not furnished as standard on single air head non-distance piece units.

### Dimensional Data





### Mounting Brackets



## Optional Pump Inlets for Tank Mounting

To specify ratios -10, -15, -22 or -32, add "BR" between the model number and the ratio, e.g. AUV-BR10.

Inlet externally threaded  $1\frac{1}{4}$ " NPT male  
Internally threaded 1" NPT female



To specify ratios -25 through -903, add "B" between the model number and the ratio, e.g. AUV-B25.

Inlet on the bottom and externally threaded 1" NPT male  
Internally threaded  $\frac{1}{2}$ " NPT female

Drive inlet and exhaust are  $\frac{1}{2}$ " NPT female. Drive inlet also includes a  $\frac{1}{2}$ " NPT male x  $\frac{1}{2}$ " NPT female (straight pipe thread) swivel adapter (connecting male nipple should include 30° inside bevel for proper fit).



## 2 & 2.2 hp (1.49 & 1.64 kW) Pump Models



### Key Features

- Choice of 16 models, 13 ratios, 46 possible combinations
- Output pressures to 100000 psi (7000 bar)
- Flows to 5 gpm (15 l/min)
- Choice of wetted materials
- Double and triple air heads
- Drive pressure 3 to 100 psi (.2 to 7 bar)

|        | Model                  | Nominal Ratio                      | Maximum Working Pressure  | Displacement per Cycle   |
|--------|------------------------|------------------------------------|---|--|
| 2 hp   | AW, ASF, DF, DSF, DSTV | -B22<br>-B32<br>-S2<br>-T2<br>-122 | 3200 psi (221 bar)<br>4800 psi (331 bar)<br>8000 psi (552 bar)<br>11000 psi (758 bar)<br>19000 psi (1310 bar) | 4 cu in (66.4 ml)<br>2.7 cu in (44.3 ml)<br>1.6 cu in (26.6 ml)<br>1.2 cu in (19 ml)<br>.7 cu in (11 ml) |
|        | HF, HSF, DHF, DSHF     | -202<br>-302                       | 33000 psi (2275 bar)<br>50000 psi (3448 bar)  | 4 cu in (6.7 ml)<br>28 cu in (4.5 ml)  |
|        | DXHF, DSXHF            | -452<br>-602                       | 70000 psi (4827 bar)<br>75000 psi (5171 bar)  | .18 cu in (3.0 ml)<br>.14 cu in (2.3 ml)   |
|        | DXHF, DSXHF            | -683<br>-803                       | 70000 psi (4827 bar)<br>75000 psi (5171 bar)  | .18 cu in (3.0 ml)<br>.14 cu in (2.3 ml)   |
|        | DSXHW                  | -1373                              | 100000 psi (6895 bar)   | .09 cu in (1.4 ml)   |
| 2.2 hp | AFD, DSFD, DFD, ASFD   | -860                               | 6500 psi (448 bar)  | 1.3 cu in (22 ml)  |

For service codes, see page 17.

For weights and dimensions, see page 20.

## 3 hp (2.24 kW) Pump Models



### Key Features

- One model available in 8 ratios
- Output pressures to 33000 psi (2275 bar)
- Flow rates to 8 gpm (30 l/min)
- Single air head
- Drive pressure 3 to 150 psi (.2 to 10 bar)

| Model | Nominal Ratio | Maximum Working Pressure* | Displacement per Cycle |
|-------|---------------|---------------------------|------------------------|
| ASFD  | 10            | 1600 psi (110 bar)        | 8.1 cu in (132.8 ml)   |
|       | 15            | 2400 psi (165 bar)        | 5.4 cu in (88.6 ml)    |
|       | 25            | 4000 psi (275 bar)        | 3.3 cu in (53.2 ml)    |
|       | 35            | 5700 psi (393 bar)        | 2.3 cu in (38 ml)      |
|       | 60            | 9800 psi (676 bar)        | 1.3 cu in (22 ml)      |
|       | 100           | 16500 psi (1138 bar)      | .8 cu in (13.4 ml)     |
|       | 150           | 20000 psi (1379 bar)      | .6 cu in (9 ml)        |
|       | 202           | 33000 psi (2275 bar)      | .8 cu in (13.4 ml)     |

\* Continuous/Intermittent


For service codes, see page 17.

For weights and dimensions, see page 21.

### Optional Modifications (for 2 hp, 2.2 hp and 3 hp pump models)

| Number | Description   |
|--------|---|
| -C     | Air controls (filter, regulator, gauge, shut-off). ½" NPT.  |
| -CP    | Air controls with precision regulator. ½" NPT.  |
| -C0    | Air controls with recycle button. ½" NPT.   |
| -CP0   | Air controls with precision regulator and recycle button. ½" NPT.   |
| -B     | Bottom Inlet (designate "B" before ratio dash number, "BR" on -B10, -B15, -B22 and -B32) 1.5 hp and 2 hp pumps (not applicable to high output, chemical, 2.2 hp, or AWD series pumps) |
| 16821  | Low air pressure control feature. For operating at air pressures as low as 3 to 4 psi (.2 to .3 bar).   |
| 16831  | Low temperature modification. For special sealing in air drive for operating temperatures from as low as -20°F up to normal +120°F.   |
| 16834  | Exhaust adapter. With back pressure balance piston.   |
| 17860  | Electrical stroke counter provision. Includes BZES-2RQ microswitch.   |
| 25721  | Mechanical stroke counter. Installed (6 digit).   |
| 27964  | Interconnecting inlet-outlet tubing. ½" female for 4:1 ratio series pumps (ATV-4 or DTV-4).   |
| 28000  | Threaded vent (or purge) ports on standard distance piece. Except 1.5:1 ratio and 3 hp pump.  |
| 28003  | Test port. Provides access port in pump's body between inlet and outlet check valves for 1.5 hp and 2 hp pumps, -10 ratio or higher, single acting.                                   |
| 28881  | Air pilot modification. ½" NPT - Allows remote start/stop of pump.  |
| 29376  | Three-way cycling spool. For 1.5 hp and 2 hp single acting pumps.   |
| 29702  | Single stroke modification. Except 3 hp pump.   |
| 29806  | Double distance piece. For 1.5 hp and 2 hp pumps only, except 1.5:1 ratio.  |

| Number | Description   |
|--------|---|
| 51050  | Extreme service cycling modification. Not recommended for long stall periods.   |
| 51056  | Exhaust pilot vent combiner.  |
| 51331  | EPR (Ethylene propylene) static seals in wetted section. Applies to distance piece pumps only.  |
| 51345  | Sour gas drive provision to N.A.C.E. specifications. 1.5 hp to 2.2 hp distance piece pumps only, single air head and double air head. |
| 52788  | Viton seals. Air drive only - 1.5 hp to 2.2 hp pumps only.  |
| 53825  | Severe Arctic low temperature service. -25, -35, -60, -100, -150, -151, -225, -300, -450 ratios except 3 hp pump.                     |
| 54885  | Rotate pump body 90° from standard. Except 3 hp pump.   |
| 54935  | SS trim for 5/3 air drive.  |
| 55191  | Mounting ring kit for AWD series.   |
| 55192  | 3/4 NPT inlet port installed on AWD series (in place of threaded port).   |
| 55193  | Extra foot bracket installed.   |
| 55305  | Tube ports. ½" SAE inlet and outlet - for 1.5 hp to 2 hp pumps, 15 pump minimum.  |
| 55465  | Ceramic Plunger-60 Ratio.   |
| 55516  | Polyurethane "W" seal in "F" series pumps-except high output models.  |
| 55630  | Stainless steel (SS-316) distance piece - for 1.5 thru 2 hp pumps.  |
| 59353  | Noise reduction kit fitted. Not available on AFD, DFD, ASFD or DSFD.  |
| 59888  | Cycle timer installed.  |
| 82460  | HNBR Seals in air drive section.  |
| 82500  | ATBC modification (not available on AAW or DSXHW pumps).  |
| 86337  | Extended life air drive.  |

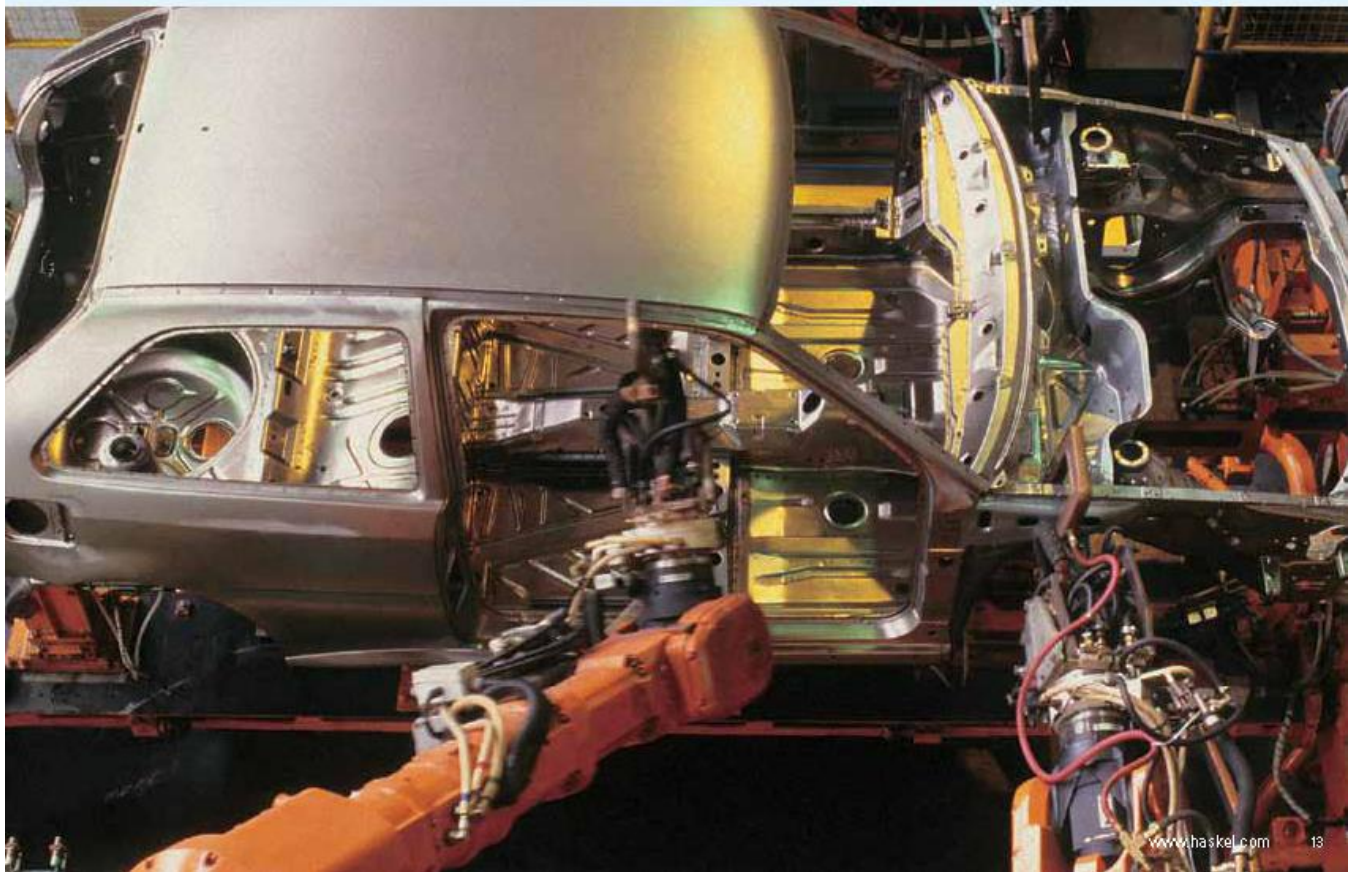

## 6 hp (4.47 kW) Pump Models



### Key Features

- Choice of 10 models, 4 ratios, 20 possible combinations
- Output pressures to 10000 psi (690 bar)
- Flow rates to 21 gpm (80 l/min)
- Choice of wetted materials
- Single air head – double acting
- Drive pressure 3 to 125 psi (.2 to 9 bar)
- All hydraulic fluids, water (plain or DI), solvents

| Model  | Nominal Ratio      | Maximum Working Pressure  | Displacement per Cycle                                     |
|--|--------------------|---|--|
| GWD,<br>GSFD,<br>DGSFD <sup>(1)</sup> ,<br>DGSFD <sup>(1)</sup> ,<br>DGSTVD <sup>(1)</sup> | -12                | 4000 psi (276 bar)  | 159 cu in (260 m)  |
| GW, GSF,<br>DGF,<br>DGSF,<br>DGSTV   | -35<br>-60<br>-100 | 4375 psi (302 bar)<br>7900 psi (517 bar)<br>10000 psi (690 bar) | 6.0 cu in (98 m)<br>3.5 cu in (57 m)<br>2.1 cu in (34.5 m) |

(1) Double Acting "Lift" Pumps

*For service codes, see page 17.*

*For weights and dimensions, see page 22.*

Incorporating 10 models, this heavy duty range of double acting pumps provide pressures up to 10000 psi (690 bar) and flow rates up to 4 gpm (15 l/min).

Designed to operate with air drive pressures between 40 and 125 psi (2.8 and 9 bar). For drive pressures 3 to 40 psi (.2 to 2.8 bar), order 51875-1 mod.

## 8 hp (5.97 kW) Pump Models



### Key Features

- Choice of 6 models, 5 ratios, 9 possible combinations
- Pressures to 22500 psi (1530 bar)
- Flow rates to 11.5 gpm (44 l/min)
- All hydraulic fluids, water (plain or DI), solvents, liquefied gases
- Choice of wetted materials
- Single air head – double acting
- Drive pressure 3 to 125 psi (.2 to 9 bar)

| Model                                      | Nominal Ratio                   | Maximum Working Pressure   | Displacement per Cycle  |
|--|---------------------------------|--|---|
| 8SFD,<br>8DFD,<br>8DSFD,<br>8DSTVD,<br>8FD | -25 <sup>(1)</sup>              | 4000 psi (276 bar)   | 14 cu in (229 m)  |
| 8SFD<br>8DSFD                              | 40<br>65<br>-100 <sup>(1)</sup> | 6000 psi (408 bar)<br>10000 psi (690 bar)<br>10000 psi (690 bar) | 9 cu in (145.3 m)<br>5.4 cu in (88.2 m)<br>3.5 cu in (57.5 m) |
| 8HSFD                                      | -22.9 <sup>(1)</sup>            | 22500 psi (1530 bar)   | 1.6 cu in (25.5 m)  |

(1) Double Acting "Lift" Pumps

*For service codes, see page 17.*

*For weights and dimensions, see page 23.*

## 10 hp (7.46 kW) Pump Models



### Key Features

- Choice of 4 models, 4 ratios, 4 possible combinations
- Pressures to 36000 psi (2500 bar)
- Flow rates to 3 gpm (11 l/min)
- Drive pressure 3 to 125 psi (.2 to 9 bar)
- All hydraulic fluids, water (plain or DI), solvents, liquefied gases
- Choice of wetted materials

| Model   | Nominal Ratio                            | Maximum Working Pressure                     | Displacement per Cycle                      |
|---------|--|--|---|
| D14 STD | 125 <sup>PSI</sup><br>315 <sup>PSI</sup> | 16000 psi (1103 bar)<br>36000 psi (2482 bar) | 8.8 cu in (144.2 ml)<br>3.5 cu in (57.4 ml) |
| D14 SFD | 125 <sup>PSI</sup><br>315 <sup>PSI</sup> | 16000 psi (1103 bar)<br>36000 psi (2482 bar) | 8.8 cu in (144.2 ml)<br>3.5 cu in (57.4 ml) |

(1) Double Acting "Lift" Pumps

For service codes, see page 17.

For weights and dimensions, see page 23.

Incorporating two basic models, this heavy duty range of double acting pumps provide pressures up to 36000 psi (2482 bar) and output flow rate up to 3 gpm (11 l/min).

Operating from a maximum air drive pressure of 125psi (9 bar), these pumps are designed for medium to high pressure service with minimum maintenance.

These large, slow speed pumps approach a seal life as high as 5 times that of many smaller pumps and this advantage becomes ever greater in heavy duty service involving water, or other liquids with negligible lubricity.

### Optional Modifications (for 6 hp, 8 hp and 10 hp pump)

| Number  | Description  |
|---------|--|
| C       | Air controls.  |
| 17860   | Electrical stroke counter provision (includes BZE5-2RQ micro switch).        |
| 25721   | Mechanical stroke counter installed (5 digit).                               |
| 29077   | Interconnecting tubing—6 hp and 8 hp pumps, double ended.                    |
| 29077-1 | Interconnecting tubing—6 hp and 8 hp pumps, double ended low ratio pumps.    |
| 29078   | Same as 29077, 29077-1 double ended w/distance piece.                        |
| 29078-1 | Same as 29077, 29077-1 double ended w/distance piece low ratio pumps.        |
| 29079   | Interconnecting tubing—10 hp pumps.  |
| 29125   | External pilot modification—for 6 hp thru 10 hp pumps.                       |
| 51875-1 | Low air pressure control—for 6 hp thru 10 hp pumps.                          |
| 54030   | Source gas air drive provision to NACE spec. 6 hp distance piece pumps only. |

| Number  | Description  |
|---------|--|
| 54312   | Extreme service cycling modification—for 6 hp thru 10 hp pumps.  |
| 54336   | Exhaust/pilot vent combiner.   |
| 55330   | Interconnecting tubing 8D SFD-100 low pressure inlet.  |
| 55330-1 | Interconnecting tubing 8D SFD-100 high pressure inlet.   |
| 55366   | Interconnecting tubing 8D SFD-225.   |
| 57002   | Viton seals—air drive only—6 hp.   |
| 57944   | Viton seals—air drive only—8 hp.   |
| 59888   | Cycle timer installed.   |
| 82500   | ATEX modification available for 6 hp only, not available on 8 hp or 14 hp drive, nor on GWW, GSE, DGSF, G SFD, or D6 SFD models. |
| 86337   | Extended life air drive.   |



## Power System Specialists

World safety standards and quality demands are rising. Component manufacturers are required to provide test certification and product quality assurance which can only be determined using the types of systems which Haskel can provide. Typically, we have built systems for production and field testing the proof, leak, and burst aspects of hoses, cylinders, and valves.

These systems can be portable, mobile, or static test rigs. We also offer a range of standard pressure packs used for power jacking, clamping, and other applications where reliable power is needed.

## Selecting Your Accessories

Haskel can either provide accessories separately or supply them fitted to form a complete package suited to your application. Additionally, Haskel can fit customer nominated accessories. Our accessories catalog is available and our technical support team is always ready to advise you on the most suitable choice of accessories for your application.

- Air pilot switches
- Air pilot valves
- Regulating relief valves
- Directional control and release valves
- Hydraulic accumulators, gas receivers and storage cylinders
- High pressure valves, fittings and tubing
- Plenum chambers
- Port adapters
- Pressure regulators
- Gauge snubbers
- Filters
- Stainless steel check valves
- Intensifiers with integral checks for cycling
- Capillary type gauge snubbers

## Quality and After-Sale Service



Haskel meets the requirements of international quality assurance ISO 9001. Build quality is matched by an innovative design and problem solving ability which stems from years of experience. Our representatives around the world are carefully chosen and trained to help you arrive at a correct product choice, and to offer a maintenance and parts service that is second to none.

*Please ask for your copy of our latest accessories brochure.*



## Liquids Compatible with Haskel Pumps

To assist in easier pump selection, we have classified various popular liquids in groups and assigned to each group a service code. These service code numbers are featured in the chart to the right and are designated for each pump series. Seals and other wetted materials can be supplied to suit your preferred liquid. For advice, please contact our technical services personnel at 818-843-4000.

### Services

#### Service Codes

**1** Petroleum-based oils, kerosene, water with 5% soluble oil.

**2** Plain water, diesel fuel.

**3** Most phosphate ester-based fire-resistant hydraulic fluids, e.g. Pydraul, Lindol, Cellulube, Fyrquel, and Houghtosafe 1120 and petroleum-based solvents compatible with UHMWPE (Ultra-high Molecular Weight Polyethylene) dynamic seals and Viton static seals.

**4** Petroleum-based solvents, e.g. boron fuels, aromatic hydrocarbons (benzene, toluene, xylene, hylene, etc.); chlorinated solvents (trichlorethylene, carbon tetrachloride, chlorobenzene, etc.); mercaptans, Dowtherm A, fluorinated solvents (fluorobenzene, fluorochlorethylene, etc.); Dowtherm E, plus all of Group 3 and some mildly corrosive acids compatible with wetted materials. See note 5A for service with methyl-ethyl-ketone, methyl acetone, diacetone, alcohol and freon 22.

**5** Skydrol and Aerosafe hydraulic fluid; acetone and some alcohols (ethyl, methyl, and isopropyl).

**5A.** Also suitable for these fluids if Viton static seals are replaced with EPR; specify modification number 51331 (no extra charge); e.g., 51331-MDTV-5. Most phosphate ester-based fluids solidify at approximately 30000 psi.

**6** Deionized water; demineralized water.

**Note:** Dynamic seal life with non-lubricating fluids will understandably be less than with lubricating types.

### Operating Temperatures

#### Drive Section

-4° (25°F) to +65°C (150°F) (low temperature seals are available for Arctic operation).




#### Liquid Section


For reasonable seal life, high temperature should be limited to 54° C (130° F), for F and W seal models, 135° C (275° F) for T and TV models (with distance piece).

| hp              | Model          | Services |   |   |   |   |    |   |  |
|-----------------|----------------|----------|---|---|---|---|----|---|--|
|                 |                | 1        | 2 | 3 | 4 | 5 | 5A | 6 |  |
| .33             | M              | •        |   |   |   |   |    |   |  |
|                 | MS             | •        | • |   |   |   |    |   |  |
|                 | MDTV           | •        |   | • |   |   | •  |   |  |
|                 | MDSTV          | •        | • | • | • |   | •  |   |  |
|                 | MCPV           | •        | • | • | • | • |    |   |  |
|                 | 29723          | •        | • | • |   | • |    | • |  |
| .75             | 4B -14 to -37  | •        |   |   |   |   |    |   |  |
|                 | 4B -55 to -150 | •        | • |   |   |   |    |   |  |
| 1.5<br>2<br>2.2 | AW             | •        |   |   |   |   |    |   |  |
|                 | ASF            | •        | • |   |   |   |    |   |  |
|                 | DF             | •        |   | • |   |   | •  |   |  |
|                 | DSF            | •        | • | • |   |   | •  | • |  |
|                 | HF             | •        |   |   |   |   |    |   |  |
|                 | HSF            | •        | • |   |   |   |    |   |  |
|                 | DHF            | •        |   |   |   |   | •  |   |  |
|                 | DSHF           | •        | • |   |   |   | •  | • |  |
|                 | DSTV           | •        | • | • | • |   | •  |   |  |
|                 | ATV            | •        | • |   |   |   |    |   |  |
|                 | DTV            | •        | • |   |   |   | •  |   |  |
|                 | DSTV -1.5      | •        | • | • | • |   | •  | • |  |
|                 | AFD            | •        |   |   |   |   |    |   |  |
|                 | DFD            | •        |   | • |   |   | •  |   |  |
|                 | ASFD           | •        | • |   |   |   |    |   |  |
|                 | DSFD           | •        | • | • |   |   | •  | • |  |
| 3               | ASFD           | •        | • |   |   |   |    |   |  |
|                 | 6              | GW       | • |   |   |   |    |   |  |
|                 |                | GSF      | • | • |   |   |    |   |  |
|                 |                | DGF      | • |   | • |   |    | • |  |
| DGSF            |                | •        | • | • |   |   | •  | • |  |
| DGSTV           |                | •        | • | • | • |   | •  |   |  |
| GWD             |                | •        |   |   |   |   |    |   |  |
| GSFD            |                | •        | • |   |   |   |    |   |  |
| DGFD            |                | •        |   | • |   |   | •  |   |  |
| DGSFD           |                | •        | • | • | • |   | •  | • |  |
| DGSTVD          | •              | •        | • | • |   | • |    |   |  |
| 8               | 8FD            | •        |   |   |   |   |    |   |  |
|                 | 8SFD           | •        | • | • | • |   | •  |   |  |
|                 | 8DFD           | •        |   |   |   |   |    |   |  |
|                 | 8DSFD          | •        | • |   |   |   |    |   |  |
|                 | 8DSTVD         | •        |   | • |   |   | •  |   |  |
|                 | 8HSFD          | •        | • | • | • |   | •  |   |  |
| 10              | D14STD -125    | •        | • | • | • |   | •  |   |  |
|                 | D14STD -315    | •        | • | • | • |   | •  |   |  |
|                 | D14SFD -125    | •        | • | • |   |   |    | • |  |
|                 | D14SFD -315    | •        | • | • |   |   | •  | • |  |


# Weights and Dimensions

## .33 hp (.25 kW) M Series Pump Models

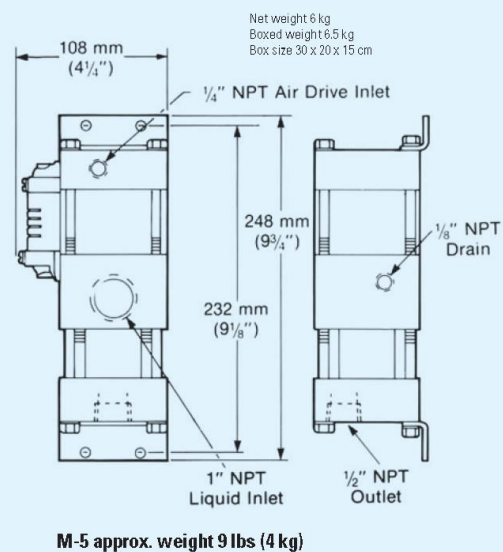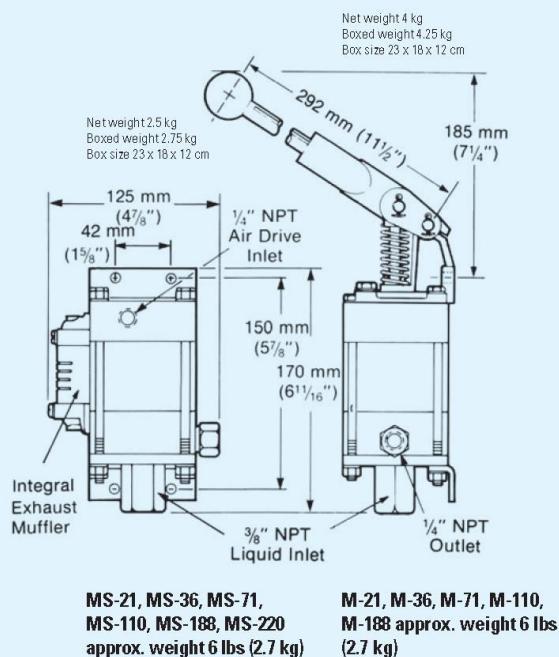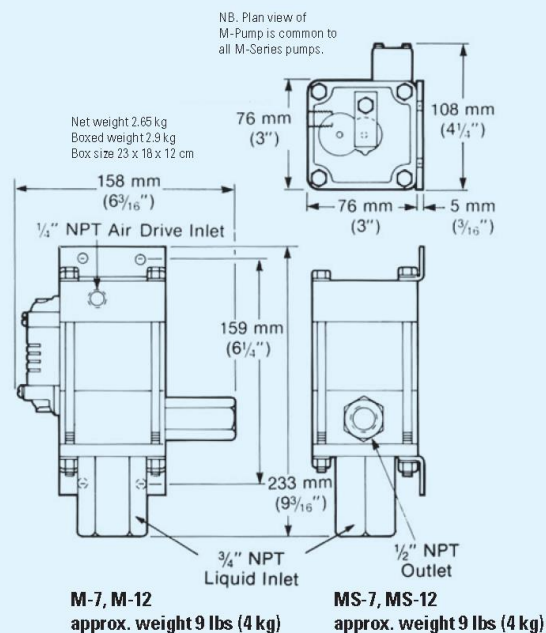








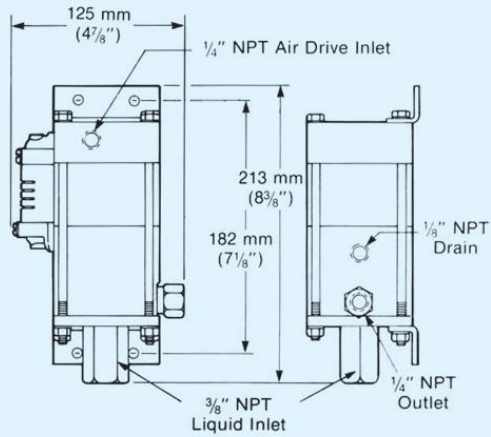


29723-21, 29723-36, 29723-71, 29723-110  
approx. weight 6.5 lbs (3 kg)


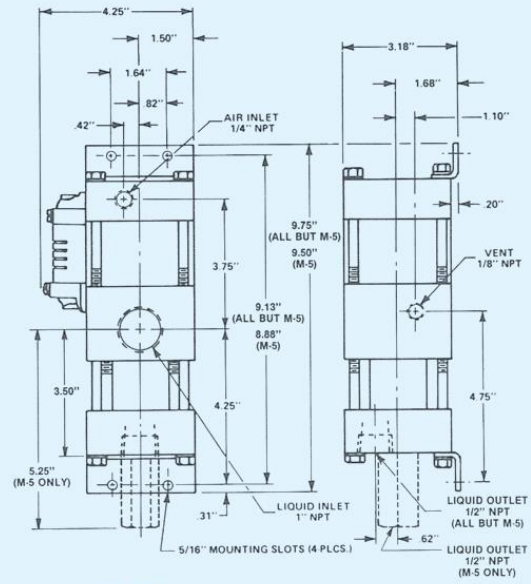


MDSTV-5  
Approx weight 15 1/2 lbs (7 kg)


## .75 hp (.56 kW) Pump Models

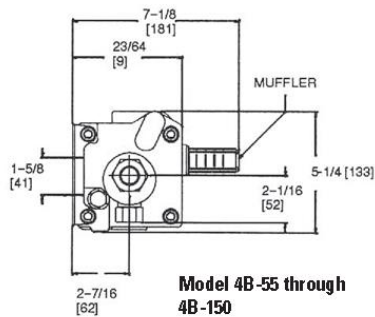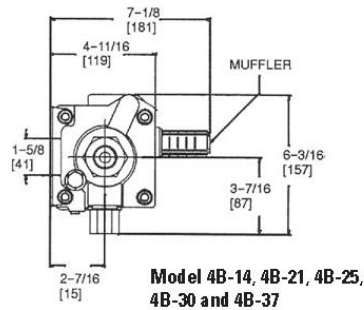

## 1.5 hp, 2 & 2.2 hp (1.12, 1.49 & 1.64 kW) Pump Models

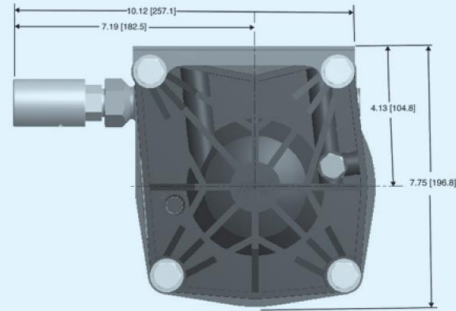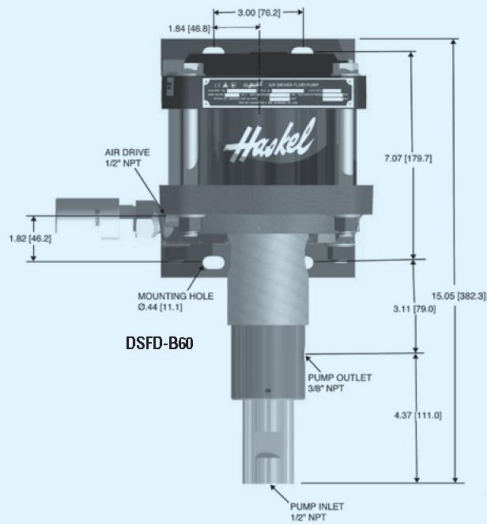


Net weight 18 kg  
Boxed weight 20 kg  
Box size 68 x 42 x 50 cm

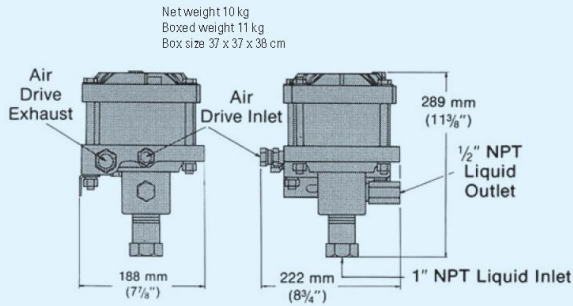


Net weight 10 kg  
Boxed weight 11 kg  
Box size 37 x 37 x 38 cm

**1.5 and 2 hp low ratio pumps;  
-B10 and -B15 ratios**

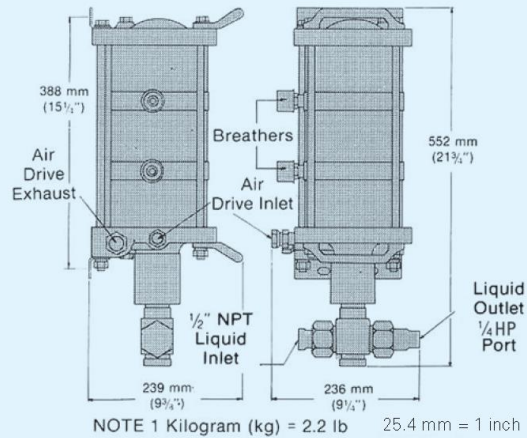


NOTE 1 Kilogram (kg) = 2.2 lb 25.4 mm = 1 inch

**1.5 and 2 hp high ratio pumps;  
-683 and -903 ratios**

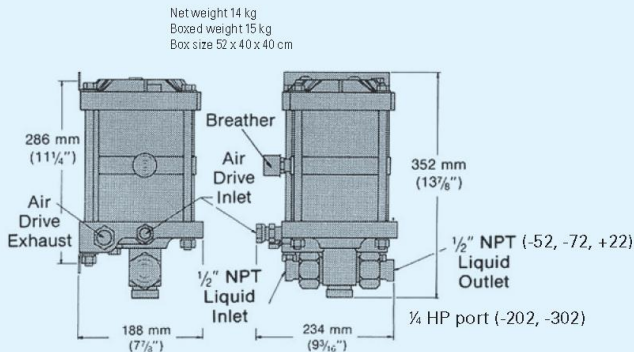


**1.5 and 2 hp medium ratio pumps;  
-52, -72, -122, -202 and -302 ratios**

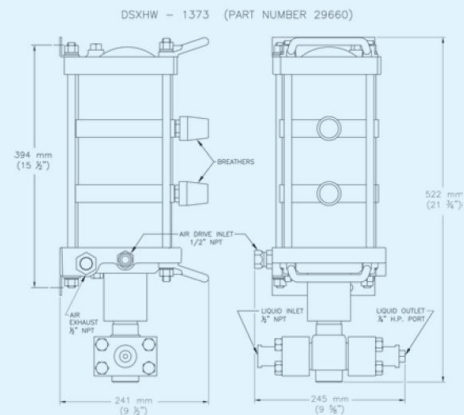


**2 & 2.2 hp (1.49 & 1.64 kW) Pump Models**

Net weight 18 kg  
Boxed weight 19 kg  
Box size 45 x 37 x 44 cm

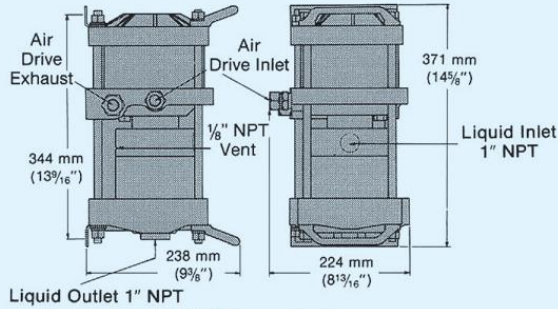

**DSTV-1.5 pump; single acting, high output**


Net weight 10 kg  
Boxed weight 11 kg  
Box size 45 x 37 x 44 cm

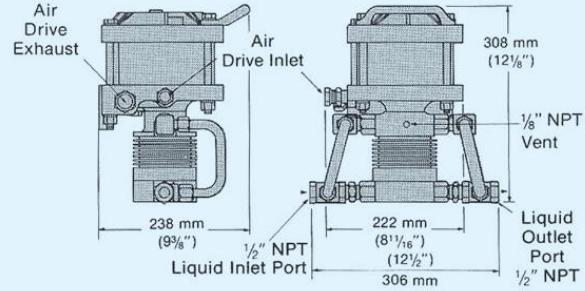


**ATV-4 pumps; double acting, high output**

Note: For model DTV-4, add distance piece dimension from page 11.  
Interconnecting inlet and outlet port tubing shown.

Net weight 9.5 kg  
Boxed weight 10 kg  
Box size 25 x 26 x 22 cm

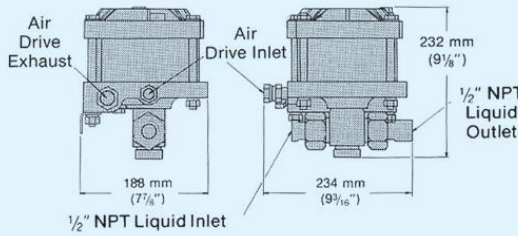


**1.5 and 2 hp medium and high ratios; -25 through -150, -151, -225, -300 and -450 ratios**

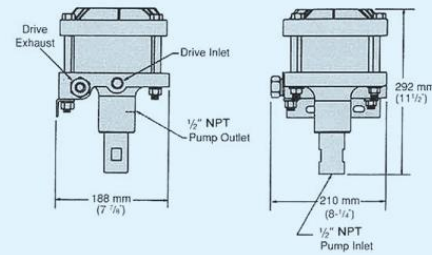


**AFD or ASFD, -B60, -B100 pumps; double acting, high output**


## 3 hp (2.24 kW) Pump Models

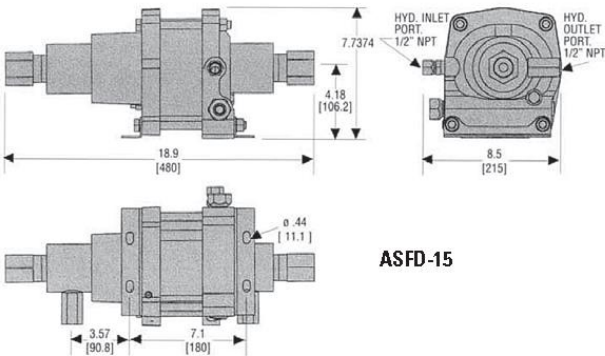

**ASFD-15**




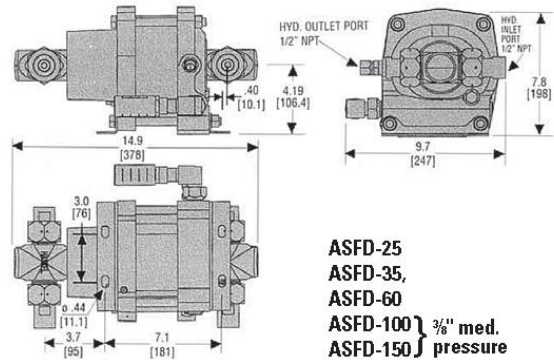


**ASFD-25  
ASFD-35,  
ASFD-60  
ASFD-100 } 3/8" med.  
ASFD-150 } pressure**

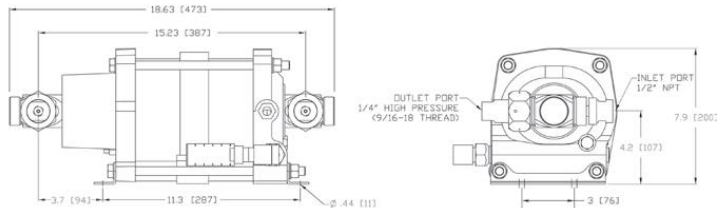

**ASFD-202**


## 6 hp (4.47 kW) Pump Models

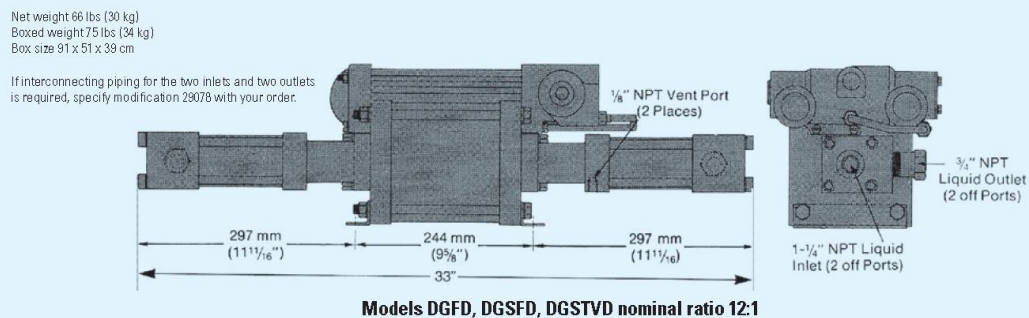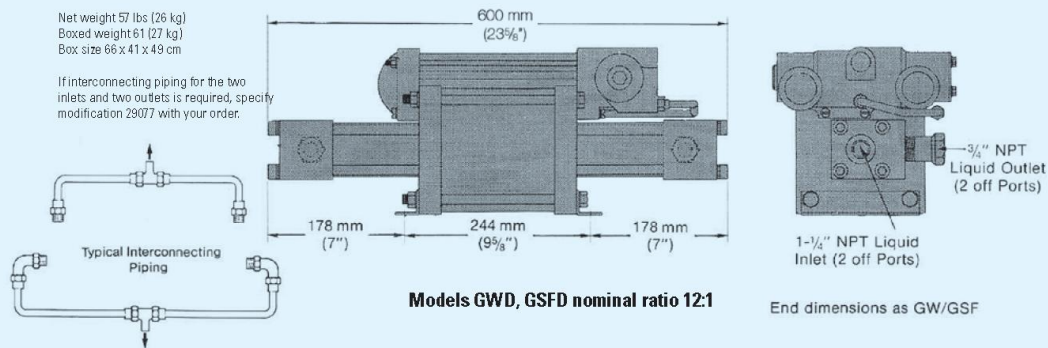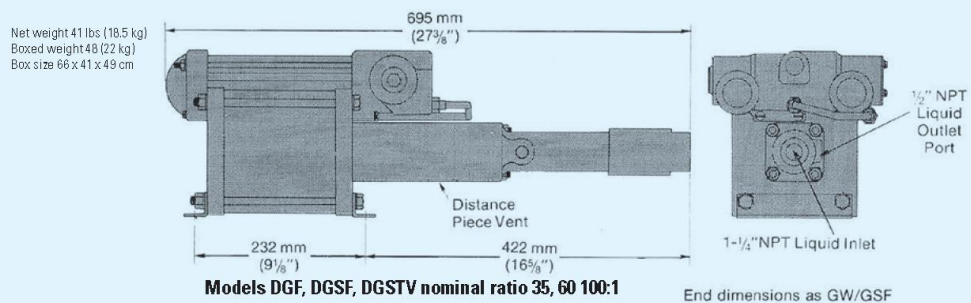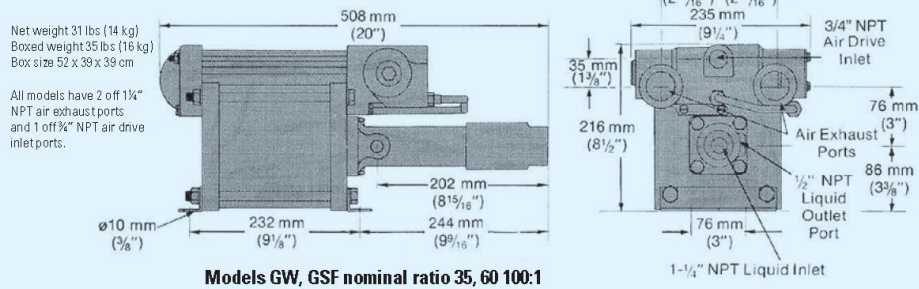

## 8 hp (5.97 kW) Pump Models

| Model                            | Length             | Width           | Height       | Weight           | Air Drive | Liquid Inlet                                 | Liquid Outlet                                |
|----------------------------------|--------------------|-----------------|--------------|------------------|-----------|--|--|
| 8FD-25<br>8SFD-25                | 25 3/8" (644.5 mm) | 9 1/2" (241 mm) | 11" (279 mm) | 80 lbs (36 kg)   | 3/4"      | 1 1/4" NPT <sup>(2)</sup>                    | 3/4" NPT <sup>(2)</sup>                      |
| 8DFD-25<br>8DSFD-25<br>8DSTVD-25 | 34 3/4" (883 mm)   | 9 1/2" (241 mm) | 11" (279 mm) | 94 lbs (43 kg)   | 3/4"      | 1 1/4" NPT <sup>(2)</sup>                    | 3/4" NPT <sup>(2)</sup>                      |
| 8SFD-40                          | 26 7/8" (683 mm)   | 9 1/2" (241 mm) | 11" (279 mm) | 64 lbs (29 kg)   | 3/4"      | 1" NPT                                       | 3/4" NPT                                     |
| 8SFD-65                          | 26 7/8" (683 mm)   | 9 1/2" (241 mm) | 11" (279 mm) | 63 lbs (28.5 kg) | 3/4"      | 1" NPT                                       | 1/2" NPT                                     |
| 8HSFD-225                        | 28 3/4" (721)      | 9 1/2" (241 mm) | 11" (279 mm) | 71 lbs (32 kg)   | 3/4"      | 3/4" M/P (20K coned and threaded connection) | 3/8" M/P (20K coned and threaded connection) |
| 8DSFD-100                        | 41 3/4" (1060 mm)  | 9 1/2" (241 mm) | 11" (279 mm) | 92 lbs (42 kg)   | 3/4"      | 1 1/4" NPT <sup>(2)</sup>                    | 3/4" NPT <sup>(2)</sup>                      |

## 10 hp (7.46 kW) Pump Models

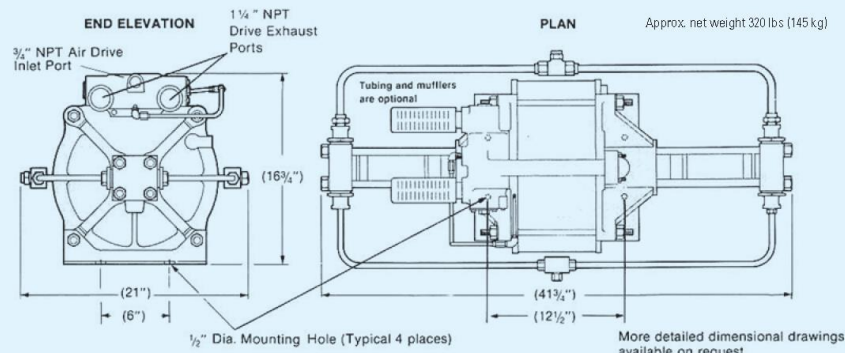

Note: See 29079 interconnecting tubing optional page 15. (29079 shown)  
 Single Inlet port – 3/4" JIC male flare connection, single outlet port 3/4" HP ports (BuTech).  
 Individual Pump ports – Liquid inlets 2 ea. 1/2" NPT ports, 2 ea. 3/4" HP ports (BuTech)

CELEBRATING OVER 60  
YEARS OF HYDRAULIC AND  
PNEUMATIC ENGINEERING  
EXPERIENCE IN THE DESIGN  
AND MANUFACTURING  
OF HIGH PRESSURE  
GENERATING EQUIPMENT  
AND CONTROLS



QMS225  
EMS011320

**Haskel International, Inc.**

100 East Graham Place  
Burbank, California 91502 USA  
Tel: 818-843-4000 / Fax: 818-556-2549 or 818-841-4291  
[www.haskel.com](http://www.haskel.com)

**Haskel Europe Ltd.**

North Hylton Road  
Sunderland SR5 3JD, England, UK  
Tel: 44-191-549-1212 / Fax: 44-191-549-0911  
[www.haskel-europe.com](http://www.haskel-europe.com)





**Haskel Middle East**

Hamilton Sundstrand Industrial ME FZE  
P.O. Box 262384 Jebel Ali, Dubai, United Arab Emirates  
Tel: +971 4886 2686 / Fax: +971 4886 2687  
Email: [sales@haskel.ae](mailto:sales@haskel.ae)

**Haskel Asia**

Hamilton Sundstrand Singapore Industrial Pte. Ltd.  
23 Tagore Lane #03-06  
Tagore 23 Warehouse Complex, Singapore 787601  
Tel: 65-6455-7589 / Fax: 65-6455-2841  
[www.haskel.com.sg](http://www.haskel.com.sg)

For further information on Haskel  
products, please visit us online at  
[www.haskel.com](http://www.haskel.com)

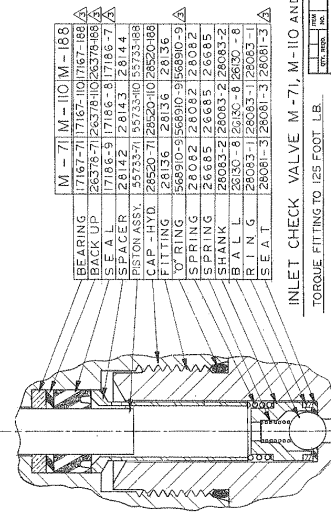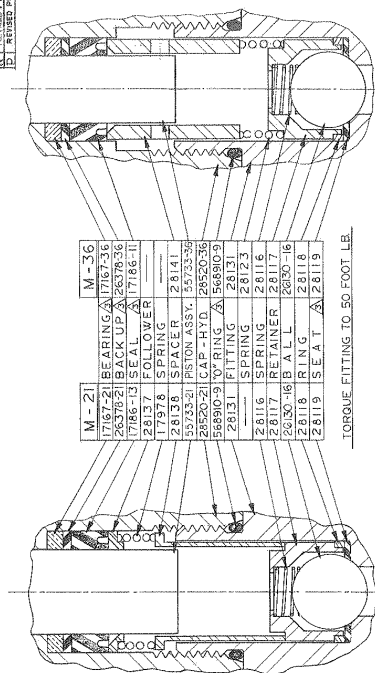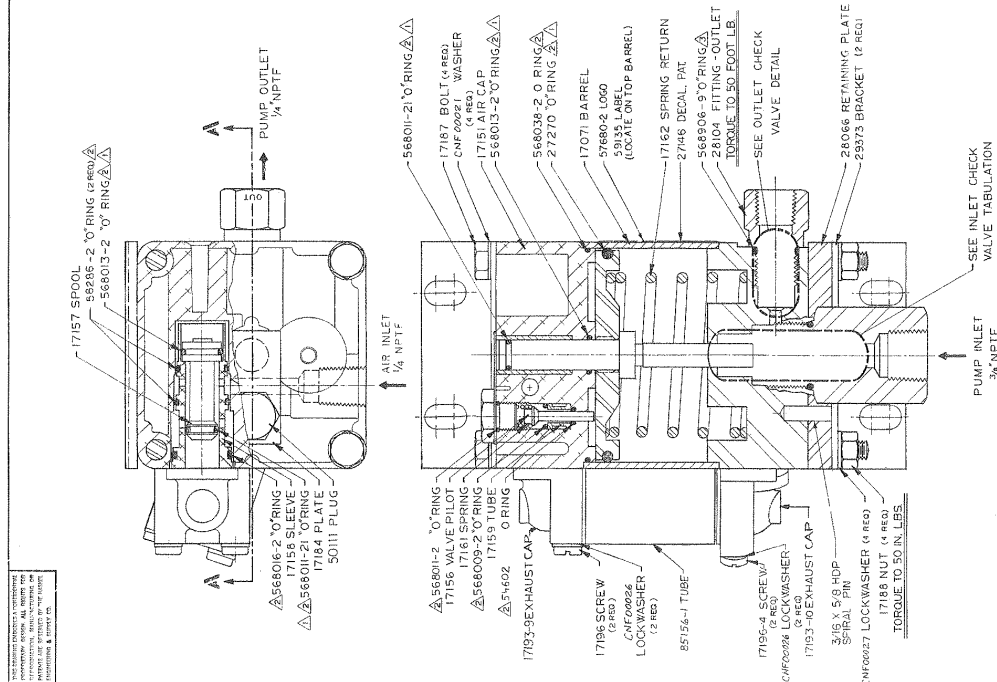

INLET CHECK VALVE M-21 AND M-36

INLET CHECK VALVE M-71, M-110 AND M-188.

TORQUE FITTING TO 125 FOOT LB.

|          |          |
|----------|----------|
| M - 21   | M - 36   |
| 71767-21 | 17167-36 |
| 26378-21 | 26378-36 |
| 71786-13 | 17186-11 |
| 28137    |          |
| 17978    |          |
|          |          |

|             | M - 71   | M - 110   | M - 188   |
|-------------|----------|-----------|-----------|
| BACKING     | 17167-71 | 17167-100 | 17167-188 |
| BRACK       | 26376-71 | 26378-100 | 26376-188 |
| S E A       | 17166-51 | 17166-8   | 17166-7   |
| S E A C E R | 28142    | 28143     | 28144     |
| ASTON ASSY. | 95733-71 | 95734-100 | 95733-188 |
| CAP - HYD.  | 26520-71 | 26520-100 | 26520-188 |
| FITTING     | 28136    | 28136     | 28136     |
| O'RING      | 56890-51 | 56890-100 | 56890-5   |
| SPRING      | 28062    | 24082     | 28062     |
| SPRING      | 26665    | 26665     | 26665     |
| SPRING      | 26665    | 26665     | 26665     |
| SHANK       | 26033-21 | 26033-2   | 26033-2   |
| B A L K     | 26030-1  | 26030-8   | 26030-8   |
| R I N G     | 28063-1  | 28063-1   | 28063-1   |
| S E A T     | 26081-1  | 26081-3   | 26081-3   |

| 1. NAME OF PERSONNEL  |                            | 2. NAME OF PROJECT          |                            |
|-----------------------|----------------------------|-----------------------------|----------------------------|
| 3. DATE OF ASSIGNMENT |                            | 4. NAME OF ASSIGNING AGENCY |                            |
| 5. DATE OF COMPLETION |                            | 6. NAME OF RECEIVING AGENCY |                            |
| 1                     | 1000 CASH (FOR FORT BAKER) | 2                           | 1000 CASH (FOR FORT BAKER) |
| 3                     | 1000 CASH (FOR FORT BAKER) | 4                           | 1000 CASH (FOR FORT BAKER) |
| 5                     | 1000 CASH (FOR FORT BAKER) | 6                           | 1000 CASH (FOR FORT BAKER) |
| 7                     | 1000 CASH (FOR FORT BAKER) | 8                           | 1000 CASH (FOR FORT BAKER) |
| 9                     | 1000 CASH (FOR FORT BAKER) | 10                          | 1000 CASH (FOR FORT BAKER) |
| 11                    | 1000 CASH (FOR FORT BAKER) | 12                          | 1000 CASH (FOR FORT BAKER) |
| 13                    | 1000 CASH (FOR FORT BAKER) | 14                          | 1000 CASH (FOR FORT BAKER) |
| 15                    | 1000 CASH (FOR FORT BAKER) | 16                          | 1000 CASH (FOR FORT BAKER) |
| 17                    | 1000 CASH (FOR FORT BAKER) | 18                          | 1000 CASH (FOR FORT BAKER) |
| 19                    | 1000 CASH (FOR FORT BAKER) | 20                          | 1000 CASH (FOR FORT BAKER) |
| 21                    | 1000 CASH (FOR FORT BAKER) | 22                          | 1000 CASH (FOR FORT BAKER) |
| 23                    | 1000 CASH (FOR FORT BAKER) | 24                          | 1000 CASH (FOR FORT BAKER) |
| 25                    | 1000 CASH (FOR FORT BAKER) | 26                          | 1000 CASH (FOR FORT BAKER) |
| 27                    | 1000 CASH (FOR FORT BAKER) | 28                          | 1000 CASH (FOR FORT BAKER) |
| 29                    | 1000 CASH (FOR FORT BAKER) | 30                          | 1000 CASH (FOR FORT BAKER) |
| 31                    | 1000 CASH (FOR FORT BAKER) | 32                          | 1000 CASH (FOR FORT BAKER) |
| 33                    | 1000 CASH (FOR FORT BAKER) | 34                          | 1000 CASH (FOR FORT BAKER) |
| 35                    | 1000 CASH (FOR FORT BAKER) | 36                          | 1000 CASH (FOR FORT BAKER) |
| 37                    | 1000 CASH (FOR FORT BAKER) | 38                          | 1000 CASH (FOR FORT BAKER) |
| 39                    | 1000 CASH (FOR FORT BAKER) | 40                          | 1000 CASH (FOR FORT BAKER) |
| 41                    | 1000 CASH (FOR FORT BAKER) | 42                          | 1000 CASH (FOR FORT BAKER) |
| 43                    | 1000 CASH (FOR FORT BAKER) | 44                          | 1000 CASH (FOR FORT BAKER) |
| 45                    | 1000 CASH (FOR FORT BAKER) | 46                          | 1000 CASH (FOR FORT BAKER) |
| 47                    | 1000 CASH (FOR FORT BAKER) | 48                          | 1000 CASH (FOR FORT BAKER) |
| 49                    | 1000 CASH (FOR FORT BAKER) | 50                          | 1000 CASH (FOR FORT BAKER) |
| 51                    | 1000 CASH (FOR FORT BAKER) | 52                          | 1000 CASH (FOR FORT BAKER) |
| 53                    | 1000 CASH (FOR FORT BAKER) | 54                          | 1000 CASH (FOR FORT BAKER) |
| 55                    | 1000 CASH (FOR FORT BAKER) | 56                          | 1000 CASH (FOR FORT BAKER) |
| 57                    | 1000 CASH (FOR FORT BAKER) | 58                          | 1000 CASH (FOR FORT BAKER) |
| 59                    | 1000 CASH (FOR FORT BAKER) | 60                          | 1000 CASH (FOR FORT BAKER) |
| 61                    | 1000 CASH (FOR FORT BAKER) | 62                          | 1000 CASH (FOR FORT BAKER) |
| 63                    | 1000 CASH (FOR FORT BAKER) | 64                          | 1000 CASH (FOR FORT BAKER) |
| 65                    | 1000 CASH (FOR FORT BAKER) | 66                          | 1000 CASH (FOR FORT BAKER) |
| 67                    | 1000 CASH (FOR FORT BAKER) | 68                          | 1000 CASH (FOR FORT BAKER) |
| 69                    | 1000 CASH (FOR FORT BAKER) | 70                          | 1000 CASH (FOR FORT BAKER) |
| 71                    | 1000 CASH (FOR FORT BAKER) | 72                          | 1000 CASH (FOR FORT BAKER) |
| 73                    | 1000 CASH (FOR FORT BAKER) | 74                          | 1000 CASH (FOR FORT BAKER) |
| 75                    | 1000 CASH (FOR FORT BAKER) | 76                          | 1000 CASH (FOR FORT BAKER) |
| 77                    | 1000 CASH (FOR FORT BAKER) | 78                          | 1000 CASH (FOR FORT BAKER) |
| 79                    | 1000 CASH (FOR FORT BAKER) | 80                          | 1000 CASH (FOR FORT BAKER) |
| 81                    | 1000 CASH (FOR FORT BAKER) | 82                          | 1000 CASH (FOR FORT BAKER) |
| 83                    | 1000 CASH (FOR FORT BAKER) | 84                          | 1000 CASH (FOR FORT BAKER) |
| 85                    | 1000 CASH (FOR FORT BAKER) | 86                          | 1000 CASH (FOR FORT BAKER) |
| 87                    | 1000 CASH (FOR FORT BAKER) | 88                          | 1000 CASH (FOR FORT BAKER) |
| 89                    | 1000 CASH (FOR FORT BAKER) | 90                          | 1000 CASH (FOR FORT BAKER) |
| 91                    | 1000 CASH (FOR FORT BAKER) | 92                          | 1000 CASH (FOR FORT BAKER) |
| 93                    | 1000 CASH (FOR FORT BAKER) | 94                          | 1000 CASH (FOR FORT BAKER) |
| 95                    | 1000 CASH (FOR FORT BAKER) | 96                          | 1000 CASH (FOR FORT BAKER) |
| 97                    | 1000 CASH (FOR FORT BAKER) | 98                          | 1000 CASH (FOR FORT BAKER) |
| 99                    | 1000 CASH (FOR FORT BAKER) | 100                         | 1000 CASH (FOR FORT BAKER) |

[illegible]

4. 55763-XX TOOL MAY BE USED TO INSTALL HYD SEAL.

THESE PARTS ARE INCLUDED IN 17179-XX

HYDRAULIC SECTION SEALS KIT.


THESE PARTS ARE INCLUDED IN THE KIT.

APPLY VERY LIGHT COATING OF LUBRICANT PER  
HPS-3.14 TO DYNAMIC SEALS IN AIR DRIVE SECTION.

NOTE:

| REVISIONS |          |
|-----------|----------|
| 1         | REVISION |
| 2         | REVISION |
| 3         | REVISION |
| 4         | REVISION |
| 5         | REVISION |
| 6         | REVISION |
| 7         | REVISION |
| 8         | REVISION |
| 9         | REVISION |
| 10        | REVISION |
| 11        | REVISION |
| 12        | REVISION |
| 13        | REVISION |
| 14        | REVISION |
| 15        | REVISION |
| 16        | REVISION |
| 17        | REVISION |
| 18        | REVISION |
| 19        | REVISION |
| 20        | REVISION |
| 21        | REVISION |
| 22        | REVISION |
| 23        | REVISION |
| 24        | REVISION |
| 25        | REVISION |
| 26        | REVISION |
| 27        | REVISION |
| 28        | REVISION |
| 29        | REVISION |
| 30        | REVISION |
| 31        | REVISION |
| 32        | REVISION |
| 33        | REVISION |
| 34        | REVISION |
| 35        | REVISION |
| 36        | REVISION |
| 37        | REVISION |
| 38        | REVISION |
| 39        | REVISION |
| 40        | REVISION |
| 41        | REVISION |
| 42        | REVISION |
| 43        | REVISION |
| 44        | REVISION |
| 45        | REVISION |
| 46        | REVISION |
| 47        | REVISION |
| 48        | REVISION |
| 49        | REVISION |
| 50        | REVISION |
| 51        | REVISION |
| 52        | REVISION |
| 53        | REVISION |
| 54        | REVISION |
| 55        | REVISION |
| 56        | REVISION |
| 57        | REVISION |
| 58        | REVISION |
| 59        | REVISION |
| 60        | REVISION |
| 61        | REVISION |
| 62        | REVISION |
| 63        | REVISION |
| 64        | REVISION |
| 65        | REVISION |
| 66        | REVISION |
| 67        | REVISION |
| 68        | REVISION |
| 69        | REVISION |
| 70        | REVISION |
| 71        | REVISION |
| 72        | REVISION |
| 73        | REVISION |
| 74        | REVISION |
| 75        | REVISION |
| 76        | REVISION |
| 77        | REVISION |
| 78        | REVISION |
| 79        | REVISION |
| 80        | REVISION |
| 81        | REVISION |
| 82        | REVISION |
| 83        | REVISION |
| 84        | REVISION |
| 85        | REVISION |
| 86        | REVISION |
| 87        | REVISION |
| 88        | REVISION |
| 89        | REVISION |
| 90        | REVISION |
| 91        | REVISION |
| 92        | REVISION |
| 93        | REVISION |
| 94        | REVISION |
| 95        | REVISION |
| 96        | REVISION |
| 97        | REVISION |
| 98        | REVISION |
| 99        | REVISION |
| 100       | REVISION |

# INLET CHECK VALVE M-50.

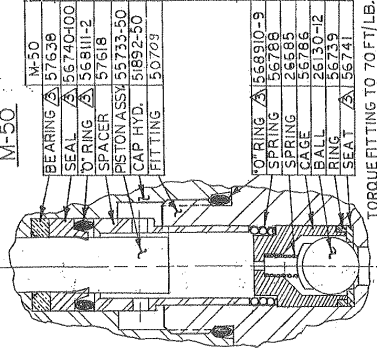

TORQUE FITTING TO 70 FT/LB.

|  |  |
|--|--|
| CONTRACT NO.<br>TITLE<br>MODEL "M" PUMP              |  |
| DRAWN BY<br>CHECKED BY<br>DESIGNED BY<br>APPROVED BY | DATE<br>SCALE<br>SHEET NO.<br>TOTAL SHEETS |



## **APPENDIX - III**

### **HC-1963 Hand Pump Parts List**





**Model: HC-1963  
2500 psi Hand Pump**

**\*\*\***

**Parts List  
With Illustrations**

10/2001 – Rev. OR



This pump is compatible with MIL-H-5606/MIL-H-83282 Hydraulic Fluids only.

#### INSTALLATION INSTRUCTIONS




1. Inspect all parts. Replace all worn or otherwise defective parts.
2. Clean all parts prior to re-assembly.
3. Lubricate all O-rings with clean system hydraulic fluid prior to installation.
4. Torque pump screws (Item 4) to 10 ft-lbs.

### Parts List

When ordering replacement parts/kits, please specify model, serial number and color of your unit.

| Item      | Part Number         | Description   | Qty |
|-----------|---------------------|---|-----|
| 4         | 518-000             | Screw, Socket Head Cap                              | 4   |
| 9         | Not Sold Separately | Pump Body   | 1   |
| 10        | H-2607              | Assembly, Relief Screw                              | 1   |
| 24        | 506-000             | Flange Half   | 4   |
| Not Shown | H-1009-01           | Handle  | 1   |
|           | <b>K-1068</b>       |   |     |
| 17        |                     | Bracket, Pump Handle                                | 1   |
| 18        |                     | Assembly, Clevis Pin                                | 1   |
| 19        |                     | Assembly, Linkage Pin                               | 2   |
| 20        |                     | Strap   | 2   |
| 23        |                     | Pivot   | 1   |
|           | <b>K-1778</b>       |   |     |
| 1         |                     | Retainer, Wiper                                     | 1   |
| 21        |                     | Tube  | 1   |
| 22        |                     | Piston  | 1   |
| 25        |                     | Assembly, Valve Body (Includes Items 7, 12, 25, 26) | 1   |
|           | <b>K-1906</b>       |   |     |
| 3         |                     | Ring, Backup  | 1   |
| 5         |                     | O-ring, Piston                                      | 1   |
| 22        |                     | Piston  | 1   |
|           | <b>K-3342</b>       |   |     |
| 12        |                     | Spring, Inlet Check                                 | 1   |
| 26        |                     | Ball, Inlet Check                                   | 2   |
| 28        |                     | Ball, Outlet Check                                  | 1   |
| 29        |                     | Spring, Outlet Check                                | 1   |
| 33        |                     | Spring, Inlet Check                                 | 1   |
|           | <b>K-3343</b>       | <b>Kit, Release Screw Replacement;</b> consists of: |     |
| 13        |                     | Screw, Release                                      | 1   |
| 14        |                     | Pin, Roll   | 1   |
| 15        |                     | Retainer, Screw                                     | 1   |
| 16        |                     | O-ring  | 1   |
|           | <b>K-3441</b>       | <b>Kit, Seal Replacement;</b> consists of:          |     |
| 2         |                     | Wiper, Rod  | 1   |
| 3         |                     | Ring, Backup  | 1   |
| 5         |                     | O-ring, Piston                                      | 1   |
| 6         |                     | O-ring, Valve Body                                  | 1   |
| 8         |                     | O-ring, Tube Seal                                   | 1   |
| 11        |                     | O-ring, Relief Screw                                | 1   |
| 16        |                     | O-ring, Release Screw                               | 1   |
| 27        |                     | O-ring, Outlet Check                                | 1   |
| 34        |                     | Ring, Backup Relief Screw                           | 1   |
| 35        |                     | O-ring, Relief Screw                                | 1   |

## Parts List Illustrations

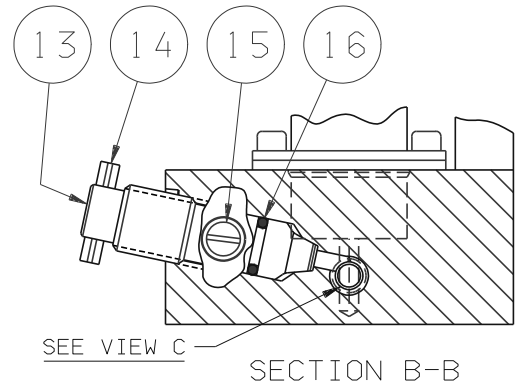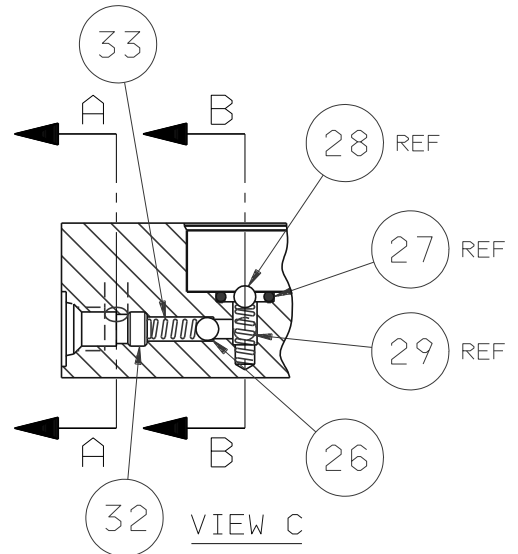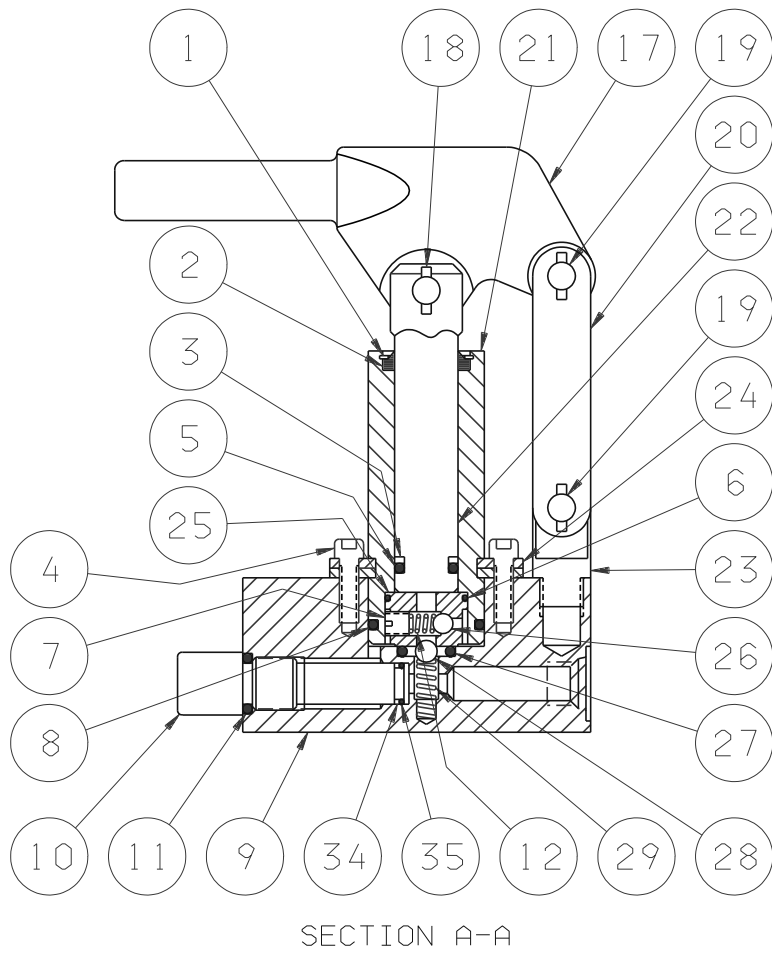

### WARNING!

Item 10 (H-2607) is a preset relief valve. Do Not disassemble this valve.

Replacement parts are available as a preset relief valve assembly



## **APPENDIX - IV**

### **Declaration of Conformity**





## DECLARATION of CONFORMITY

The design, development and manufacture is in accordance with European Community guidelines

Tripod Jack  
02A7898C0100-A1

Relevant provisions complied with by the machinery:  
2006/42/EC

Relevant standards complied with by the machinery:  
EN ISO 12100-1

Identification of person empowered to sign on behalf of the manufacturer:

A handwritten signature in black ink, reading "David L. Kidd". The signature is written in a cursive, flowing style. It is positioned above a solid horizontal line that spans the width of the signature.

Quality Assurance Representative





## **APPENDIX - V**

**Material Safety Data Sheet  
MIL-PRF-5606  
Hydraulic Fluid**



## MATERIAL SAFETY DATA SHEET

### SECTION 1 PRODUCT AND COMPANY IDENTIFICATION

#### PRODUCT

**Product Name:** MOBIL AERO HFA  
**Product Description:** Base Oil and Additives  
**Product Code:** 490110-00, 970584  
**Intended Use:** Aviation hydraulic oil

#### COMPANY IDENTIFICATION

**Supplier:** EXXON MOBIL CORPORATION  
3225 GALLOWES RD.  
FAIRFAX, VA. 22037 USA  
**24 Hour Health Emergency** 609-737-4411  
**Transportation Emergency Phone** 800-424-9300  
**ExxonMobil Transportation No.** 281-834-3296  
**MSDS Requests** 713-613-3661  
**Product Technical Information** 800-662-4525, 800-947-9147  
**MSDS Internet Address** <http://www.exxon.com>, <http://www.mobil.com>

### SECTION 2 COMPOSITION / INFORMATION ON INGREDIENTS

#### Reportable Hazardous Substance(s) or Complex Substance(s)

| Name   | CAS#       | Concentration* |
|--|------------|----------------|
| DISTILLATES (PETROLEUM), HYDROTREATED LIGHT          | 64742-47-8 | 10 - 30%       |
| HYDROTREATED LIGHT NAPHTHENIC DISTILLATE (PETROLEUM) | 64742-53-6 | 30 - 60%       |
| HYDROTREATED LIGHT PARAFFINIC DISTILLATES, PETROLEUM | 64742-55-8 | 10 - 30%       |

\* All concentrations are percent by weight unless material is a gas. Gas concentrations are in percent by volume.

### SECTION 3 HAZARDS IDENTIFICATION

This material is considered to be hazardous according to regulatory guidelines (see (M)SDS Section 15).

#### POTENTIAL PHYSICAL / CHEMICAL EFFECTS

Combustible. Material can release vapors that readily form flammable mixtures. Vapor accumulation could flash and/or explode if ignited.

#### POTENTIAL HEALTH EFFECTS

If swallowed, may be aspirated and cause lung damage. Frequent or prolonged contact may defat and dry the skin, leading to discomfort and dermatitis. May be irritating to the eyes, nose, throat, and lungs. High-pressure injection under skin may cause serious damage.

**Target Organs:** Skin |

**NFPA Hazard ID:** Health: 0 Flammability: 2 Reactivity: 0  
**HMIS Hazard ID:** Health: 0\* Flammability: 2 Reactivity: 0

**NOTE:** This material should not be used for any other purpose than the intended use in Section 1 without expert advice. Health studies have shown that chemical exposure may cause potential human health risks which may vary from person to person.

|                  |                           |
|------------------|---------------------------|
| <b>SECTION 4</b> | <b>FIRST AID MEASURES</b> |
|------------------|---------------------------|

**INHALATION**

Remove from further exposure. For those providing assistance, avoid exposure to yourself or others. Use adequate respiratory protection. If respiratory irritation, dizziness, nausea, or unconsciousness occurs, seek immediate medical assistance. If breathing has stopped, assist ventilation with a mechanical device or use mouth-to-mouth resuscitation.

**SKIN CONTACT**

Wash contact areas with soap and water. If product is injected into or under the skin, or into any part of the body, regardless of the appearance of the wound or its size, the individual should be evaluated immediately by a physician as a surgical emergency. Even though initial symptoms from high pressure injection may be minimal or absent, early surgical treatment within the first few hours may significantly reduce the ultimate extent of injury.

**EYE CONTACT**

Flush thoroughly with water. If irritation occurs, get medical assistance.

**INGESTION**

Seek immediate medical attention. Do not induce vomiting.

**NOTE TO PHYSICIAN**

If ingested, material may be aspirated into the lungs and cause chemical pneumonitis. Treat appropriately.

|                  |                               |
|------------------|-------------------------------|
| <b>SECTION 5</b> | <b>FIRE FIGHTING MEASURES</b> |
|------------------|-------------------------------|

**EXTINGUISHING MEDIA**

**Appropriate Extinguishing Media:** Use water fog, foam, dry chemical or carbon dioxide (CO<sub>2</sub>) to extinguish flames.

**Inappropriate Extinguishing Media:** Straight Streams of Water

**FIRE FIGHTING**

**Fire Fighting Instructions:** Evacuate area. Prevent runoff from fire control or dilution from entering streams, sewers, or drinking water supply. Firefighters should use standard protective equipment and in enclosed spaces, self-contained breathing apparatus (SCBA). Use water spray to cool fire exposed surfaces and to protect personnel.

**Unusual Fire Hazards:** Combustible. Pressurized mists may form a flammable mixture.

**Hazardous Combustion Products:** Smoke, Fume, Sulfur oxides, Aldehydes, Incomplete combustion products, Oxides of carbon, Phosphorus oxides

**FLAMMABILITY PROPERTIES**

**Flash Point (Method):** >82°C (180°F) [ASTM D-93]

**Flammable Limits (Approximate volume % in air):** LEL: 0.7 UEL: 7.0

**Autoignition Temperature:** >225°C (437°F)

|                  |                                    |
|------------------|------------------------------------|
| <b>SECTION 6</b> | <b>ACCIDENTAL RELEASE MEASURES</b> |
|------------------|------------------------------------|

#### **NOTIFICATION PROCEDURES**

In the event of a spill or accidental release, notify relevant authorities in accordance with all applicable regulations. U.S. regulations require reporting releases of this material to the environment which exceed the reportable quantity or oil spills which could reach any waterway including intermittent dry creeks. The National Response Center can be reached at (800)424-8802.

#### **PROTECTIVE MEASURES**

Avoid contact with spilled material. Warn or evacuate occupants in surrounding and downwind areas if required due to toxicity or flammability of the material. See Section 5 for fire fighting information. See Section 3 for Significant Hazards. See Section 4 for First Aid Advice. See Section 8 for Personal Protective Equipment.

#### **SPILL MANAGEMENT**

**Land Spill:** Eliminate all ignition sources (no smoking, flares, sparks or flames in immediate area). Stop leak if you can do it without risk. All equipment used when handling the product must be grounded. Do not touch or walk through spilled material. Prevent entry into waterways, sewer, basements or confined areas. A vapor suppressing foam may be used to reduce vapors. Use clean non-sparking tools to collect absorbed material. Absorb or cover with dry earth, sand or other non-combustible material and transfer to containers. Large Spills: Water spray may reduce vapor, but may not prevent ignition in closed spaces. Recover by pumping or with suitable absorbent.

**Water Spill:** Stop leak if you can do it without risk. Confine the spill immediately with booms. Warn other shipping. Remove from the surface by skimming or with suitable absorbents. Seek the advice of a specialist before using dispersants.

Water spill and land spill recommendations are based on the most likely spill scenario for this material; however, geographic conditions, wind, temperature, (and in the case of a water spill) wave and current direction and speed may greatly influence the appropriate action to be taken. For this reason, local experts should be consulted. Note: Local regulations may prescribe or limit action to be taken.

#### **ENVIRONMENTAL PRECAUTIONS**

Large Spills: Dike far ahead of liquid spill for later recovery and disposal. Prevent entry into waterways, sewers, basements or confined areas.

|                  |                             |
|------------------|-----------------------------|
| <b>SECTION 7</b> | <b>HANDLING AND STORAGE</b> |
|------------------|-----------------------------|

#### **HANDLING**

Avoid contact with skin. Avoid prolonged breathing of mists and heated vapor. Use proper bonding and/or grounding procedures. Prevent small spills and leakage to avoid slip hazard.

**Static Accumulator:** This material is a static accumulator.

#### **STORAGE**

Keep container closed. Handle containers with care. Open slowly in order to control possible pressure release. Store in a cool, well-ventilated area. Storage containers should be grounded and bonded. Drums must be grounded and bonded and equipped with self-closing valves, pressure vacuum bungs and flame arresters.

## SECTION 8 EXPOSURE CONTROLS / PERSONAL PROTECTION

### EXPOSURE LIMIT VALUES

**Exposure limits/standards (Note: Exposure limits are not additive)**

| Source   | Form | Limit / Standard |                        |         | Note | Source  |
|--|------|------------------|------------------------|---------|------|---------|
| HYDROTREATED LIGHT NAPHTHENIC DISTILLATE (PETROLEUM) |      | TWA              | 2000 mg/m <sup>3</sup> | 500 ppm | N/A  | OSHA Z1 |
| HYDROTREATED LIGHT NAPHTHENIC DISTILLATE (PETROLEUM) | Mist | STEL             | 10 mg/m <sup>3</sup>   |         | N/A  | ACGIH   |
| HYDROTREATED LIGHT NAPHTHENIC DISTILLATE (PETROLEUM) | Mist | TWA              | 5 mg/m <sup>3</sup>    |         | N/A  | ACGIH   |
| HYDROTREATED LIGHT PARAFFINIC DISTILLATES, PETROLEUM | Mist | STEL             | 10 mg/m <sup>3</sup>   |         | N/A  | ACGIH   |
| HYDROTREATED LIGHT PARAFFINIC DISTILLATES, PETROLEUM | Mist | TWA              | 5 mg/m <sup>3</sup>    |         | N/A  | ACGIH   |

**Exposure limits/standards for materials that can be formed when handling this product:** When mists / aerosols can occur, the following are recommended: 5 mg/m<sup>3</sup> - ACGIH TLV, 10 mg/m<sup>3</sup> - ACGIH STEL, 5 mg/m<sup>3</sup> - OSHA PEL.

NOTE: Limits/standards shown for guidance only. Follow applicable regulations.

### ENGINEERING CONTROLS

The level of protection and types of controls necessary will vary depending upon potential exposure conditions. Control measures to consider:  
Use explosion-proof ventilation equipment to stay below exposure limits.

### PERSONAL PROTECTION

Personal protective equipment selections vary based on potential exposure conditions such as applications, handling practices, concentration and ventilation. Information on the selection of protective equipment for use with this material, as provided below, is based upon intended, normal usage.

**Respiratory Protection:** If engineering controls do not maintain airborne contaminant concentrations at a level which is adequate to protect worker health, an approved respirator may be appropriate. Respirator selection, use, and maintenance must be in accordance with regulatory requirements, if applicable. Types of respirators to be considered for this material include:

No special requirements under ordinary conditions of use and with adequate ventilation.

For high airborne concentrations, use an approved supplied-air respirator, operated in positive pressure mode. Supplied air respirators with an escape bottle may be appropriate when oxygen levels are inadequate, gas/vapor warning properties are poor, or if air purifying filter capacity/rating may be exceeded.

**Hand Protection:** Any specific glove information provided is based on published literature and glove manufacturer data. Work conditions can greatly effect glove durability; inspect and replace worn or damaged gloves. The types of gloves to be considered for this material include:

If prolonged or repeated contact is likely, chemical resistant gloves are recommended. If contact with forearms is likely, wear gauntlet style gloves.

**Eye Protection:** If contact is likely, safety glasses with side shields are recommended.

**Skin and Body Protection:** Any specific clothing information provided is based on published literature or manufacturer data. The types of clothing to be considered for this material include:  
If prolonged or repeated contact is likely, chemical, and oil resistant clothing is recommended.

**Specific Hygiene Measures:** Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective equipment to remove contaminants. Discard contaminated clothing and footwear that cannot be cleaned. Practice good housekeeping.

## ENVIRONMENTAL CONTROLS

See Sections 6, 7, 12, 13.

## SECTION 9 PHYSICAL AND CHEMICAL PROPERTIES

Typical physical and chemical properties are given below. Consult the Supplier in Section 1 for additional data.

### GENERAL INFORMATION

**Physical State:** Liquid  
**Color:** Red  
**Odor:** Characteristic  
**Odor Threshold:** N/D

### IMPORTANT HEALTH, SAFETY, AND ENVIRONMENTAL INFORMATION

**Relative Density (at 15 C):** 0.88  
**Flash Point [Method]:** >82C (180F) [ASTM D-93]  
**Flammable Limits (Approximate volume % in air):** LEL: 0.7 UEL: 7.0  
**Autoignition Temperature:** >225°C (437°F)  
**Boiling Point / Range:** N/D  
**Vapor Density (Air = 1):** N/D  
**Vapor Pressure:** [N/D at 20 °C]  
**Evaporation Rate (n-butyl acetate = 1):** N/D  
**pH:** N/A  
**Log Pow (n-Octanol/Water Partition Coefficient):** N/D  
**Solubility in Water:** Negligible  
**Viscosity:** 13.8 cSt (13.8 mm<sup>2</sup>/sec) at 40 C | 5.1 cSt (5.1 mm<sup>2</sup>/sec) at 100C  
**Oxidizing Properties:** See Sections 3, 15, 16.

### OTHER INFORMATION

**Freezing Point:** N/D  
**Melting Point:** N/A  
**Pour Point:** -60°C (-76°F)  
**DMSO Extract (mineral oil only), IP-346:** < 3 %wt

|                   |                                 |
|-------------------|---------------------------------|
| <b>SECTION 10</b> | <b>STABILITY AND REACTIVITY</b> |
|-------------------|---------------------------------|

**STABILITY:** Material is stable under normal conditions.

**CONDITIONS TO AVOID:** Open flames and high energy ignition sources.

**MATERIALS TO AVOID:** Strong oxidizers

**HAZARDOUS DECOMPOSITION PRODUCTS:** Material does not decompose at ambient temperatures.

**HAZARDOUS POLYMERIZATION:** Will not occur.

|                   |                                  |
|-------------------|----------------------------------|
| <b>SECTION 11</b> | <b>TOXICOLOGICAL INFORMATION</b> |
|-------------------|----------------------------------|

**ACUTE TOXICITY**

| <u>Route of Exposure</u>             | <u>Conclusion / Remarks</u>  |
|--------------------------------------|--|
| <b>Inhalation</b>                    |  |
| Toxicity (Rat): LC50 > 5000 mg/m3    | Minimally Toxic. Based on assessment of the components.  |
| Irritation: No end point data.       | Elevated temperatures or mechanical action may form vapors, mist, or fumes which may be irritating to the eyes, nose, throat, or lungs. Based on assessment of the components. |
| <b>Ingestion</b>                     |  |
| Toxicity (Rat): LD50 > 2000 mg/kg    | Minimally Toxic. Based on test data for structurally similar materials.  |
| <b>Skin</b>                          |  |
| Toxicity (Rabbit): LD50 > 2000 mg/kg | Minimally Toxic. Based on test data for structurally similar materials.  |
| Irritation (Rabbit): Data available. | Negligible irritation to skin at ambient temperatures. Based on assessment of the components.  |
| <b>Eye</b>                           |  |
| Irritation (Rabbit): Data available. | May cause mild, short-lasting discomfort to eyes. Based on assessment of the components.   |

**CHRONIC/OTHER EFFECTS**

**For the product itself:**

Repeated and/or prolonged exposure may cause irritation to the skin, eyes, or respiratory tract. Small amounts of liquid aspirated into the lungs during ingestion or from vomiting may cause chemical pneumonitis or pulmonary edema.

**Contains:**

Base oil severely refined: Not carcinogenic in animal studies. Representative material passes IP-346, Modified Ames test, and/or other screening tests. Dermal and inhalation studies showed minimal effects; lung non-specific infiltration of immune cells, oil deposition and minimal granuloma formation. Not sensitizing in test animals.

Additional information is available by request.

**The following ingredients are cited on the lists below:** None.

--REGULATORY LISTS SEARCHED--

1 = NTP CARC  
2 = NTP SUS

3 = IARC 1  
4 = IARC 2A

5 = IARC 2B  
6 = OSHA CARC

Product Name: MOBIL DTE 11M  
Revision Date: 01 Sep 2009  
Page 7 of 10

---

Material -- Expected to be harmful to aquatic organisms. May cause long-term adverse effects in the aquatic environment.

## MOBILITY

Base oil component -- Low solubility and floats and is expected to migrate from water to the land. Expected to partition to sediment and wastewater solids.

## PERSISTENCE AND DEGRADABILITY

### Biodegradation:

Base oil component -- Expected to be inherently biodegradable

## BIOACCUMULATION POTENTIAL

Base oil component -- Has the potential to bioaccumulate, however metabolism or physical properties may reduce the bioconcentration or limit bioavailability.

|                   |                                |
|-------------------|--------------------------------|
| <b>SECTION 13</b> | <b>DISPOSAL CONSIDERATIONS</b> |
|-------------------|--------------------------------|

Disposal recommendations based on material as supplied. Disposal must be in accordance with current applicable laws and regulations, and material characteristics at time of disposal.

## DISPOSAL RECOMMENDATIONS

Product is suitable for burning in an enclosed controlled burner for fuel value or disposal by supervised incineration at very high temperatures to prevent formation of undesirable combustion products.

## REGULATORY DISPOSAL INFORMATION

RCRA Information: The unused product, in our opinion, is not specifically listed by the EPA as a hazardous waste (40 CFR, Part 261D), nor is it formulated to contain materials which are listed as hazardous wastes. It does not exhibit the hazardous characteristics of ignitability, corrosivity or reactivity and is not formulated with contaminants as determined by the Toxicity Characteristic Leaching Procedure (TCLP). However, used product may be regulated.

**Empty Container Warning** Empty Container Warning (where applicable): Empty containers may contain residue and can be dangerous. Do not attempt to refill or clean containers without proper instructions. Empty drums should be completely drained and safely stored until appropriately reconditioned or disposed. Empty containers should be taken for recycling, recovery, or disposal through suitably qualified or licensed contractor and in accordance with governmental regulations. DO NOT PRESSURISE, CUT, WELD, BRAZE, SOLDER, DRILL, GRIND, OR EXPOSE SUCH CONTAINERS TO HEAT, FLAME, SPARKS, STATIC ELECTRICITY, OR OTHER SOURCES OF IGNITION. THEY MAY EXPLODE AND CAUSE INJURY OR DEATH.

|                   |                              |
|-------------------|------------------------------|
| <b>SECTION 14</b> | <b>TRANSPORT INFORMATION</b> |
|-------------------|------------------------------|

**LAND (DOT) :** Not Regulated for Land Transport

**LAND (TDG) :** Not Regulated for Land Transport

**SEA (IMDG) :** Not Regulated for Sea Transport according to IMDG-Code

| SECTION 14 | TRANSPORT INFORMATION |
|------------|-----------------------|
|------------|-----------------------|

**LAND (DOT)**

**Proper Shipping Name:** COMBUSTIBLE LIQUID, N.O.S. (Distillates (Petroleum), Hydrotreated Light )  
**Hazard Class & Division:** COMBUSTIBLE LIQUID  
**ID Number:** NA1993  
**Packing Group:** III  
**ERG Number:** 128  
**Label(s):** NONE  
**Transport Document Name:** NA1993, COMBUSTIBLE LIQUID, N.O.S. (Distillates (Petroleum), Hydrotreated Light), COMBUSTIBLE LIQUID, PG III

Footnote: This material is not regulated under 49 CFR in a container of 119 gallon capacity or less when transported solely by land, as long as the material is not a hazardous waste, a marine pollutant, or specifically listed as a hazardous substance.

**LAND (TDG) :** Not Regulated for Land Transport

**SEA (IMDG) :** Not Regulated for Sea Transport according to IMDG-Code

**AIR (IATA) :** Not Regulated for Air Transport

| SECTION 15 | REGULATORY INFORMATION |
|------------|------------------------|
|------------|------------------------|

**OSHA HAZARD COMMUNICATION STANDARD:** When used for its intended purpose, this material is classified as hazardous in accordance with OSHA 29CFR 1910.1200.

**NATIONAL CHEMICAL INVENTORY LISTING:** AICS, IECSC, DSL, EINECS, ENCS, KECI, PICCS, TSCA

**EPCRA:** This material contains no extremely hazardous substances.

**SARA (311/312) REPORTABLE HAZARD CATEGORIES:** Fire. Delayed Health.

**SARA (313) TOXIC RELEASE INVENTORY:** This material contains no chemicals subject to the supplier notification requirements of the SARA 313 Toxic Release Program.

**The Following Ingredients are Cited on the Lists Below:**

| Chemical Name  | CAS Number | List Citations   |
|--|------------|------------------|
| DISTILLATES (PETROLEUM),<br>HYDROTREATED LIGHT             | 64742-47-8 | 17, 18, 19       |
| HYDROTREATED LIGHT<br>NAPHTHENIC DISTILLATE<br>(PETROLEUM) | 64742-53-6 | 1, 4, 13, 17, 18 |
| HYDROTREATED LIGHT<br>PARAFFINIC DISTILLATES,<br>PETROLEUM | 64742-55-8 | 1, 17, 18        |

--REGULATORY LISTS SEARCHED--

|               |                  |                   |             |
|---------------|------------------|-------------------|-------------|
| 1 = ACGIH ALL | 6 = TSCA5a2      | 11 = CA P65 REPRO | 16 = MN RTK |
| 2 = ACGIH A1  | 7 = TSCA5e       | 12 = CA RTK       | 17 = NJ RTK |
| 3 = ACGIH A2  | 8 = TSCA6        | 13 = IL RTK       | 18 = PA RTK |
| 4 = OSHA Z    | 9 = TSCA12b      | 14 = LA RTK       | 19 = RI RTK |
| 5 = TSCA 4    | 10 = CA P65 CARC | 15 = MI 293       |             |

Code key: CARC=Carcinogen; REPRO=Reproductive

|                   |                          |
|-------------------|--------------------------|
| <b>SECTION 16</b> | <b>OTHER INFORMATION</b> |
|-------------------|--------------------------|

N/D = Not determined, N/A = Not applicable

**THIS SAFETY DATA SHEET CONTAINS THE FOLLOWING REVISIONS:**

Revision Changes:

Section 05: Fire Fighting Measures - Unusual Fire Hazards was modified.  
Section 10: Conditions to Avoid was modified.  
Section 07: Handling and Storage - Handling was modified.  
Section 07: Handling and Storage - Storage Phrases was modified.  
Section 03: HMIS Flammability was modified.  
Section 03: NFPA Flammability was modified.  
Section 06: Accidental Release - Spill Management - Land was modified.  
Section 09: Flash Point C(F) was modified.  
Section 08: Exposure Control was modified.  
Section 15: SARA (311/312) REPORTABLE HAZARD CATEGORIES was modified.  
Section 16: Land Spill was modified.  
Section 14: DOT Technical Name - All was added.  
Section 03: Physical/Chemical Hazard was added.  
Section 14: Proper Shipping Name - Header was added.  
Section 14: Proper Shipping Name was added.  
Section 14: Hazard Class & Division - Header was added.  
Section 14: Hazard Class was added.  
Section 14: UN Number - Header was added.  
Section 14: UN Number was added.  
Section 14: Packing Group - Header was added.  
Section 14: Packing Group was added.  
Section 14: Label(s) - Header was added.  
Section 14: Label(s) was added.  
Section 14: ERG Number - Header was added.  
Section 14: ERG Number was added.  
Section 14: Transport Document Name - Header was added.  
Section 14: Transport Document Name was added.  
Section 14: DOT Technical Name - Open parenthesis was added.  
Section 14: DOT Technical Name - Close parenthesis was added.  
Section 03: Physical/Chemical Hazard was added.  
Section 03: Physical/Chemical Hazards - Header was added.  
Section 14: DOT Footnote was added.  
Section 16: Physical Hazards was added.  
Section 16: Physical Hazards - Header was added.  
Section 16: Precautions was added.  
Section 16: Precautions - Header was added.  
Section 10: Conditions to Avoid was deleted.  
Section 14: LAND (DOT) - Default was deleted.

**PRECAUTIONARY LABEL TEXT:**

**Contains:** DISTILLATES (PETROLEUM), HYDROTREATED LIGHT  
CAUTION!

**HEALTH HAZARDS**

Repeated exposure may cause skin dryness or cracking. If swallowed, may be aspirated and cause lung damage.

**Target Organs:** Skin |

**PHYSICAL HAZARDS**

Combustible.



## PRECAUTIONS

Use proper bonding and/or grounding procedures.

### FIRST AID

**Inhalation:** Remove from further exposure. For those providing assistance, avoid exposure to yourself or others. Use adequate respiratory protection. If respiratory irritation, dizziness, nausea, or unconsciousness occurs, seek immediate medical assistance. If breathing has stopped, assist ventilation with a mechanical device or use mouth-to-mouth resuscitation.

**Eye:** Flush thoroughly with water. If irritation occurs, get medical assistance.

**Oral:** Seek immediate medical attention. Do not induce vomiting. If ingested, material may be aspirated into the lungs and cause chemical pneumonitis. Treat appropriately.

**Skin:** Wash contact areas with soap and water. If product is injected into or under the skin, or into any part of the body, regardless of the appearance of the wound or its size, the individual should be evaluated immediately by a physician as a surgical emergency. Even though initial symptoms from high pressure injection may be minimal or absent, early surgical treatment within the first few hours may significantly reduce the ultimate extent of injury.

### FIRE FIGHTING MEDIA

Use water fog, foam, dry chemical or carbon dioxide (CO<sub>2</sub>) to extinguish flames.

### SPILL/LEAK

**Land Spill:** Eliminate all ignition sources (no smoking, flares, sparks or flames in immediate area). Stop leak if you can do it without risk. Prevent entry into waterways, sewer, basements or confined areas. A vapor suppressing foam may be used to reduce vapors. Absorb or cover with dry earth, sand or other non-combustible material and transfer to containers. Recover by pumping or with suitable absorbent.

**Water Spill:** Stop leak if you can do it without risk. Confine the spill immediately with booms. Warn other shipping. Remove from the surface by skimming or with suitable absorbents. Seek the advice of a specialist before using dispersants.

### Use

Not intended or suitable for use in or around a household or dwelling.

-----  
The information and recommendations contained herein are, to the best of ExxonMobil's knowledge and belief, accurate and reliable as of the date issued. You can contact ExxonMobil to insure that this document is the most current available from ExxonMobil. The information and recommendations are offered for the user's consideration and examination. It is the user's responsibility to satisfy itself that the product is suitable for the intended use. If buyer repackages this product, it is the user's responsibility to insure proper health, safety and other necessary information is included with and/or on the container. Appropriate warnings and safe-handling procedures should be provided to handlers and users. Alteration of this document is strictly prohibited. Except to the extent required by law, re-publication or retransmission of this document, in whole or in part, is not permitted. The term, "ExxonMobil" is used for convenience, and may include any one or more of ExxonMobil Chemical Company, Exxon Mobil Corporation, or any affiliates in which they directly or indirectly hold any interest.  
-----

Internal Use Only

MHC: 2A,0,0,0,0,1

PPEC: C

DGN: 2005454XUS (552975)

-----  
Copyright 2002 Exxon Mobil Corporation, All rights reserved