

**Model: 832R**  
**Three Stage Hydraulic**  
**Aviation Axle Jack**  
S/N 929 and Up

10/2021 – Rev. 02

REVISION	DATE	TEXT AFFECTED
01	06/2019	Original release
02	10/2021	Modified Parts List – Figure 5

## TABLE OF CONTENTS

	<u>PAGE</u>
<b>1.0 PRODUCT INFORMATION .....</b>	<b>1</b>
1.1 DESCRIPTION.....	1
1.2 MODEL & SERIAL NUMBER.....	1
1.3 MANUFACTURER .....	1
1.4 SPECIFICATIONS .....	1
1.5 PROTECTIVE DEVICES .....	1
<b>2.0 SAFETY INFORMATION.....</b>	<b>2</b>
2.1 USAGE AND SAFETY INFORMATION .....	2
<b>3.0 PREPARATION PRIOR TO FIRST USE .....</b>	<b>2</b>
<b>4.0 TRAINING .....</b>	<b>2</b>
4.1 TRAINING REQUIREMENTS .....	2
4.2 TRAINING PROGRAM .....	2
4.3 OPERATOR TRAINING .....	2
<b>5.0 OPERATION.....</b>	<b>3</b>
5.1 PRE OPERATION INSPECTION.....	3
5.2 OPERATING PROCEDURES.....	3
<b>6.0 TROUBLE SHOOTING .....</b>	<b>4</b>
<b>7.0 MAINTENANCE.....</b>	<b>5</b>
7.1 SERVICING .....	5
7.2 DISASSEMBLY INSPECTION .....	5
7.3 OVERHAUL INSTRUCTIONS.....	5
7.4 TESTING .....	6
<b>8.0 PROVISION OF SPARES.....</b>	<b>6</b>
8.1 SOURCE OF SPARE PARTS.....	6
8.2 SPECIAL TOOLS.....	6
8.3 RECOMMENDED SPARE PARTS LISTS .....	7
<b>9.0 IN SERVICE SUPPORT.....</b>	<b>8</b>
<b>10.0 GUARANTEES/LIMITATION OF LIABILITY .....</b>	<b>8</b>
<b>11.0 APPENDICES .....</b>	<b>8</b>

This product can not be modified without the written approval of Tronair, Inc. Any modifications done without written approval voids all warranties and releases Tronair, Inc., its suppliers, distributors, employees, or financial institutions from any liability from consequences that may occur. Only Tronair OEM replacement parts shall be used.



**CAUTION!**

**Aircraft manufacturer's specifications and instructions must be followed. In the event of contradiction between aircraft manufacturer's specifications and Malabar's, aircraft manufacturer's will prevail.**

**1.0 PRODUCT INFORMATION**

**1.1 DESCRIPTION**

The Malabar Axle Jack Model 832R is a 35 ton capacity three stage telescoping hydraulic jack designed primarily for use in jacking the main and/or nose landing gear of various aircraft. The jack consists of a three stage cylinder and base assembly, frame/reservoir assembly, valve block assembly, hand pump assembly and the following optional equipment:

- Air pump
- Air retract
- Load gauge
- Rain hat

The jack is mounted on two swivel casters at the rear and a spring loaded wheel at the front to provide portability. The cylinder assembly is raised off the ground by the spring loaded wheel when it is under no load. The wheel retracts and the base of the cylinder assembly rests on the ground when load is applied. A tow handle readily connects to tow vehicle for ease of transport. The jack is rated at 5 mph (8 km/h) towing speed. Excessive speed may cause excessive wear and/or damage to the jack.

**1.2 MODEL & SERIAL NUMBER**

Reference nameplate on unit

**1.3 MANUFACTURER**

**Malabar International**

1 Air Cargo Pkwy East  
Swanton, Ohio 43558 USA

Telephone: (419) 866-6301 or 800-426-6301

E-mail: [sales@malabar.com](mailto:sales@malabar.com)

Website: [www.malabar.com](http://www.malabar.com)

**1.4 SPECIFICATIONS**

Rated Capacity .....35 tons (31.8 m tons)  
Low Height.....7 in (178 mm)  
Hydraulic Lift.....12 in (305 mm)  
Extension Screw .....3 in (76 mm)  
Total Extended Height.....22 in (559 mm)  
Oil Pressure at Rated Capacity .....6770 psig (476 kg/sq cm)  
Safety Pop-off Valve set at.....38.5 ton (34.9 m tons)  
Proof Load.....52.5 ton (47.6 m tons)  
Floor Loading at Rated Capacity ....651 psi (46 kg/sq cm)  
Reservoir Capacity.....2 gal (7.6 l)  
Hydraulic Fluid .....MIL-PRF-5606 or equivalent  
Maximum Towing Speed.....5 mph (8 km/h)  
Approximate Jack Net Weight .....360 lbs (163 kg)

**1.5 PROTECTIVE DEVICES**

- A safety pop-off valve is incorporated in the jack (located in the valve block) to prevent lifting of loads in excess of 38.5 tons (34.9 m tons).
- The extension screw has a positive stop to prevent it from being extended beyond its safe thread engagement.
- An optional load gauge can be installed in order to monitor the approximate load being raised.

## 2.0 SAFETY INFORMATION

### 2.1 USAGE AND SAFETY INFORMATION

To insure safe operations please read the following statements and understand their meaning. Also refer to your equipment manufacturer's manual for other important safety information. This manual contains safety precautions which are explained below. Please read carefully.



#### **WARNING!**

Warning is used to indicate the presence of a hazard that can cause **severe personal injury, death, and/or substantial property damage** if the Warning Notice is ignored.



#### **CAUTION!**

Caution is used to indicate the presence of a hazard, which will or can cause **minor personal injury or property damage** if the Caution Notice is ignored.

## 3.0 PREPARATION PRIOR TO FIRST USE

1. The jack is shipped without hydraulic fluid in the reservoir. Do not operate air or hand pumps until reservoir is filled with hydraulic fluid MIL-PRF-5606 or approved equivalent. Remove filler cap and fill reservoir to mark on dipstick (reservoir capacity is approximately 2 gal/7.6 l). Plungers must be fully retracted before filling reservoir. Replace filler cap.
2. Open release valve and operate hand pumps a few strokes to bleed all air trapped under hand pumps.
3. Close release valve and operate hand pump to raise plungers approximately 1 inch.
4. Open release valve to retract plungers fully to bleed all air trapped under jack plungers. Close release valve.

## 4.0 TRAINING

### 4.1 TRAINING REQUIREMENTS

The employer of the operator is responsible for providing a training program sufficient for the safe operation of the unit.

### 4.2 TRAINING PROGRAM

The employer provided operator training program should cover safety procedures concerning use of the unit in and around the intended aircraft at the intended aircraft servicing location.

### 4.3 OPERATOR TRAINING

The operator training should provide the required training for safe operation of the unit.

**NOTE: Maintenance and Trouble Shooting are to be performed by a skilled and trained technician.**

## 5.0 OPERATION

### 5.1 PRE OPERATION INSPECTION

Each time the jack is to be used, inspect the following:

1. Check jack structure for rigidity. Make sure all bolts are tightened.
2. Check hydraulic line connections for leaks. Tighten as required.
3. Check for hydraulic fluid leaks around the cylinder assembly, reservoir, air pump and hand pumps.
4. Check hand pumps for proper operation.
5. Check caster wheels for proper operation.
6. Check reservoir fluid level with jack plungers fully retracted.

### 5.2 OPERATING PROCEDURES

1. Position the jack under the appropriate jacking pad of the aircraft.



#### CAUTION!

**Do not extend extension screw against aircraft jack pad with the plungers fully retracted.**

2. Raise the extension screw by turning counterclockwise until the ship adapter is 1/2" to 1" from aircraft jacking pad or as far as the screw will travel (3 inches maximum).
3. Close the release valve located in front of the frame/reservoir assembly.



#### CAUTION!

**On jack equipped with air pump, air relief valve must be installed at all times. If air relief valve is removed, it is possible to over pressurize the pneumatic system which could cause equipment failure and possible bodily injury.**

4. On jack equipped with air pump, connect air supply (90-125 psig) to the 1/4 NPT air inlet located near the air valve (A minimum of 17 scfm is required for the air pump). Air relief valve must be properly installed. Do not attempt to remove air relief valve.
5. The jack is equipped with two hand pumps. One with 3/4 inch diameter pump plunger for rapid raising of jack plungers under low pressure and one with 7/16 inch diameter pump plunger for high pressure operation. The hand pumps can be operated by placing pump handle over the end of the pump fulcrum and operating either the low or high pressure hand pump.
6. Operate air valve or either hand pump to raise plungers until the ship adapter contacts the jacking pad. Note: A small amount of fluid wetting is normal on manual hand pump plungers. Periodically clean to remove accumulated grease or foreign material.
7. Insure ship adapter and jacking pad are correctly mated.
8. To raise the load:
  - a. Operate the air valve or either hand pump as required.
  - b. Do not lift a load greater than the rated capacity of 35 tons (31.8 m. tons). The approximate load being lifted can be read in tons on the load gauge. Read load on lower stage scale when only outer plunger is extended. Read load on center stage scale when center plunger is extended. Read load on upper stage scale when inner plunger is extended. Fluid pressure in psig may be read on outer scale for gauge calibration.
9. To lower the load:
  - a. Slowly open the release valve to lower the load. The speed of lowering is controlled by the amount the release valve is open. Note: Do not open release valve more than one and one-half turns counter-clockwise.
10. Fully lower jack plungers. Lower extension screw. Close release valve. Cover jack when not in use

## 6.0 TROUBLE SHOOTING

TROUBLE	PROBABLE CAUSE	REMEDY
Jack will not raise	Release valve open (Oil passing back into reservoir)	Close valve firmly
	Intake valve open. (Oil passing back into reservoir)	Pump rapidly to flush dirt off
	Discharge valve open (Oil passing back into pump chamber)	Pump rapidly to flush dirt off
	Sticking intake valve	Remove pump from jack base. Unscrew valve block. Clean or replace valve
	Clogged screen	Remove and clean
	Lack of oil. Air under plunger	Refill. Check for leaks. Bleed air out by opening release valve. Pump rapidly a few times and close release valve
Jack will not raise to full height	Lack of oil	Refill, check for leaks
	Sticking intake valve	Remove pump from jack base. Unscrew valve block. Clean or replace ball valves. Re-tighten or repair
Jack will not raise capacity load	High pressure leaks (At pump or release valve)	Reseat valve
	Leaky release valve	Reseat valve and clean valve block
Jack raises and falls during each stroke	Leaky discharge valve	Tighten or replace ball valve or packing
Jack will not hold up load	Leaky release valve	Reseat valve
	Defective "O" ring and back up ring	Remove plunger and replace "O" ring and back up ring
Jack will not lower the load	Damaged release valve	Remove and replace parts as needed
	Bent plunger	Replace
Jack will not close completely	Air under plunger	Bleed air out. Open release valve and pump rapidly several times. Close valve
Handle stroke only partly effective	Air in pump chamber	Open release valve and pump rapidly several times. Close valve
	Sticking intake valve	Remove pump and clean valve block
	Clogged screen	Remove and clean
Handle raises without effort	Leaky intake valve	Remove pump and clean valve block
Handle snaps back	Sticking intake valve	Open release valve. Pump rapidly several times. Close valve
	Clogged screen	Remove and clean

## 7.0 MAINTENANCE

### 7.1 SERVICING

Servicing the jack consists primarily of the following:

1. When in use, the reservoir should be kept at the proper level with hydraulic fluid MIL-PRF-5606 or approved equivalent. Always check fluid level with jack plungers fully retracted.
2. Grease casters and wheel as required.
3. Lubricate hand pump pivot pins and tow handle linkage.
4. If the jack has been put into storage or has not been used, the plungers must be fully extended and retracted every 90 days to exercise the seals. A portion of the lift should be operated by the air pump and a portion by the hand pumps.

### 7.2 DISASSEMBLY INSPECTION



#### CAUTION!

**The safety pop-off valve, located in the valve block, should not be removed unless absolutely necessary. The valve is set to by-pass hydraulic fluid back to the reservoir at 4-6% above the rated capacity of 45 tons. If adjustment is required, see procedure in 7.4 Testing.**

When necessary to disassemble the jack, drain all hydraulic fluid from reservoir and carefully inspect the following:

1. Inspect interior walls of jack cylinder and hand pump cylinders for smoothness and freedom from rust, nicks, scratches and excessive wear.
2. Inspect exterior walls of jack plungers for smoothness and freedom from rust, pits and excessive wear.
3. Check extension screw, cylinder, plungers, etc., for corrosion, wear and condition of threads.
4. Verify that the extension screw has a positive stop to prevent it from being extended beyond its safe thread engagement.
5. Inspect packings, seals, gaskets and wipers in the cylinder assembly and hand pumps for cuts, scratches, deterioration and distortion.
6. Inspect stop rings for excessive scoring and/or wear.
7. Check hand pump oil screens by removing valve block and verifying cleanliness.
8. Inspect valves and valve seats in the valve block for scratches, dents and proper seating of the balls.
9. Inspect all pivot pins for wear, cracks, pits or evidence of damage or pending damage.
10. Inspect all areas for excessive dirt, oil, dust and chips.

### 7.3 OVERHAUL INSTRUCTIONS

No definite time schedule can be established for the overhaul of the jack for replacement of the various moving parts. The number of times the jack is raised and lowered and the amount of load raised at each operation materially affect the life of the working parts. Do not overload the jack. Overloading is dangerous, will hasten the need for overhaul and may damage the jack. During overhaul, replace all parts that do not pass disassembly inspection requirements. Regardless of apparent condition, replace all parts marked with (♦) in the parts breakdown. A repair parts kit (P/N 832RPK) which contains all of the parts marked with (♦) is available and recommended to keep on hand at your facility.

1. To disassemble cylinder assembly (see figure 2A):
  - a. Unscrew stop ring (item 2) from base.



#### CAUTION!

**Plungers are free to slide out of cylinder. Do not drop plungers and/or cylinder.**

- b. Remove plunger assembly from base.
- c. Remove snap ring (item 17) from center plunger (item 5).
- d. Push assembly out of outer plunger (item 4).
- e. Remove snap ring (item 16) from inner plunger (item 6).
- f. Push assembly out of center plunger.
- g. Loosen set screw (item 15)
- h. Remove extension screw (item 13) and extension screw nut (item 14) from inner plunger.
- i. Unscrew outer bearing (item 28) from outer plunger.
- j. Unscrew center bearing (item 27) from center plunger.
- k. Unscrew inner bearing (item 3) from inner plunger.
- l. Remove and discard all O-rings and back-up rings from plungers.
- m. To reassemble, install O-rings, back-up rings and bearings onto plungers. Lubricate all O-rings with MIL-H-5606 fluid or equivalent.
- n. Slide extension screw and extension screw nut into inner plunger and tighten set screw.
- o. Slide center plunger over inner plunger. Install snap ring to inner plunger.
- p. Slide outer plunger over center plunger. Install snap ring to center plunger.
- q. Slide plunger assembly into base.
- r. Screw stop ring into base.



**7.3 OVERHAUL INSTRUCTIONS** *(continued)*

2. When necessary to disassemble the jack:
  - a. Replace all defective parts.
  - b. Clean all metal parts with clean solvent and dry with compressed air.
  - c. Lubricate all threads. Use Teflon tape carefully on all pipe threads. Remove excess tape because it can clog valves and passages.
  - d. If ball valves, located in valve block, do not seat properly, they may be reseated by tapping the ball into the valve seat with a brass rod cupped at one end.

**7.4 TESTING**

Place jack in a load indicating test fixture. Make sure the test adapter is 3/4 inch male spherical radius. Operate hand pump to extend outer plunger fully and inner plungers partially. Make sure ship adapter and test adapter are correctly mated. Load test the jack at rated capacity of 35 tons. If the jack fails to operate properly, check for trouble as indicated in 6.0 Trouble Shooting. With plungers extended and supporting the capacity load, allow the jack to stand for 10 minutes. Any excess settling indicates leakage in the hand pump, check valves or jack packing seals. Check for hydraulic fluid leaks and replace all defective parts.

If adjustment is required for the safety pop-off valve, perform the following procedure:

1. Cut, remove and discard lead & wire seal (figure 3, item 38).
2. Remove plug (figure 3, item 35). Close release valve (figure 1, item 10).
3. Place jack in a load indicating test fixture. Make sure the test adapter is 3/4 inch male spherical radius. Operate hand pump to extend plungers against the test adapter. Make sure ship adapter and test adapter are correctly mated.
4. While operating the hand pump, adjust set screw (figure 3, item 29) until the safety pop-off valve by- passes hydraulic fluid back to the reservoir at 36.8 to 38.5 tons.
5. Replace plug (figure 3, item 35). Once more operate hand pump to verify correct setting.
6. Install new lead & wire seal (figure 3, item 38).
7. Open release valve to relieve pressure.

**8.0 PROVISION OF SPARES****8.1 SOURCE OF SPARE PARTS**

Spare parts may be obtained from the manufacturer:

**Malabar International**

1 Air Cargo Pkwy East  
Swanton, Ohio 43558 USA

Telephone: (419) 866-6301 or 800-426-6301

E-mail: [sales@malabar.com](mailto:sales@malabar.com)

Website: [www.malabar.com](http://www.malabar.com)

**8.2 SPECIAL TOOLS**

The following tools are necessary to disassemble/reassemble the cylinder assembly. These tools may be purchased upon request

Part Number	Description	Qty
83220	Spanner wrench, stop ring	1
730826	Spanner wrench, inner bearing	1
730827	Spanner wrench, center bearing	1
83221	Spanner wrench, outer bearing	1
83224	Lifting tool, extension screw	1

### 8.3 RECOMMENDED SPARE PARTS LISTS

The following spare parts are recommended and available upon request. Reference the following page(s) for Replacement Parts and Kits available.

Part Number	Description	Qty
832RPK	Repair parts kit	1
83282R	Swivel caster	2
83565	Wheel	1
86399E	Valve block and hand pump assembly	1
55001	Fulcrum	2
886659	Plunger, 7/16 dia	1
886658	Body, 7/16 di	1
886657	Plunger, 13/16 dia	1
886656	Body, 13/16 dia	1
86376	Pump handle	1
83295R	Hydraulic hose	1
83294R	Oil return line	1
86339	Breather cap & dipstick	1
83208R	Extension screw	1
83217R	Stop ring	1
83252R	Inner bearing	1
83232R	Center bearing	1
83212R	Outer bearing	1
55991-8	Placard, tonnage, 35 ton	1
55997-2	Nameplate	1
55998	Sticker, Malabar	1
55994	Sticker, fluid	1
75940	Sticker, towing	1
* 441-018	Air pump	1
* 441-037	Air drive seal kit, air pump	1
* 441-092	Hydraulic seal kit, air pump	1
* 421-006	Air valve	1
* 425-001	Air relief valve	1
* 83275	Load gauge	1
* 86367	Cross check valve	1

\* Optional equipment – These parts required only when supplied with jack

## 9.0 IN SERVICE SUPPORT

Contact Malabar, Inc. for technical services and information. See Section 1.3 – Manufacturer.


## 10.0 GUARANTEES/LIMITATION OF LIABILITY

- I. Seller warrants each new product of its manufacture to be free from defects in material or workmanship, under proper, reasonable, and normal use and service.
- II. The warranty period shall be as follows:
  - A. For Malabar equipment, with the exception of Tripod Jacks, the warranty period is one (1) year after date of shipment.
  - B. For Malabar Tripod Jacks, the warranty period is three (3) years after date of shipment.
- III. Where Buyer claims an alleged defect in material or workmanship and so advises Seller in writing within ten (10) days after discovery thereof, then and in such event, Buyer shall return said equipment, transportation prepaid, to the Seller, provided such return is timely and within the above-mentioned warranty period. This warranty and liability of the Seller is expressly limited solely to replacement or repair of defective parts or goods, and return at Buyer's expense to Buyer after finding by Seller the product was defective prior to original shipment or, at the option of Seller, to providing refund to Buyer of the purchase price for said product.
- IV. It is further expressly understood and agreed that:
  - A. THERE IS NO WARRANTY, REPRESENTATION OF CONDITION OF ANY KIND, EXPRESS OR IMPLIED, (INCLUDING NO WARRANTY OF MERCHANTABILITY OR OF FITNESS) EXCEPT THAT THE MATERIAL SHALL BE OF THE QUALITY SPECIFIED IN APPLICABLE SPECIFICATIONS, AND NONE SHALL BE IMPLIED BY LAW. Except as otherwise provided herein, quality shall be in accordance with Seller's specifications. Final determination of the material for the use contemplated by Buyer is the sole responsibility of Buyer and Seller shall have no responsibility in connection with such suitability, and
  - B. Buyer's sole and exclusive remedy shall be repair or replacement of defective parts or goods by the Seller. Should the goods, in the judgment of Seller, preclude the remedying of the warranted defects by repair or replacement, the Buyer's sole and exclusive remedy shall be the refund of the purchase price, and
  - C. Seller shall not be liable for prospective profits or special, indirect or consequential damages, nor shall any recovery of any kind against Seller be greater in amount than the purchase price of the specific material sold and causing the alleged loss, damage or injury. Buyer assumes all risk and liability for loss, damage or injury to persons or property of Buyer or others arising out of use or possession of any product or part sold hereunder, and
  - D. Seller shall in no way be deemed or held to be obligated, liable or accountable upon or for any guarantees or warranties, express or implied, or created by statute or by operation of law or otherwise, in any manner of form beyond its express agreement above set forth, and
  - E. No warranty herein shall apply to any product which shall have been repaired or altered, unless such alteration or repair has been made by Seller or if, after return to and inspection by Seller, the product is found by Seller to have been subject to misuse, negligence or accident, and
  - F. No warranty of any nature is made by Seller as to any component forming a part of the product sold and Buyer shall receive only such warranties offered by such other manufacturer of such component, and
  - G. Seller does not assume nor does Seller authorize any other person to assume for it any other liability or make any warranty in connection with the sale of its products.

## 11.0 APPENDICES

APPENDIX I Safety Data Sheet – MIL-PRF-5606 Hydraulic Fluid


## Pneumatic/Hydraulic Diagram

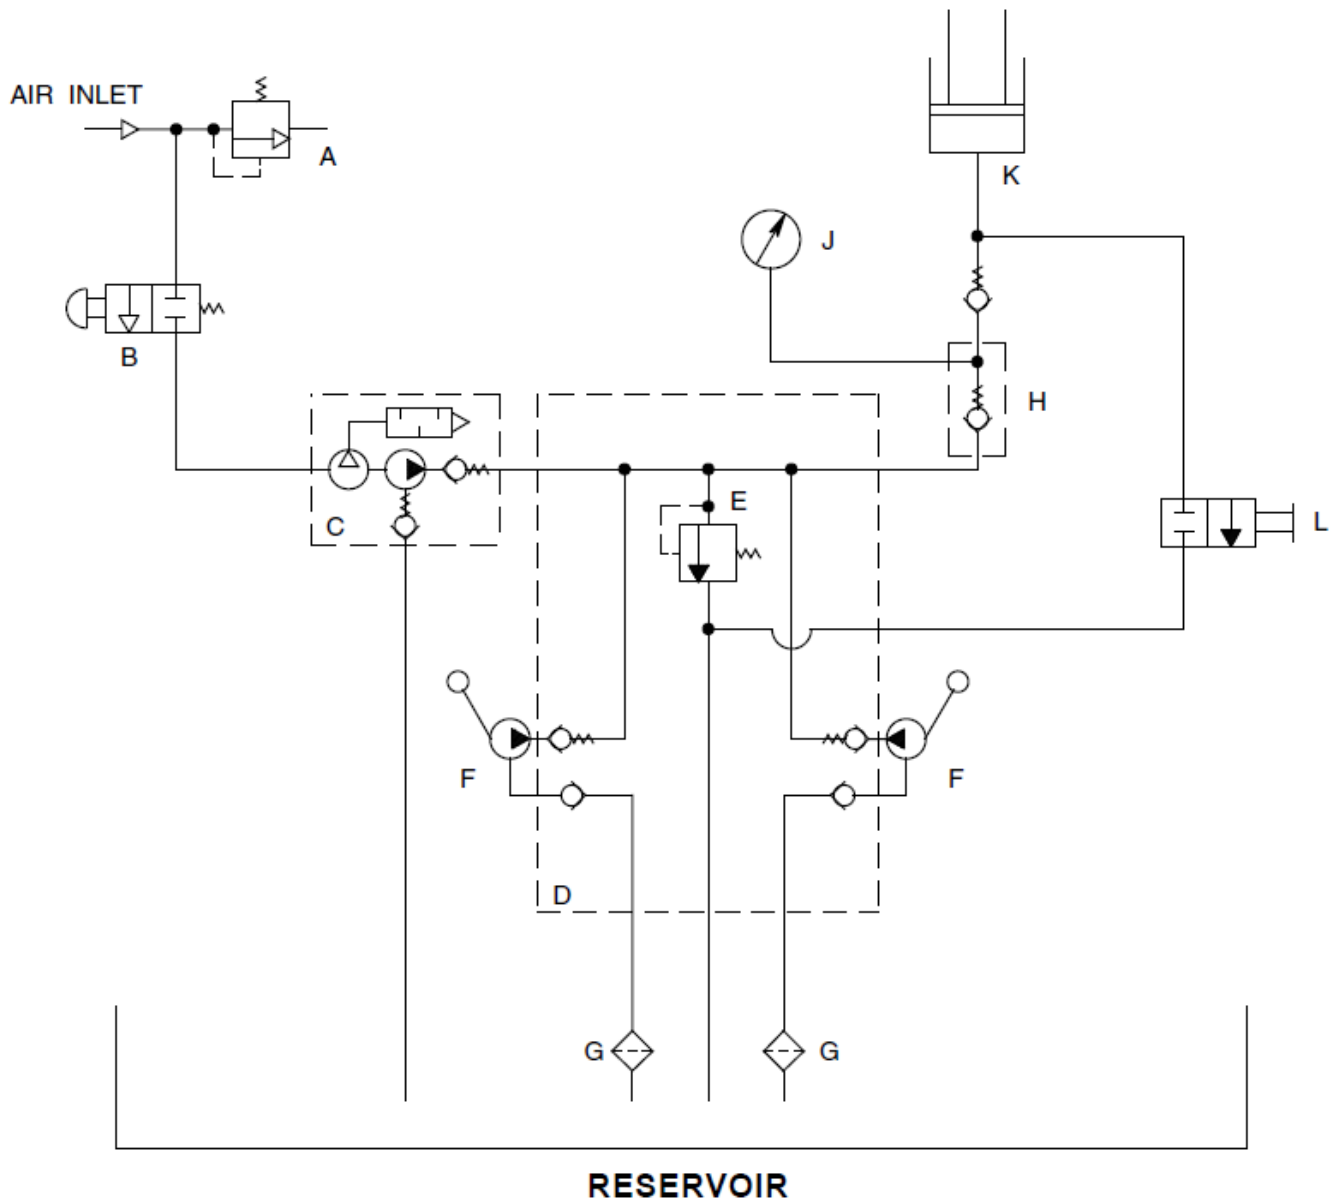

- A - AIR RELIEF VALVE
- B - AIR VALVE
- C - AIR PUMP
- D - VALVE BLOCK
- E - SAFETY POP-OFF VALVE
- F - HAND PUMP

- G - OIL SCREEN
- H - CROSS CHECK VALVE
- J - LOAD GAUGE
- K - CYLINDER ASSEMBLY
- L - RELEASE VALVE

**Pneumatic/Hydraulic Diagram**  
(WITH AIR OPERATED VACUUM RETRACT KIT)

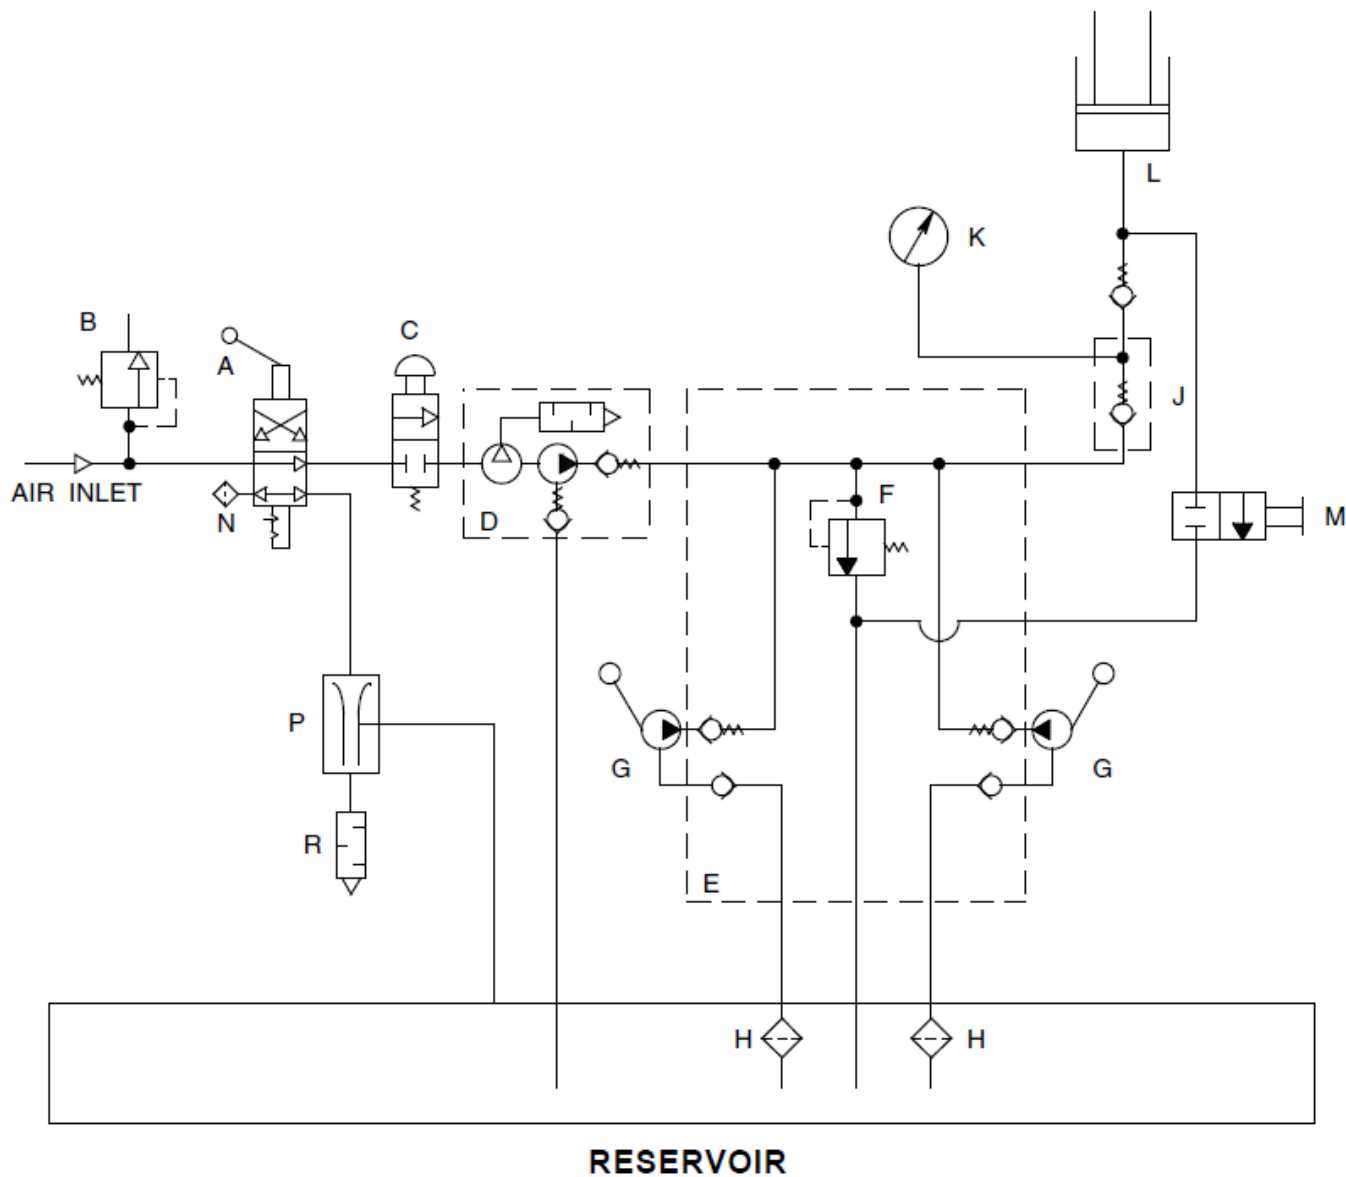


- A - FOUR WAY VALVE
- B - AIR RELIEF VALVE
- C - AIR VALVE
- D - AIR PUMP
- E - VALVE BLOCK
- F - SAFETY POP-OFF VALVE
- G - HAND PUMP
- H - OIL SCREEN

- J - CROSS CHECK VALVE
- K - LOAD GAUGE
- L - CYLINDER ASSEMBLY
- M - RELEASE VALVE
- N - FILTER/BREATHER
- P - VACUUM PUMP
- R - MUFFLER

## Parts List – Figure 1

When ordering replacement parts/kits, please specify model, serial number and color of your unit.

### ♦ PART OF REPAIR PARTS KIT

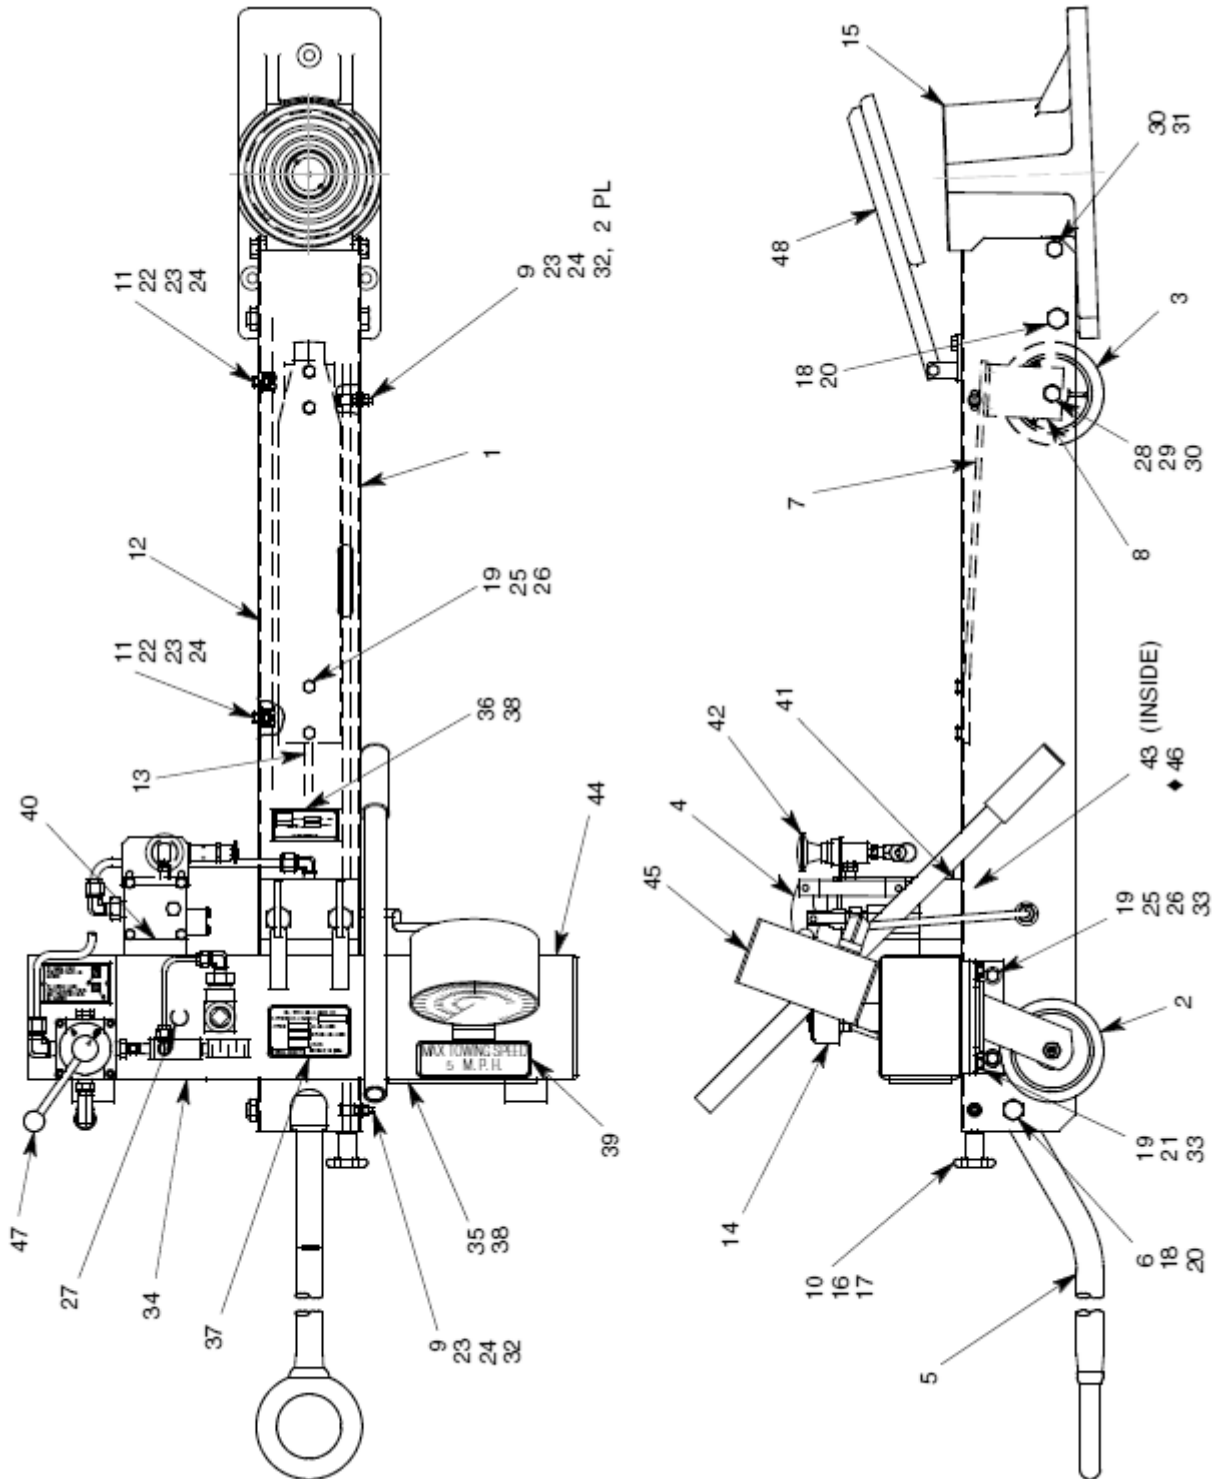

## Parts List – Figure 1

When ordering replacement parts/kits, please specify model, serial number and color of your unit.

Item	Part Number	Description	Qty
1	80215	FRAME	1
2	83282R	SWIVEL CASTER	2
3	83565	WHEEL	1
4	86399E	VALVE BLOCK & HAND PUMP	1
5	80204	TOW HANDLE	1
6	80205	TOW HANDLE SPACER	1
7	80208	LEAF SPRING	1
8	80207	WHEEL BRACKET	1
9	80206	SHAFT GUIDE	2
10	83597	KNOB	1
11	394-003	PIPE CLIP	2
12	83295R	HOSE ASSEMBLY	1
13	83294R	OIL RETURN LINE	1
14	86339	BREATHER CAP & DIPSTICK	1
15	83298	CYLINDER ASSEMBLY	1
16	83596	SHAFT ASSEMBLY	1
17	331-011	SHSS, 1/4-20 x 1/4 LG	1
18	321-021	HHCS, 5/8-11 x 5 1/2 LG	2
19	363-003	SPLIT LOCKWASHER, 3/8	16
20	355-009	HEX LOCKNUT, THIN, 5/8-11	2
21	321-042	HHCS, 3/8-16 x 3/4 LG	8
22	321-036	HHCS, 1/4-20 x 3/4 LG	2
23	363-001	SPLIT LOCKWASHER, 1/4	4
24	351-001	HEX NUT, 1/4-20	4
25	321-011	HHCS, 3/8-16 x 1" LG	8
26	351-002	HEX NUT, 3/8-16	8
27	717-007	PIPE PLUG, 3/8 NPT	1
28	321-039	HHCS, 1/2-13 x 3" LG	1
29	351-003	HEX NUT, 1/2-13	1
30	363-004	SPLIT LOCKWASHER, 1/2	3
31	321-072	HHCS, 1/2-20 x 1" LG	2
32	362-001	FLAT WASHER, 1/4 SAE	3
33	362-003	FLAT WASHER, 3/8 SAE	12
34	55998	STICKER, MALABAR	1
35	55991-8	PLACARD, TONNAGE, 35 TON	1
36	55997-2	NAMEPLATE	1
37	55994	STICKER, FLUID	1
38	397-005	SELF TAPPING SCREW, #4	8
39	75940	STICKER, TOWING	1
40	717-006	PLUG, 1/4 NPT	1
41	717-035	PLUG, HEX, 1/4 NPT	1
42	80218	AIR PUMP KIT	1

### Parts List – Figure 1

When ordering replacement parts/kits, please specify model, serial number and color of your unit.


Item	Part Number	Description	Qty
43	722-007	ELBOW, 45°, 3/8 37° x 3/8 SAE	1
44	80216	RESERVOIR	1
45	83219	LOAD GAUGE KIT	1
46	MS28778-6	O-RING (PART OF ITEM 43)	1
47	83260	AIR RETRACT KIT	1
48	83247	RAIN HAT KIT	1



## Parts List – Figure 2A

When ordering replacement parts/kits, please specify model, serial number and color of your unit.


### ♦ PART OF REPAIR PARTS KIT

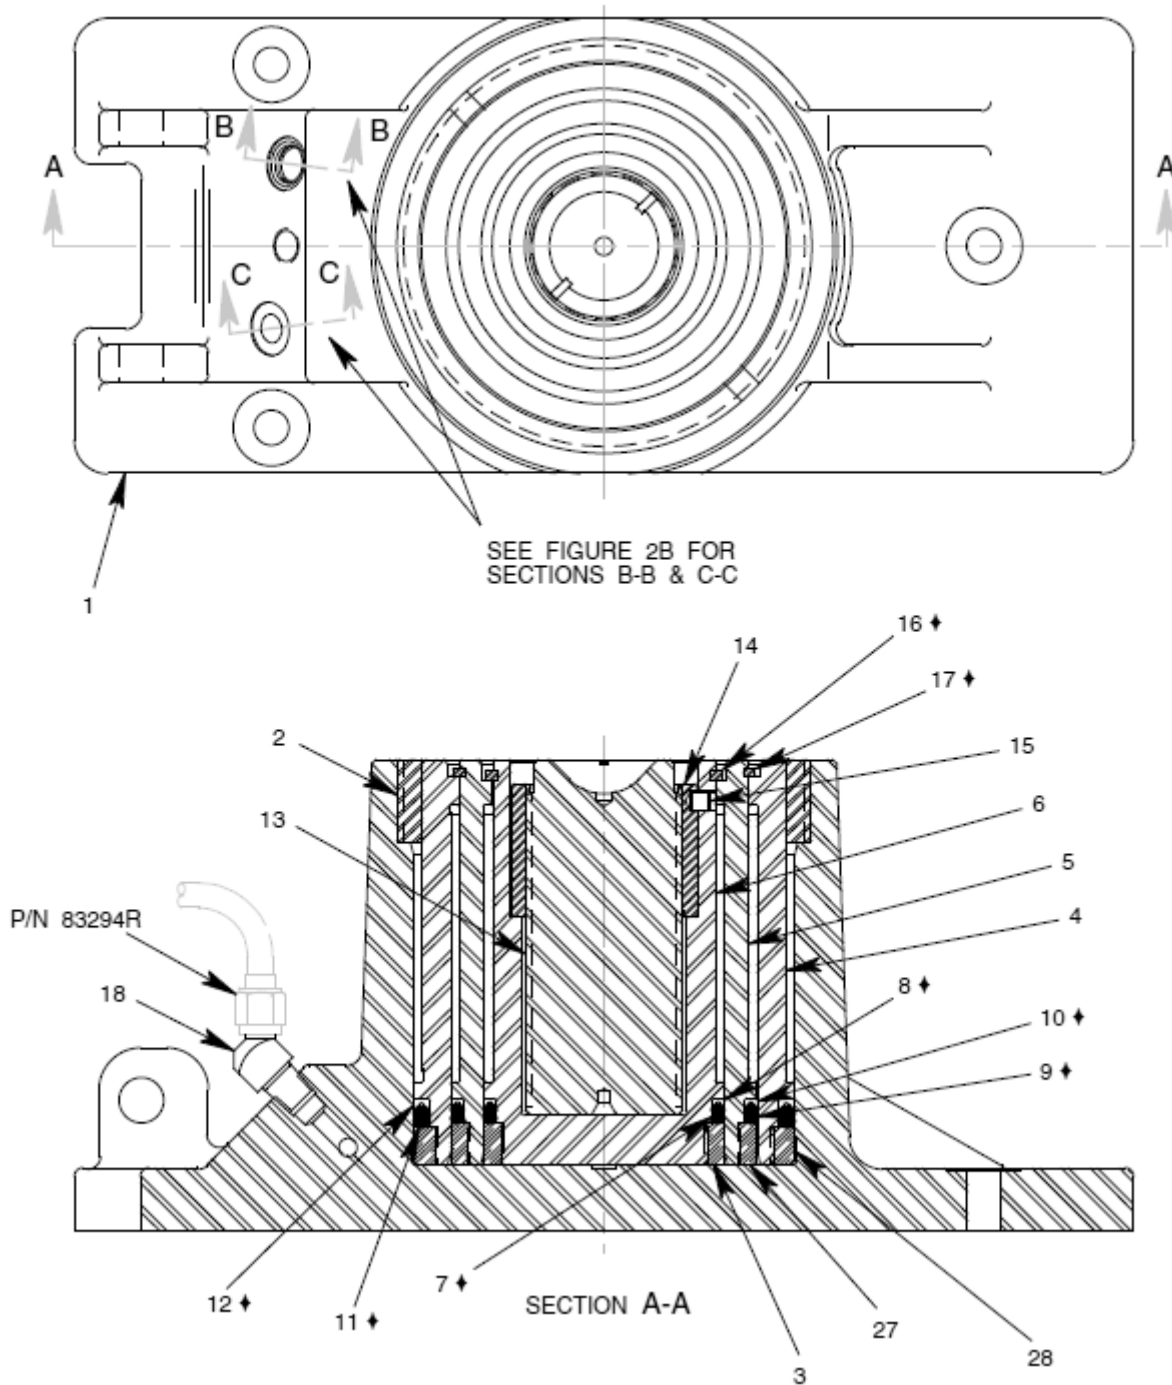

### Parts List – Figure 2A

When ordering replacement parts/kits, please specify model, serial number and color of your unit.

◆ PART OF REPAIR PARTS KIT

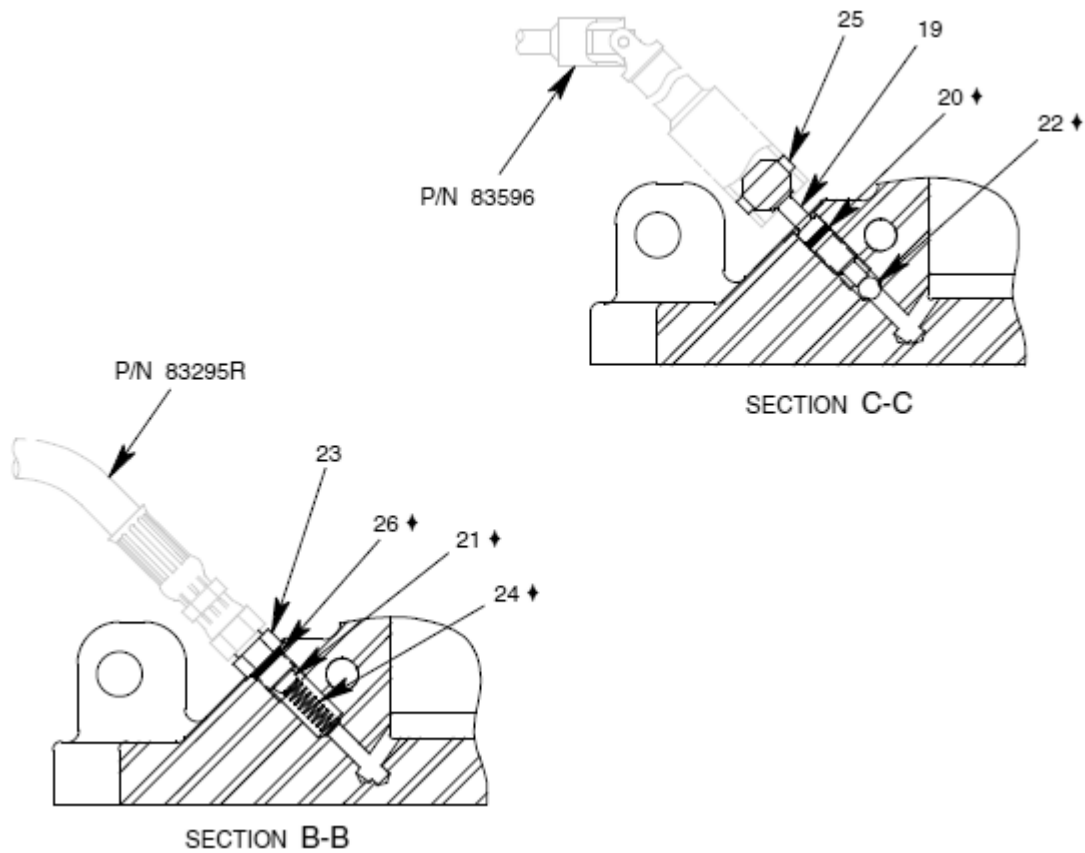

## Parts List – Figure 2


When ordering replacement parts/kits, please specify model, serial number and color of your unit.

Item	Part Number	Description	Qty
	<b>83298</b>	<b>Cylinder Assembly; consists of:</b>	
1	83207R	BASE	1
2	83217R	STOP RING	1
3	83252R	INNER BEARING	1
4	83210R	OUTER PLUNGER	1
5	83230R	CENTER PLUNGER	1
6	83250R	INNER PLUNGER	1
7	55925-339	O-RING	1
8	55902-42	BACKUP RING	1
9	55925-347	O-RING	1
10	55902-50	BACKUP RING	1
11	55925-431	O-RING	1
12	55903-58	BACKUP RING	1
13	83208R	EXTENSION SCREW	1
14	83209R	EXTENSION SCREW NUT	1
15	331-004	SHSS, 5/16-24 x 5/16 LG	1
16	83214R	SNAP RING	1
17	83234R	SNAP RING	1
18	722-009	ELBOW, 45°, 3/8 37° x 1/4 NPT	1
19	101	STEM	1
20	55925-011	O-RING	1
21	412-001	CHROME STEEL BALL, 3/8	1
22	412-002	CHROME STEEL BALL, 5/16	1
23	83514	FITTING, 3/8 37° x 3/8 SAE	1
24	83515	SPRING	1
25	390-001	DRIVE PIN	1
26	MS28778-6	O-RING (PART OF ITEM 23)	1
27	83232R	CENTER BEARING	1
28	83212R	OUTER BEARING	1

### Parts List – Figure 3

When ordering replacement parts/kits, please specify model, serial number and color of your unit.

◆ PART OF REPAIR PARTS KIT

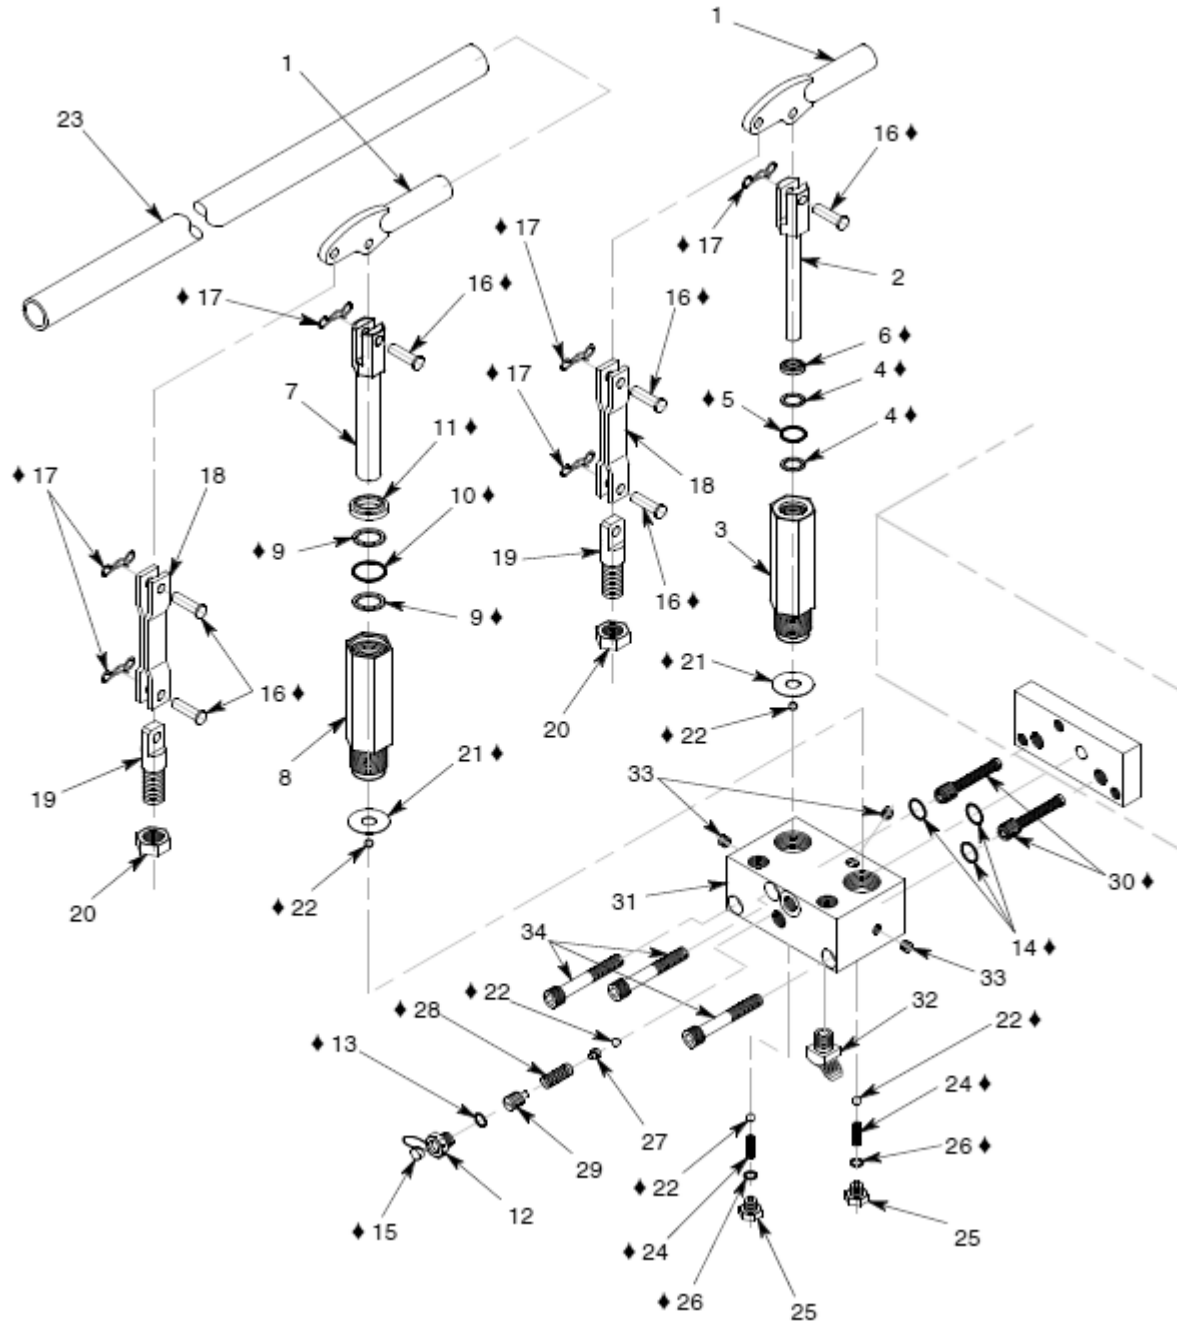

### Parts List – Figure 3


When ordering replacement parts/kits, please specify model, serial number and color of your unit.

Item	Part Number	Description	Qty
	<b>86399E</b>	<b>Valve Block &amp; Hand Pump Assembly; consists of:</b>	
1	55001	FULCRUM	2
2	886659	PLUNGER, 7/16 DIA	1
3	886658	BODY, 7/16 DIA	1
4	55922-9	BACK-UP RING	2
5	55925-111	O-RING	1
6	755-018	WIPER	1
7	886657	PLUNGER, 13/16 DIA	1
8	886656	BODY, 13/16 DIA	1
9	55922-16	BACK-UP RING	2
10	55925-211	O-RING	1
11	755-019	WIPER	1
12	717-046	PLUG	1
13	55925-904	O-RING	1
14	55925-113	O-RING	3
15	390-022	LEAD & WIRE SEAL	1
16	55002	FLAT HEAD PIN, 5/16 DIA	6
17	372-028	BOW TIE COTTER	6
18	55615	LINK	2
19	55011	ANCHOR	2
20	352-004	HEX JAM NUT, 5/8-18	2
21	55024	GASKET	2
22	412-004	STEEL BALL, 1/4 DIA	5
23	86376	PUMP HANDLE	1
24	55621	SPRING	2
25	55620	PLUG	2
26	55925-903	O-RING	2
27	55153	GUIDE	1
28	55154H	SPRING	1
29	55148	SET SCREW	1
30	55568	OIL SCREEN	2
31	85425	VALVE BLOCK	1
32	722-009	ELBOW, 45°, 3/8 37° x 1/4 MPT	1
33	717-010	PLUG, HEX SOC, 1/16 NPT	1
34	323-009	SHCS, 3/8-24 x 3" LG	4

### Parts List – Figure 4

When ordering replacement parts/kits, please specify model, serial number and color of your unit.

◆ PART OF REPAIR PARTS KIT

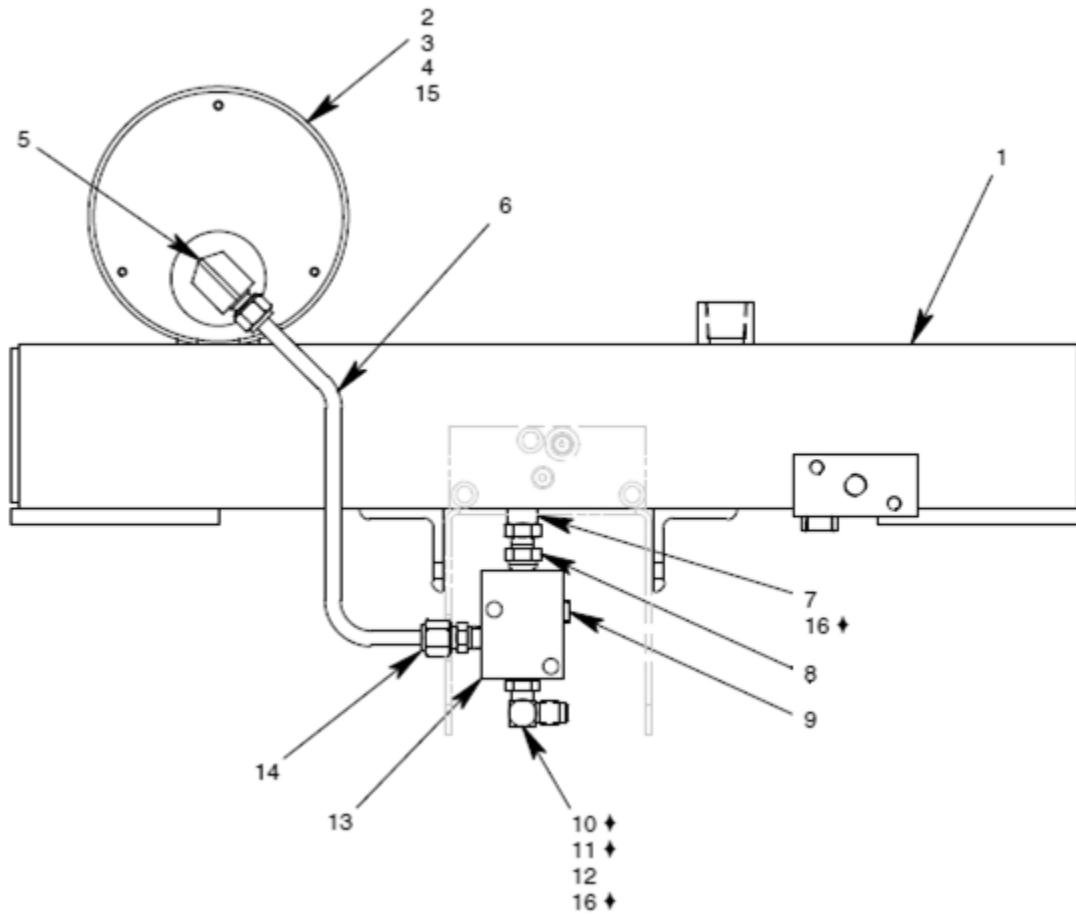


Item	Part Number	Description	Qty
	<b>83219</b>	<b>Load Gauge Kit; consists of:</b>	
1	80209	RESERVOIR W/ GAUGE MOUNT	1
2	83275	GAUGE	1
3	323-073	SHCS (MARSH GAUGE)	3
4	363-009	SPLIT LOCKWASHER, #10	3
5	722-025	ELBOW, 3/8 T x 1/2 FPT	1
6	732-010	TUBE, 3/8 O.D. x .065 WALL	1
7	751-001	ADAPTER, 3/8 SAE x 1/4 FPT	1
8	711-018	NIPPLE, 3/8 MPT x 1/4 MPT	1
9	717-006	PLUG, 1/4 MPT	1
10	412-001	BALL, 3/8 DIA	1
11	79367	SPRING	1
12	722-003	ELBOW, 3/8 SAE x 3/8	1
13	86367	CROSS CHECK VALVE	1
14	721-009	CONN., 3/8 T x 1/4 MPT	1
15	323-071	SHCS, (ASHCROFT GAUGE)	3
16	MS28778-6	O-RING (FOR ITEMS 7 & 12)	2

## Parts List – Figure 5

When ordering replacement parts/kits, please specify model, serial number and color of your unit.


### ◆ PART OF REPAIR PARTS KIT

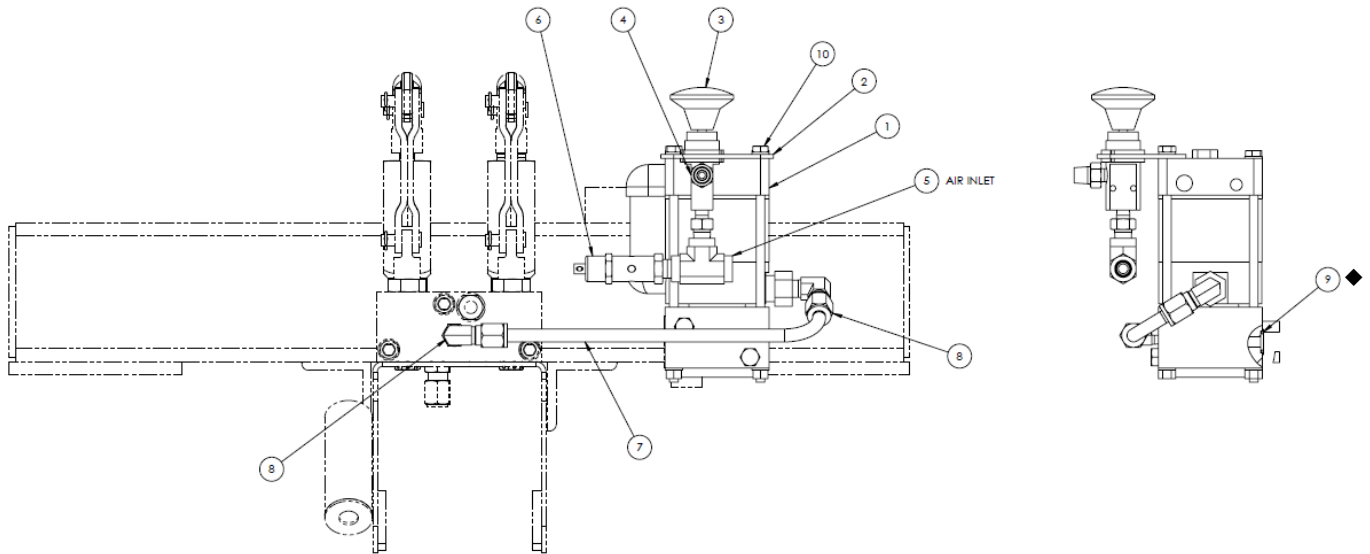

Item	Part Number	Description	Qty
	<b>80218</b>	<b>Air Pump Kit; consists of:</b>	
1	441-018	AIR PUMP	1
2	72585	MOUNT PLATE	1
3	421-006	VALVE	1
4	711-024	NIPPLE, 1/4 MPT x 1/8 MPT	2
5	713-013	TEE, 1/4 FPT	1
6	425-001	AIR RELIEF VALVE	1
7	732-010	TUBE, 3/8 O.D. x .065 WALL	1
8	722-014	ELBOW, 3/8 T x 1/4 MPT	2
9	55925-016	O-RING	1
10	G-1100-105064	BOLT, 1/4-20 X 6-1/2 LG HEX HD GR 5	2

### Parts List – Figure 6

When ordering replacement parts/kits, please specify model, serial number and color of your unit.

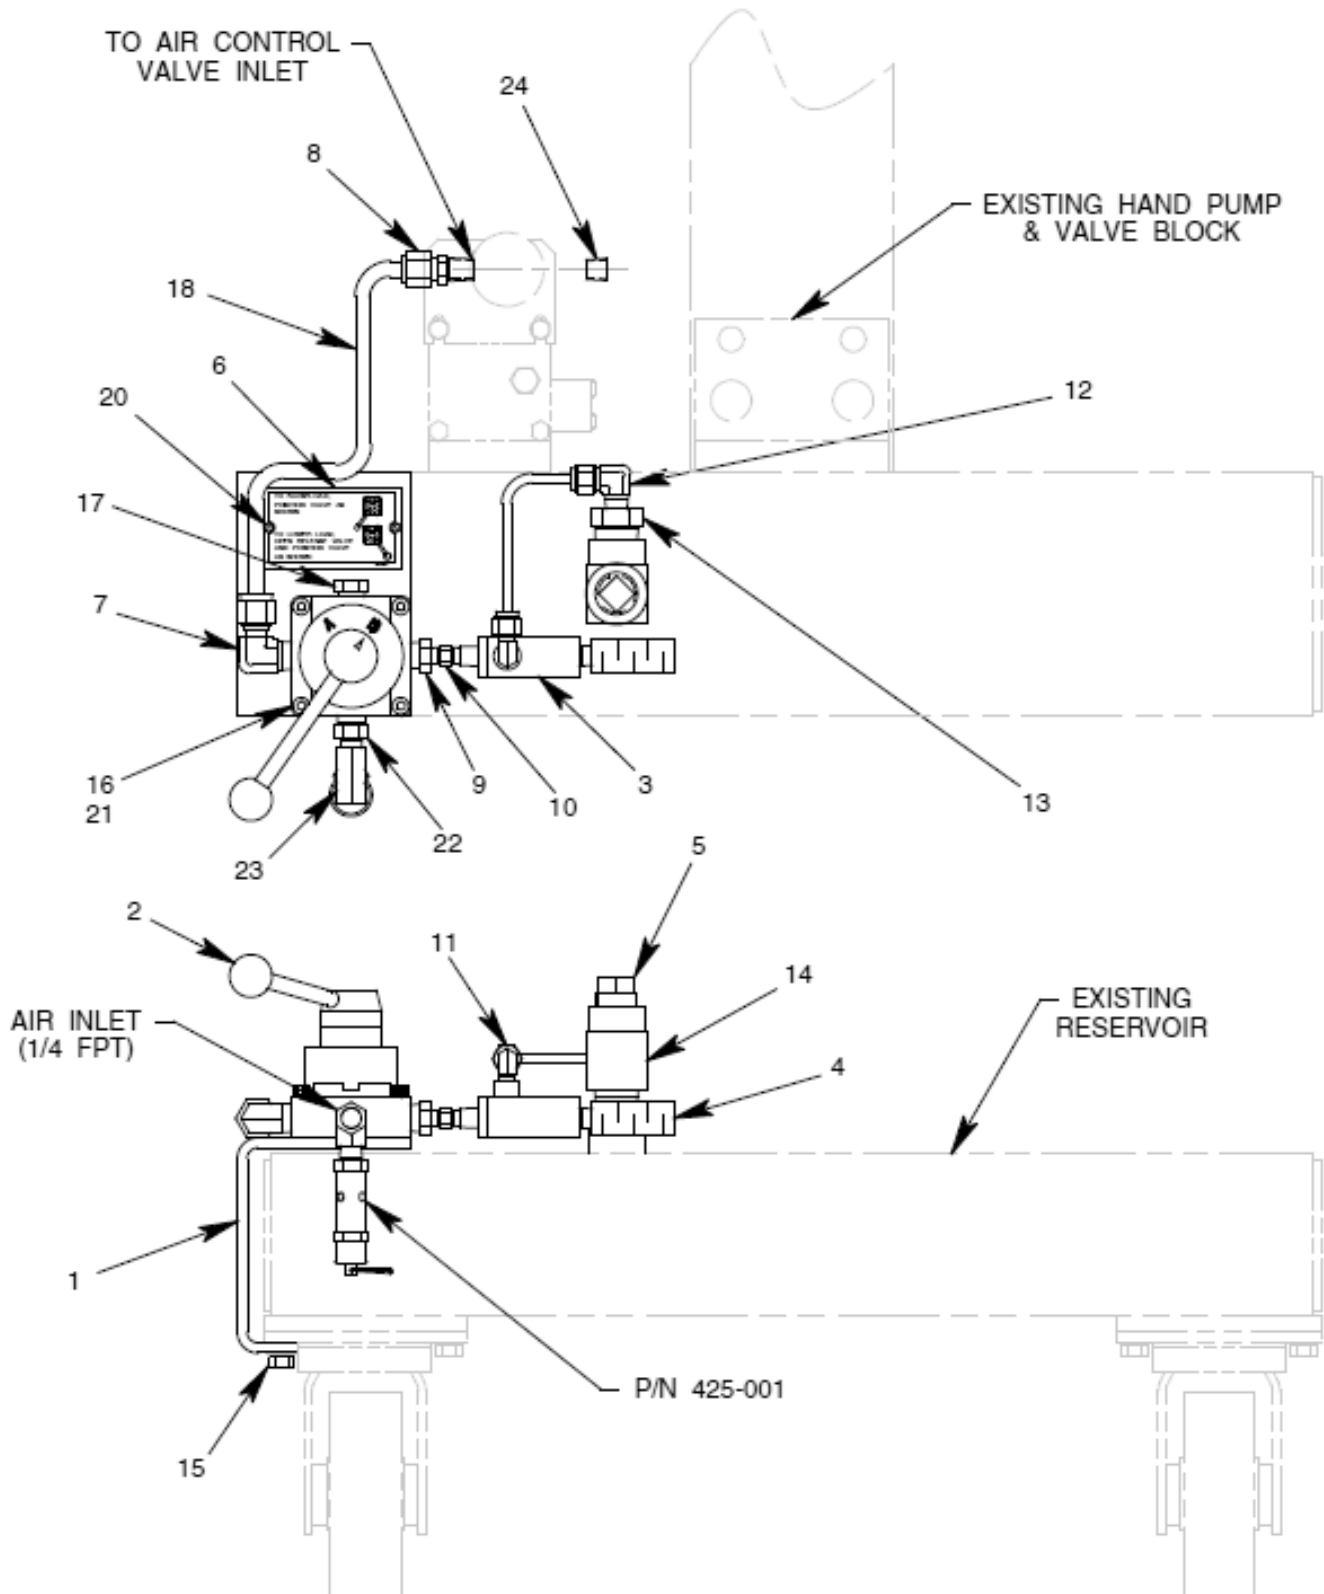




## Parts List – Figure 6

When ordering replacement parts/kits, please specify model, serial number and color of your unit.

Item	Part Number	Description	Qty
	<b>83260</b>	<b>Air Operated Vacuum Retract Kit; consists of:</b>	
1	83261	MOUNTING PLATE	1
2	86563	HAND VALVE	1
3	490-021	AIR OPERATED VAC. PUMP	1
4	472-003	MUFFLER, 1/4 FPT	1
5	86564	DIPSTICK	1
6	86562	PLACARD, INSTRUCTION	1
7	722-010	ELBOW, 3/8 T x 3/8 MPT	1
8	721-009	CONN., 3/8 T x 1/4 MPT	1
9	714-016	REDUCER, 3/8 MPT x 1/8 FPT	1
10	711-089	NIPPLE, BRASS, 1/8 MPT	1
11	722-011	ELBOW, 1/4 T x 1/8 MPT	1
12	722-021	ELBOW, 1/4 T x 1/4 MPT	1
13	714-007	REDUCER, 3/4 MPT x 1/4 FPT	1
14	713-030	STREET TEE, 3/4 NPT	1
15	321-011	HHCS, 3/8-16 x 1" LG	2
16	323-048	SHCS, 1/4-20 x 1 1/2 LG	4
17	483-004	BREATHING, 3/8 MPT	1
18	732-002	TUBE, 3/8 O.D. x .049 WALL	AR
19	732-003	TUBE, 1/4 O.D. x .035 WALL	AR
20	397-010	SELF TAPPING SCREW, #6	2
21	363-014	SPLIT LOCKWASHER, 1/4	4
22	711-030	NIPPLE, 3/8 MPT x 1/4 MPT	1
23	713-013	TEE, BRASS, 1/4 FPT	1
24	717-006	PLUG, 1/4 MPT	1

### Parts List – Figure 7

When ordering replacement parts/kits, please specify model, serial number and color of your unit.

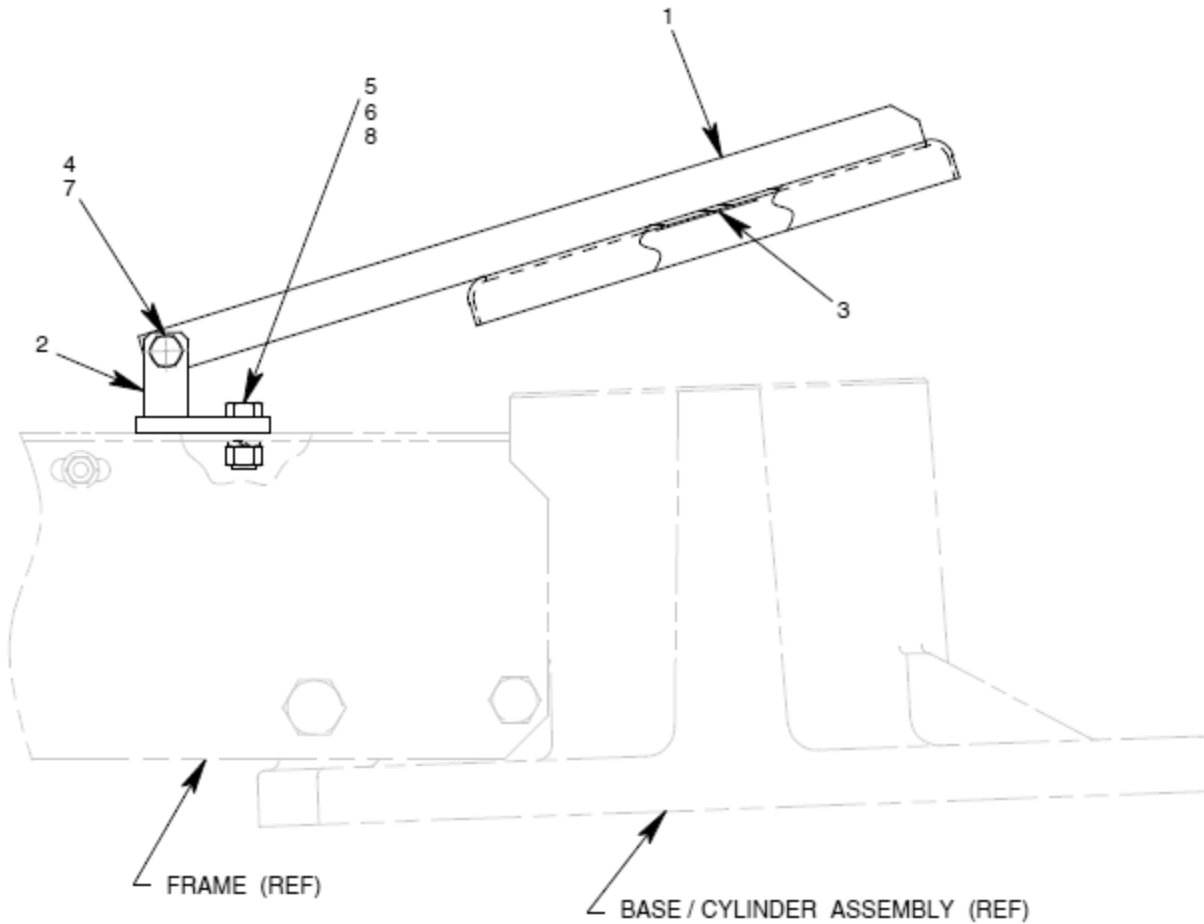

Item	Part Number	Description	Qty
	<b>83247</b>	<b>Rain Hat Kit; consists of:</b>	
1	83245	RAIN HAT	1
2	83246	RAIN HAT BRACKET	1
3	75943	STICKER, CLOSE COVER	1
4	321-058	HHCS, 5/16-18 x 1 1/2 LG	1
5	321-056	HHCS, 3/8-16 x 7/8 LG	2
6	363-003	SPLIT LOCKWASHER, 3/8	2
7	355-004	HEX LOCKNUT, 5/16-18	1
8	351-002	HEX NUT, 3/8-16	2



## **APPENDIX I**

### **Safety Data Sheet MIL-PRF-5606 Hydraulic Fluid**



Product Name: MOBIL AERO HFA  
Revision Date: 01 Oct 2015  
Page 1 of 12

## SAFETY DATA SHEET

### SECTION 1

### PRODUCT AND COMPANY IDENTIFICATION

#### PRODUCT

**Product Name:** MOBIL AERO HFA  
**Product Description:** Base Oil and Additives  
**Product Code:** 201550401020, 490110-00, 970584  
**Intended Use:** Aviation hydraulic oil

#### COMPANY IDENTIFICATION

**Supplier:** EXXON MOBIL CORPORATION  
22777 Springwoods Village Parkway  
Spring, TX. 77253 USA  
**24 Hour Health Emergency** 609-737-4411  
**Transportation Emergency Phone** 800-424-9300 or 703-527-3887 CHEMTREC  
**Product Technical Information** 800-662-4525  
**MSDS Internet Address** <http://www.exxon.com>, <http://www.mobil.com>

### SECTION 2

### HAZARDS IDENTIFICATION

This material is hazardous according to regulatory guidelines (see (M)SDS Section 15).

#### CLASSIFICATION:

Flammable liquid: Category 4.  
Aspiration toxicant: Category 1.

#### LABEL:

##### Pictogram:



**Signal Word:** Danger

#### Hazard Statements:

H227: Combustible liquid. H304: May be fatal if swallowed and enters airways.

#### Precautionary Statements:

P210: Keep away from flames and hot surfaces. -- No smoking. P273: Avoid release to the environment. P280: Wear protective gloves and eye / face protection. P301 + P310: IF SWALLOWED: Immediately call a POISON CENTER or doctor/physician. P331: Do NOT induce vomiting. P370 + P378: In case of fire: Use water fog, foam, dry chemical or carbon dioxide (CO2) to extinguish. P403 + P235: Store in a well-ventilated place. Keep cool. P405: Store locked up. P501: Dispose of contents and container in accordance with local regulations.

Product Name: MOBIL AERO HFA  
Revision Date: 01 Oct 2015  
Page 2 of 12

## Other hazard information:

**HAZARD NOT OTHERWISE CLASSIFIED (HNOC):** None as defined under 29 CFR 1910.1200.

## PHYSICAL / CHEMICAL HAZARDS

Material can accumulate static charges which may cause an ignition. Material can release vapors that readily form flammable mixtures. Vapor accumulation could flash and/or explode if ignited. Combustible.

## HEALTH HAZARDS

High-pressure injection under skin may cause serious damage. Excessive exposure may result in eye, skin, or respiratory irritation.

## ENVIRONMENTAL HAZARDS

No significant hazards.

<b>NFPA Hazard ID:</b>	Health: 1	Flammability: 2	Reactivity: 0
<b>HMIS Hazard ID:</b>	Health: 1*	Flammability: 2	Reactivity: 0

**NOTE:** This material should not be used for any other purpose than the intended use in Section 1 without expert advice. Health studies have shown that chemical exposure may cause potential human health risks which may vary from person to person.

## SECTION 3 COMPOSITION / INFORMATION ON INGREDIENTS

This material is defined as a mixture.

### Hazardous Substance(s) or Complex Substance(s) required for disclosure

Name	CAS#	Concentration*	GHS Hazard Codes
2,6-DI-TERT-BUTYL-P-CRESOL	128-37-0	0.1 - < 1%	H400(M factor 1), H410(M factor 1)
DISTILLATES (PETROLEUM), HYDROTREATED LIGHT	64742-47-8	5 - < 10%	H304
HYDROTREATED LIGHT NAPHTHENIC DISTILLATE (PETROLEUM)	64742-53-6	50 - < 70%	H227, H304
HYDROTREATED MIDDLE DISTILLATE (PETROLEUM)	64742-46-7	20 - < 30%	H304
TRIPHENYL PHOSPHATE	115-86-6	0.1 - < 0.25%	H400(M factor 1), H410(M factor 1)

\* All concentrations are percent by weight unless material is a gas. Gas concentrations are in percent by volume.

As per paragraph (i) of 29 CFR 1910.1200, formulation is considered a trade secret and specific chemical identity and exact percentage (concentration) of composition may have been withheld. Specific chemical identity and exact percentage composition will be provided to health professionals, employees, or designated representatives in accordance with applicable provisions of paragraph (i).

## SECTION 4 FIRST AID MEASURES

### INHALATION

Product Name: MOBIL AERO HFA  
Revision Date: 01 Oct 2015  
Page 3 of 12

Remove from further exposure. For those providing assistance, avoid exposure to yourself or others. Use adequate respiratory protection. If respiratory irritation, dizziness, nausea, or unconsciousness occurs, seek immediate medical assistance. If breathing has stopped, assist ventilation with a mechanical device or use mouth-to-mouth resuscitation.

## SKIN CONTACT

Wash contact areas with soap and water. Remove contaminated clothing. Launder contaminated clothing before reuse. If product is injected into or under the skin, or into any part of the body, regardless of the appearance of the wound or its size, the individual should be evaluated immediately by a physician as a surgical emergency. Even though initial symptoms from high pressure injection may be minimal or absent, early surgical treatment within the first few hours may significantly reduce the ultimate extent of injury.

## EYE CONTACT

Flush thoroughly with water. If irritation occurs, get medical assistance.

## INGESTION

Seek immediate medical attention. Do not induce vomiting.

## NOTE TO PHYSICIAN

If ingested, material may be aspirated into the lungs and cause chemical pneumonitis. Treat appropriately.

## SECTION 5 FIRE FIGHTING MEASURES

### EXTINGUISHING MEDIA

**Appropriate Extinguishing Media:** Use water fog, foam, dry chemical or carbon dioxide (CO<sub>2</sub>) to extinguish flames.

**Inappropriate Extinguishing Media:** Straight Streams of Water

### FIRE FIGHTING

**Fire Fighting Instructions:** Evacuate area. Prevent runoff from fire control or dilution from entering streams, sewers, or drinking water supply. Firefighters should use standard protective equipment and in enclosed spaces, self-contained breathing apparatus (SCBA). Use water spray to cool fire exposed surfaces and to protect personnel.

**Unusual Fire Hazards:** Combustible. Pressurized mists may form a flammable mixture.

**Hazardous Combustion Products:** Aldehydes, Incomplete combustion products, Oxides of carbon, Phosphorus oxides, Smoke, Fume, Sulfur oxides

### FLAMMABILITY PROPERTIES

**Flash Point [Method]:** >82°C (180°F) [ASTM D-93]

**Flammable Limits (Approximate volume % in air):** LEL: 0.7 UEL: 7.0 [Estimated]

**Autoignition Temperature:** >225°C (437°F)

## SECTION 6 ACCIDENTAL RELEASE MEASURES

### NOTIFICATION PROCEDURES

In the event of a spill or accidental release, notify relevant authorities in accordance with all applicable

regulations. US regulations require reporting releases of this material to the environment which exceed the applicable reportable quantity or oil spills which could reach any waterway including intermittent dry creeks. The National Response Center can be reached at (800)424-8802.

#### PROTECTIVE MEASURES

Avoid contact with spilled material. Warn or evacuate occupants in surrounding and downwind areas if required due to toxicity or flammability of the material. See Section 5 for fire fighting information. See the Hazard Identification Section for Significant Hazards. See Section 4 for First Aid Advice. See Section 8 for advice on the minimum requirements for personal protective equipment. Additional protective measures may be necessary, depending on the specific circumstances and/or the expert judgment of the emergency responders.

For emergency responders: Respiratory protection: respiratory protection will be necessary only in special cases, e.g., formation of mists. Half-face or full-face respirator with filter(s) for dust/organic vapor or Self Contained Breathing Apparatus (SCBA) can be used depending on the size of spill and potential level of exposure. If the exposure cannot be completely characterized or an oxygen deficient atmosphere is possible or anticipated, SCBA is recommended. Work gloves that are resistant to hydrocarbons are recommended. Gloves made of polyvinyl acetate (PVA) are not water-resistant and are not suitable for emergency use. Chemical goggles are recommended if splashes or contact with eyes is possible. Small spills: normal antistatic work clothes are usually adequate. Large spills: full body suit of chemical resistant, antistatic material is recommended.

#### SPILL MANAGEMENT

**Land Spill:** Eliminate all ignition sources (no smoking, flares, sparks or flames in immediate area). Stop leak if you can do it without risk. All equipment used when handling the product must be grounded. Do not touch or walk through spilled material. Prevent entry into waterways, sewer, basements or confined areas. A vapor suppressing foam may be used to reduce vapors. Use clean non-sparking tools to collect absorbed material. Absorb or cover with dry earth, sand or other non-combustible material and transfer to containers. Large Spills: Water spray may reduce vapor; but may not prevent ignition in closed spaces. Recover by pumping or with suitable absorbent.

**Water Spill:** Stop leak if you can do it without risk. Confine the spill immediately with booms. Warn other shipping. Remove from the surface by skimming or with suitable absorbents. Seek the advice of a specialist before using dispersants.

Water spill and land spill recommendations are based on the most likely spill scenario for this material; however, geographic conditions, wind, temperature, (and in the case of a water spill) wave and current direction and speed may greatly influence the appropriate action to be taken. For this reason, local experts should be consulted. Note: Local regulations may prescribe or limit action to be taken.

#### ENVIRONMENTAL PRECAUTIONS

Large Spills: Dike far ahead of liquid spill for later recovery and disposal. Prevent entry into waterways, sewers, basements or confined areas.

<b>SECTION 7</b>
------------------

<b>HANDLING AND STORAGE</b>
-----------------------------

#### HANDLING

Avoid contact with skin. Avoid prolonged breathing of mists and heated vapor. Prevent small spills and leakage to avoid slip hazard. Material can accumulate static charges which may cause an electrical spark (ignition source). When the material is handled in bulk, an electrical spark could ignite any flammable vapors from liquids or residues that may be present (e.g., during switch-loading operations). Use proper bonding and/or ground procedures. However, bonding and grounds may not eliminate the hazard from static



Product Name: MOBIL AERO HFA  
Revision Date: 01 Oct 2015  
Page 5 of 12

accumulation. Consult local applicable standards for guidance. Additional references include American Petroleum Institute 2003 (Protection Against Ignitions Arising out of Static, Lightning and Stray Currents) or National Fire Protection Agency 77 (Recommended Practice on Static Electricity) or CENELEC CLC/TR 50404 (Electrostatics - Code of practice for the avoidance of hazards due to static electricity).

**Static Accumulator:** This material is a static accumulator.

## STORAGE

The container choice, for example storage vessel, may effect static accumulation and dissipation. Keep container closed. Handle containers with care. Open slowly in order to control possible pressure release. Store in a cool, well-ventilated area. Storage containers should be grounded and bonded. Fixed storage containers, transfer containers and associated equipment should be grounded and bonded to prevent accumulation of static charge.

## SECTION 8 EXPOSURE CONTROLS / PERSONAL PROTECTION

### EXPOSURE LIMIT VALUES

Exposure limits/standards (Note: Exposure limits are not additive)

Substance Name	Form	Limit / Standard			NOTE	Source
2,6-DI-TERT-BUTYL-P-CRESOL	Inhalable fraction and vapor	TWA	2 mg/m3		N/A	ACGIH
DISTILLATES (PETROLEUM), HYDROTREATED LIGHT [total hydrocarbon vapor]	Non-Aerosol	TWA	200 mg/m3		Skin	ACGIH
HYDROTREATED LIGHT NAPHTHENIC DISTILLATE (PETROLEUM)	Mist.	TWA	5 mg/m3		N/A	OSHA Z1
HYDROTREATED LIGHT NAPHTHENIC DISTILLATE (PETROLEUM)	Inhalable fraction.	TWA	5 mg/m3		N/A	ACGIH
HYDROTREATED LIGHT NAPHTHENIC DISTILLATE (PETROLEUM)	Mist.	TWA	5 mg/m3		N/A	ACGIH
HYDROTREATED MIDDLE DISTILLATE (PETROLEUM)	Mist.	TWA	5 mg/m3		N/A	OSHA Z1
HYDROTREATED MIDDLE DISTILLATE (PETROLEUM)	Inhalable fraction.	TWA	5 mg/m3		N/A	ACGIH
TRIPHENYL PHOSPHATE		TWA	3 mg/m3		N/A	OSHA Z1
TRIPHENYL PHOSPHATE		TWA	3 mg/m3		N/A	ACGIH

**Exposure limits/standards for materials that can be formed when handling this product:** When mists/aerosols can occur the following are recommended: 5 mg/m<sup>3</sup> - ACGIH TLV (inhalable fraction), 5 mg/m<sup>3</sup> - OSHA PEL.

NOTE: Limits/standards shown for guidance only. Follow applicable regulations.

No biological limits allocated.

### ENGINEERING CONTROLS

The level of protection and types of controls necessary will vary depending upon potential exposure conditions.

Product Name: MOBIL AERO HFA  
Revision Date: 01 Oct 2015  
Page 6 of 12

---

Control measures to consider:

Use explosion-proof ventilation equipment to stay below exposure limits.

## PERSONAL PROTECTION

Personal protective equipment selections vary based on potential exposure conditions such as applications, handling practices, concentration and ventilation. Information on the selection of protective equipment for use with this material, as provided below, is based upon intended, normal usage.

**Respiratory Protection:** If engineering controls do not maintain airborne contaminant concentrations at a level which is adequate to protect worker health, an approved respirator may be appropriate. Respirator selection, use, and maintenance must be in accordance with regulatory requirements, if applicable. Types of respirators to be considered for this material include:

No special requirements under ordinary conditions of use and with adequate ventilation.

For high airborne concentrations, use an approved supplied-air respirator, operated in positive pressure mode. Supplied air respirators with an escape bottle may be appropriate when oxygen levels are inadequate, gas/vapor warning properties are poor, or if air purifying filter capacity/rating may be exceeded.

**Hand Protection:** Any specific glove information provided is based on published literature and glove manufacturer data. Glove suitability and breakthrough time will differ depending on the specific use conditions. Contact the glove manufacturer for specific advice on glove selection and breakthrough times for your use conditions. Inspect and replace worn or damaged gloves. The types of gloves to be considered for this material include:

If prolonged or repeated contact is likely, chemical resistant gloves are recommended. If contact with forearms is likely, wear gauntlet style gloves.

**Eye Protection:** If contact is likely, safety glasses with side shields are recommended.

**Skin and Body Protection:** Any specific clothing information provided is based on published literature or manufacturer data. The types of clothing to be considered for this material include:

If prolonged or repeated contact is likely, chemical, and oil resistant clothing is recommended.

**Specific Hygiene Measures:** Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective equipment to remove contaminants. Discard contaminated clothing and footwear that cannot be cleaned. Practice good housekeeping.

## ENVIRONMENTAL CONTROLS

Comply with applicable environmental regulations limiting discharge to air, water and soil. Protect the environment by applying appropriate control measures to prevent or limit emissions.

## SECTION 9

## PHYSICAL AND CHEMICAL PROPERTIES

**Note:** Physical and chemical properties are provided for safety, health and environmental considerations only and may not fully represent product specifications. Contact the Supplier for additional information.

## GENERAL INFORMATION

**Physical State:** Liquid

**Color:** Red

Product Name: MOBIL AERO HFA  
 Revision Date: 01 Oct 2015  
 Page 7 of 12

Odor: Characteristic  
 Odor Threshold: N/D

## IMPORTANT HEALTH, SAFETY, AND ENVIRONMENTAL INFORMATION

Relative Density (at 15 °C): 0.88  
 Flammability (Solid, Gas): N/A  
 Flash Point [Method]: >82°C (180°F) [ASTM D-93]  
 Flammable Limits (Approximate volume % in air): LEL: 0.7 UEL: 7.0 [Estimated]  
 Autoignition Temperature: >225°C (437°F)  
 Boiling Point / Range: N/D  
 Decomposition Temperature: N/D  
 Vapor Density (Air = 1): N/D  
 Vapor Pressure: [N/D at 20 °C]  
 Evaporation Rate (n-butyl acetate = 1): N/D  
 pH: N/A  
 Log Pow (n-Octanol/Water Partition Coefficient): N/D  
 Solubility in Water: Negligible  
 Viscosity: 13.8 cSt (13.8 mm<sup>2</sup>/sec) at 40 °C | 5.1 cSt (5.1 mm<sup>2</sup>/sec) at 100°C [ASTM D 445]  
 Oxidizing Properties: See Hazards Identification Section.

## OTHER INFORMATION

Freezing Point: N/D  
 Melting Point: N/A  
 Pour Point: -60°C (-76°F) [ASTM D97]  
 DMSO Extract (mineral oil only), IP-346: < 3 %wt

## SECTION 10

## STABILITY AND REACTIVITY

**REACTIVITY:** See sub-sections below.

**STABILITY:** Material is stable under normal conditions.

**CONDITIONS TO AVOID:** Open flames and high energy ignition sources.

**MATERIALS TO AVOID:** Strong oxidizers

**HAZARDOUS DECOMPOSITION PRODUCTS:** Material does not decompose at ambient temperatures.

**POSSIBILITY OF HAZARDOUS REACTIONS:** Hazardous polymerization will not occur.

## SECTION 11

## TOXICOLOGICAL INFORMATION

### INFORMATION ON TOXICOLOGICAL EFFECTS

Hazard Class	Conclusion / Remarks
<b>Inhalation</b>	
Acute Toxicity: No end point data for material.	Minimally Toxic. Based on assessment of the components.
Irritation: No end point data for material.	Elevated temperatures or mechanical action may form vapors, mist, or fumes which may be irritating to the eyes, nose, throat, or lungs.

Product Name: MOBIL AERO HFA  
 Revision Date: 01 Oct 2015  
 Page 8 of 12

<b>Ingestion</b>	
Acute Toxicity: No end point data for material.	Minimally Toxic. Based on assessment of the components.
<b>Skin</b>	
Acute Toxicity: No end point data for material.	Minimally Toxic. Based on assessment of the components.
Skin Corrosion/Irritation: No end point data for material.	May dry the skin leading to discomfort and dermatitis. Based on assessment of the components.
<b>Eye</b>	
Serious Eye Damage/Irritation: No end point data for material.	May cause mild, short-lasting discomfort to eyes. Based on assessment of the components.
<b>Sensitization</b>	
Respiratory Sensitization: No end point data for material.	Not expected to be a respiratory sensitizer.
Skin Sensitization: No end point data for material.	Not expected to be a skin sensitizer. Based on assessment of the components.
<b>Aspiration:</b> Data available.	May be fatal if swallowed and enters airways. Based on physico-chemical properties of the material.
<b>Germ Cell Mutagenicity:</b> No end point data for material.	Not expected to be a germ cell mutagen. Based on assessment of the components.
<b>Carcinogenicity:</b> No end point data for material.	Not expected to cause cancer. Based on assessment of the components.
<b>Reproductive Toxicity:</b> No end point data for material.	Not expected to be a reproductive toxicant. Based on assessment of the components.
<b>Lactation:</b> No end point data for material.	Not expected to cause harm to breast-fed children.
<b>Specific Target Organ Toxicity (STOT)</b>	
Single Exposure: No end point data for material.	Not expected to cause organ damage from a single exposure.
Repeated Exposure: No end point data for material.	Not expected to cause organ damage from prolonged or repeated exposure. Based on assessment of the components.

## TOXICITY FOR SUBSTANCES

NAME	ACUTE TOXICITY
2,6-DI-TERT-BUTYL-P-CRESOL	Oral Lethality: LD50 0.89 g/kg (Rat)

## OTHER INFORMATION

### For the product itself:

Repeated and/or prolonged exposure may cause irritation to the skin, eyes, or respiratory tract. Small amounts of liquid aspirated into the lungs during ingestion or from vomiting may cause chemical pneumonitis or pulmonary edema.

### Contains:

Base oil severely refined: Not carcinogenic in animal studies. Representative material passes IP-346, Modified Ames test, and/or other screening tests. Dermal and inhalation studies showed minimal effects; lung non-specific infiltration of immune cells, oil deposition and minimal granuloma formation. Not sensitizing in test animals.

The following ingredients are cited on the lists below: None.

--REGULATORY LISTS SEARCHED--

Product Name: MOBIL AERO HFA  
Revision Date: 01 Oct 2015  
Page 9 of 12

1 = NTP CARC  
2 = NTP SUS

3 = IARC 1  
4 = IARC 2A

5 = IARC 2B  
6 = OSHA CARC

## SECTION 12

## ECOLOGICAL INFORMATION

The information given is based on data available for the material, the components of the material, and similar materials.

### ECOTOXICITY

Material -- Not expected to be harmful to aquatic organisms.

### MOBILITY

More volatile component -- Highly volatile, will partition rapidly to air. Not expected to partition to sediment and wastewater solids.

Less volatile component -- Low solubility and floats and is expected to migrate from water to the land. Expected to partition to sediment and wastewater solids.

### PERSISTENCE AND DEGRADABILITY

#### Biodegradation:

Components -- Expected to be inherently biodegradable

### BIOACCUMULATION POTENTIAL

Majority of components -- Has the potential to bioaccumulate, however metabolism or physical properties may reduce the bioconcentration or limit bioavailability.

## SECTION 13

## DISPOSAL CONSIDERATIONS

Disposal recommendations based on material as supplied. Disposal must be in accordance with current applicable laws and regulations, and material characteristics at time of disposal.

### DISPOSAL RECOMMENDATIONS

Product is suitable for burning in an enclosed controlled burner for fuel value or disposal by supervised incineration at very high temperatures to prevent formation of undesirable combustion products. Protect the environment. Dispose of used oil at designated sites. Minimize skin contact. Do not mix used oils with solvents, brake fluids or coolants.

### REGULATORY DISPOSAL INFORMATION

RCRA Information: The unused product, in our opinion, is not specifically listed by the EPA as a hazardous waste (40 CFR, Part 261D), nor is it formulated to contain materials which are listed as hazardous wastes. It does not exhibit the hazardous characteristics of ignitability, corrosivity or reactivity and is not formulated with contaminants as determined by the Toxicity Characteristic Leaching Procedure (TCLP). However, used product may be regulated.

**Empty Container Warning** Empty Container Warning (where applicable): Empty containers may contain residue and can be dangerous. Do not attempt to refill or clean containers without proper instructions. Empty drums should be

Product Name: MOBIL AERO HFA  
Revision Date: 01 Oct 2015  
Page 10 of 12

completely drained and safely stored until appropriately reconditioned or disposed. Empty containers should be taken for recycling, recovery, or disposal through suitably qualified or licensed contractor and in accordance with governmental regulations. DO NOT PRESSURISE, CUT, WELD, BRAZE, SOLDER, DRILL, GRIND, OR EXPOSE SUCH CONTAINERS TO HEAT, FLAME, SPARKS, STATIC ELECTRICITY, OR OTHER SOURCES OF IGNITION. THEY MAY EXPLODE AND CAUSE INJURY OR DEATH.

## SECTION 14 TRANSPORT INFORMATION

### LAND (DOT)

**Proper Shipping Name:** COMBUSTIBLE LIQUID, N.O.S. (Distillates (Petroleum), Hydrotreated Light)  
**Hazard Class & Division:** COMBUSTIBLE LIQUID  
**ID Number:** NA1993  
**Packing Group:** III  
**ERG Number:** 128  
**Label(s):** NONE  
**Transport Document Name:** NA1993, COMBUSTIBLE LIQUID, N.O.S. (Distillates (Petroleum), Hydrotreated Light), COMBUSTIBLE LIQUID, PG III

Footnote: This material is not regulated under 49 CFR in a container of 119 gallon capacity or less when transported solely by land, as long as the material is not a hazardous waste, a marine pollutant, or specifically listed as a hazardous substance.

**LAND (TDG):** Not Regulated for Land Transport

**SEA (IMDG):** Not Regulated for Sea Transport according to IMDG-Code

**Marine Pollutant:** No

**AIR (IATA):** Not Regulated for Air Transport

## SECTION 15 REGULATORY INFORMATION

**OSHA HAZARD COMMUNICATION STANDARD:** This material is considered hazardous in accordance with OSHA HazCom 2012, 29 CFR 1910.1200.

**Listed or exempt from listing/notification on the following chemical inventories:** AICS, DSL, ENCS, IECSC, KECI, PICCS, TCSI, TSCA

**EPCRA SECTION 302:** This material contains no extremely hazardous substances.

**SARA (311/312) REPORTABLE HAZARD CATEGORIES:** Fire. Immediate Health. Delayed Health.

**SARA (313) TOXIC RELEASE INVENTORY:** This material contains no chemicals subject to the supplier notification requirements of the SARA 313 Toxic Release Program.

Product Name: MOBIL AERO HFA  
 Revision Date: 01 Oct 2015  
 Page 11 of 12

The following ingredients are cited on the lists below:

Chemical Name	CAS Number	List Citations
DISTILLATES (PETROLEUM), HYDROTREATED LIGHT	64742-47-8	1, 17, 18
HYDROTREATED LIGHT NAPHTHENIC DISTILLATE (PETROLEUM)	64742-53-6	1, 4, 13, 17, 18
HYDROTREATED MIDDLE DISTILLATE (PETROLEUM)	64742-46-7	1, 4, 17, 18

--REGULATORY LISTS SEARCHED--

1 = ACGIH ALL	6 = TSCA 5a2	11 = CA P65 REPRO	16 = MN RTK
2 = ACGIH A1	7 = TSCA 5e	12 = CA RTK	17 = NJ RTK
3 = ACGIH A2	8 = TSCA 6	13 = IL RTK	18 = PA RTK
4 = OSHA Z	9 = TSCA 12b	14 = LA RTK	19 = RI RTK
5 = TSCA 4	10 = CA P65 CARC	15 = MI 293	

Code key: CARC=Carcinogen; REPRO=Reproductive

<b>SECTION 16</b>	<b>OTHER INFORMATION</b>
-------------------	--------------------------

N/D = Not determined, N/A = Not applicable

**KEY TO THE H-CODES CONTAINED IN SECTION 3 OF THIS DOCUMENT (for information only):**

H227: Combustible liquid; Flammable Liquid, Cat 4  
 H304: May be fatal if swallowed and enters airways; Aspiration, Cat 1  
 H400: Very toxic to aquatic life; Acute Env Tox, Cat 1  
 H410: Very toxic to aquatic life with long lasting effects; Chronic Env Tox, Cat 1

**THIS SAFETY DATA SHEET CONTAINS THE FOLLOWING REVISIONS:**

Revision Changes:  
 Section 01: Company Mailing Address information was modified.  
 Section 05: Hazardous Combustion Products information was modified.  
 Section 15: List Citations Table information was modified.  
 Section 15: National Chemical Inventory Listing information was modified.  
 Section 14: Marine Pollutant information was modified.  
 Composition: Component Table information was modified.  
 Section 08: Exposure Limits Table information was modified.  
 Section 16: Revision Information - Implementation of GHS requirements phrase. information was deleted.

The information and recommendations contained herein are, to the best of ExxonMobil's knowledge and belief, accurate and reliable as of the date issued. You can contact ExxonMobil to insure that this document is the most current available from ExxonMobil. The information and recommendations are offered for the user's consideration and examination. It is the user's responsibility to satisfy itself that the product is suitable for the intended use. If buyer repackages this product, it is the user's responsibility to insure proper health, safety and other necessary information is included with and/or on the container. Appropriate warnings and safe-handling procedures should be provided to handlers and users. Alteration of this document is strictly prohibited. Except to the extent required by law,



Product Name: MOBIL AERO HFA  
Revision Date: 01 Oct 2015  
Page 12 of 12

re-publication or retransmission of this document, in whole or in part, is not permitted. The term, "ExxonMobil" is used for convenience, and may include any one or more of ExxonMobil Chemical Company, Exxon Mobil Corporation, or any affiliates in which they directly or indirectly hold any interest.

---

Internal Use Only

MHC: 2A, 0, 0, 0, 1, 1

PPEC: C

DGN: 2005454XUS (552975)

---

Copyright 2002 Exxon Mobil Corporation, All rights reserved